UNCLASSIFIED

AD 402 207

Reproduced by the

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


402 207

SPADATS SYSTEM SUPPORT

TECHNICAL DOCUMENTARY REPORT ESD-TDR-63-334

Z JANUARY 1963

496L SYSTEM PROGRAM OFFICE
ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachussetts

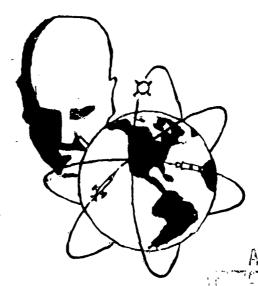

MAY 7 1938

(Prepared by Wolf R and D Corporation, Concord, Massachussetti TUSIA

19.75

Best Available Copy

ESD-TOR-63-334 0 13 294590

SUPPORT

lv. incl. illus, fables



The programs described in this report were developed under the rollowing contracts:

19 Contracte AF19(604) 5523, and others

AF19(604) 6344

AF19(604) 7740

AF19(628) 663

AF19(628) 2051

Research and Development Corporation

P.O. Box 136, West Concord, Massachusetts

PREFACE

This volume contains the complete descriptions and operating instructions for a collection of programs used at the SPADATS Center, Ent Air Force Base, Colorado Springs, Colorado The collection is primarily useful as an aid to analysts in their task of positively identifying objects detected in space. The documentation does not purport to describe a total system, but rather those programs which were deemed necessary to complement and support an already existing one.

The major portion of these programs were originally developed under the guidance and direction of Dr. Eberhard W. Wahl. Valuable assistance in the analysis of the problems involved was also rendered by Dr. H. Beat Wackernagel, Mr. Edward F. Casey, Mr. Laurence W. Cochbert, Mr. Richard F. Jenney(WRDC), and Mr. Baruch Rosenberg (WRDC). Three of the programs (ASUM, ISUM and SSUM) were developed and written by the Air Force in Colorado Springs.

Section	S	ubsection
3	STANDARD CARD FORMATS	
	ELEMENT Cards	1
,	SENSOR or STATION Card	2
	OBSERVATION Card	3
	SCHEDULE TAPE System Cards	4
4	TABLES	
	B2 Assign Deck	1
	' IOPS, PROC Errors	2
	SPSJOB Option	3
	SPS Operating Summary	4
5	INPUT/OUTPUT	
	PSR, Position Situation Report (SITRPT)	1
	REDUCT, Nodal Crossing Reduction	2
	ROC, Radar Orbit Computation	3
	LOCVEC, Vector Coordinates for Lockheed	4
	CCOE, Cartesian Coordinates from Orbital Elements	s 5
	RESPLT, Residual Plot	6
	PREPINT, Satellite Situation Report from Nodal	
	Elements	7
	MAKETAPE, Make Input Tape for TELTYP	8
	XYZLAR, Look Angle Report from x, y, z Coordinate	s 9
	POSE, Point Search Ephemeris	10
	ORPS, Orbital Plane Search	11
	ASUM, Observation Acquisition File Summary	12
	SSUM, Sensor File Summary	13
	ISUM, Information File Summary	14
	TELTYP, Magnetic Output Tape to Teletype	
	Tape Conversion	15
	BMEWSDT BMEWS Paper Tane Conversion	16

CONTENTS

Section		Subsection
1	PROGRAM DESCRIPTION	
	PSR, Position Situation Report (SITRPT)	1
	REDUCT, Nodal Crossing Reduction	2
	ROC, Radar Orbit Computation	3
	LOCVEC, Vector Coordinates for Lockheed	4
	CCOE, Cartesian Coordinates from Orbital Element	s 5
	RESPLT, Residual Plot	6
	PREPINT, Satellite Situation Report from Nodal	
	Elements	7
	MAKETAPE, Make Input Tape for TELTYP	8
	XYZLAR, Look Angle Report from x, y, z Coordinate	s 9
	POSE, Point Search Ephemeris	10
	ORPS, Orbital Plane Search	11
	ASUM, Observation Acquisition File Summary	12
	SSUM, Sensor File Summary	13
	ISUM, Information File Summary	14
	TELTYP, Magnetic Output Tape to Teletype	
	Tape Conversion	15
	BMEWSPT, BMEWS Paper Tape Conversion	16
2	SUBROUTINES -	
	CONYRB, Obtain Year Constants	1
	NHOLY, Remove Overpunch (Fix Pt.)	2
	PROPR, Properize Argument (0 to 2π)	3
	SDAY, Gregorian Nate from Smithsonian Day	4
	SHOLY, Restore Hollerith Sign	5
	SMITH, Obtain Theta Greenwich	6
	UNHOLY, Remove Overpunch (Flt. Pt.)	7
	YRDAY, Convert to Smithsonian Day	8
	YRMDY, Convert to Smithsonian Day from	
	Yr., Mth., Day	9
	XYZSB. Analytical Integration Routine	10

ILLUSTRATIONS

Section		Subsection	Page
1	Angles β, a*, η	2	41
1	Representation of Radar Run	3	2
1	Relation Between Quantities (ROC)	3	14
í	Format of Lockheed Data Tape	${4 \choose 4}$	6 7
1	Graphic Representation of New Piece		
	and Maneuver	6	1
. 1	Angle β	7	13
2	Projection of Orbit on Celestial Sphere	10	4
1	Angle η	11	8
1	Acquisition File	12	3
1	Sensor File	13	2
i	Information File	14	3
i	Format of BMEWS Word	i 6	2
1	BMEWS Data Flow	16	4
1	BMEWS Message on Input Tape	16	6
1	BMEWS Message in Core	16	7
1	Standard Observation Format	16	9
	WIRING DIAGRAMS		
1	IBM 523 Summary Punch	. 6	4
	$\triangle t(y)$ vs. \triangle Rev.(x)		
1	IBM 523 Summary Punch	6	5
	$V \text{ Mag.}(y) \text{ vs. } \triangle \text{ Rev.}(x)$		

1.1 PSR, Position Situation Report (SITRPT)

1.2 Function

The position and other status information on the catalogued satellites is supplied by this program. For a specified time either or both of the following types of reports can be produced:

- a) The Position Situation Report.
- b) The Satellite Situation Report.

The Position Situation Report shows the status of all satellites at a particular time each day. This report is issued in two forms:

- 1. A complete printout prepared for off-line printing through the UBC.
- 2. A truncated version which can be punched on 5-level paper tape for teletype transmission.

Because this report includes information on all known objects, it may contain classified information. The reports are appropriately marked automatically by the computer based on the classification note stored in the Information file of the SEAI tape. See block format in ISUM writeup, section 1-14.

The Satellite Situation Report contains only the information not marked as classified in the Information File.

1.3 Input

In addition to the Schedule Tape control cards, this program requires at least one parameter card (P in col. 80). The first of these parameter cards specifies the following information:

- 1. The output option (col. 1):
 - a) 0 = Position Situation Report
 - b) 1 = Satellite Situation Report
 - c) 2 = Both Reports

- 2. The time at which the report is desired:
 - a) Two digits for hour (cols. 2, 3)
 - b) Two digits for minutes (cols. 4, 5)
 - c) Two digits for day of month (cols. 9, 10)
 - d) Three alphanumeric digits for the name of the month (cols. 12 to 14)
 - e) Four digits for the year (cols. 16 to 19)
 - f) Z punch to signify zebra time (col. 6)
- 3. The Satellite Situation Report output code (col. 23):
 - a) Blank or zero (0) will suppress print of debris. A test is made for a one punch in character two of the first word of the I-File
 - b) One (1) will supply information on all satellites.
- 4. The Position Situation Report output code (col. 24):
 - a) Blank or zero (0) perigee and apogee are printed in statute miles.
 - b) One (1) perigee and apogee in kilometers.
- 5. Parameter card indicator (P in col. 80)

Additional parameter cards can be included. These will be treated as comment cards which will be printed immediately following Part I of the Satellite Situation Report.

The Element file and Information file of the SEAI tape supply the data required to compute the position information requested.

1.4 Output

The output on logical eleven (11) contains the following reports:

- 1. The Position Situation Report if the output option zero (0) or two (2) used.
- 2. The Satellite Situation Report if the output option one (1) or two (2) used.

The Position Situation Report supplies the data listed below:

- a) Time and classification of the report.
- b) Satellite name, number and element number.
- c) Latitude and longitude west, both in degrees, at the time of the report.

- d) The orbital elements, including the inclination in degrees, the anomalistic period in minutes, and the eccentricity.
- e) The apogrand perigee in statute miles or kilometers, depending on the output code used in col. 24.
- f) The revolution number at the time of the report and the RAN, L_N , T_N of this revolution.
- g) The classification of the satellite this field will be blank if the satellite is unclassified.

The Satellite Situation Report is comprised of the following information:

- Part I Objects in orbit inclusive or exclusive of debris depending on the code used in col. 23 of the first parameter card.
 - a) Time of Report
 - b) Satellite name, code name, source and launch date.
 - c) The anomalistic period in minutes, the inclination in degrees, the apogee and perigee in statute miles.
 - d) Transmitting frequencies, if any.
 - e) Comments from the parameter cards which were included as input data, such as:

1961 OMICRON 3-52 FIFTY METALOBJECTS IN PLANE OF 61 OMICRON 1 AND 61 OMICRON 2 ORBITS

Part II - Object removed from orbit.

- a) Satellite name, code, name and source.
- b) Launch date and decay date.

1.5 Processing

The first parameter card is deciphered in the CONBUF area to determine the time requested for the report. The "debris", output, and code switches are set according to the selection made on this first card.

The elements are loaded into the EBLOC by the ELMLOD routine. The first entry of the I-File is read and matched against the first element in the EFILE. If the two files are in phase, the computations are initiated for the time requested. The appropriate report or reports are generated according to the internal switches recorded. These switch settings are a result of the paths selected by the first parameter card.

If the IFILE and EFILE do not match, a test is made on the satellite number. A satellite number in the EFILE which is smaller than that in the IFILE results in the comment "NO DATA IN IFILE." These comparisons and the comments generated by them continue until both files are again in phase or empty. This procedure is followed since both files are assumed to be arranged in ascending order by the satellite number.

1, 5.1 Error Messages

- OVERFLOW AT JA = _____. Comment will be printed on off-line output and an exit made to the executive program.
- 2. SUBROUTINE ERROR AT JA = _____. This will be printed on off-line output when an error return is made from any subroutine. An exit will be made to the executive program.

1. o Formulation

Initial computations from input elements as computed in BEGIN:

$$p_0 = h_{x_0}^2 + h_{y_0}^2 + h_{z_0}^2$$

$$W_{\mathbf{x}} = h_{\mathbf{x}_0} / \sqrt{p_0}$$

$$W_y = h_{y_0} / \sqrt{p_0}$$

$$W_z = \cos i = h_{z_0} / \sqrt{p_0}$$

$$\sin i = \sqrt{1 - \cos^2 i}$$

$$i = tan^{-1} \frac{sin i}{cos i}$$

$$\sin \Omega = W_x / \sin i$$

$$\cos \Omega = -W_y/\sin i$$

$$\begin{split} \Omega_{o} &= \tan^{-1} \frac{\sin \Omega}{\cos \Omega} \\ e_{o} &= \sqrt{a_{x}N_{o} + a_{y}N_{o}} \\ a_{o} &= p_{o} / (1 - e_{o}^{2}) \\ n_{o} &= k_{e} / a_{o}^{3/2} \\ c'' &= -360 M_{o}^{2} co / \pi \\ q_{o} &= a_{o} (1 - e_{o}) \\ k_{e} L_{so}^{2} &= k_{e} J^{3} \left\{ 3 - 5 e_{o}^{2} - |\cos i|(1 - 3/2 e_{o}^{2}) - \sin^{2} i \cdot (4 - \frac{27}{4} e_{o}^{2}) \right\} \\ U_{o} &= L_{o} - \Omega_{o} \text{ if } W_{z_{o}} \geq o \\ U_{o} &= L_{o} + \Omega_{o} \text{ if } W_{z_{o}} < o \end{split}$$

- 2. Compute $t = (t_i t_o)$. 1440 where t_i is time at which position report is requested. Enter XYZSB to get position at time t_i
- 3. Compute θ_G at t_o :

$$\theta_{G} = \theta_{o} + .9856472 \cdot t_{o} \text{ (Days)} + 360.9856472 \cdot t_{o} \text{ (fraction)}$$

4. Enter subroutine SUBPT to get sub-latitude and sub-longitude points:

$$\lambda_{E} = \tan^{-1}(y/x) - .0043752691 \cdot t - \theta_{G}$$

$$\phi = \tan^{-1}\left[\frac{U_{z}}{(1-f)^{2}\sqrt{1-U_{z}^{2}}}\right]$$

5. Compute remainder of output:

PERIOD =
$$2\pi/XN$$

PERIGEE = a (1-e) - 1
APOGEE = a (1+e) -1

REV = REV_o +
$$\left[\frac{T/P_{N}}{N}\right]$$
 where

$$P_{N} = \frac{2\pi}{n} \left\{1 - \frac{3}{2} J_{2} \left(\frac{a_{e}}{P}\right)^{2} \left[3 - \frac{e^{2}}{2} - \sin i^{2} \left(4 - \frac{3}{4e^{2}}\right)\right]\right\}$$

$$E_{o} = \tan^{-1} \left[\frac{\sqrt{1 - e^{2}} a_{y_{n}}}{e^{2} + a_{x_{n}}}\right]$$

$$M_{N} = E_{o} + \frac{\sqrt{1 - e^{2}} a_{y_{n}}}{1 + a_{x_{n}}}$$

$$\omega = \tan^{-1} \left[\frac{a_{y_{n}}}{a_{x_{n}}}\right]$$

$$M_{A} = L - \omega \pm \Omega : -if W_{z} \ge o, +if W_{z} < o$$

$$t_{N} = t_{i} + \frac{M_{N} - M_{A}}{1440 \cdot n} \quad \text{where } |M_{N} - M_{A}| \le \pi$$

$$RA_{N} = \Omega + \Omega \left[\left(t_{n} - t_{o}\right) \cdot 1440 - t\right)\right]$$

$$\theta_{G} = \theta_{Go} + .9856472 \cdot t_{n} (days) + 360.9856472 \cdot t_{n} (fraction)$$

$$L_{N} = 360 - RA_{N} + \theta_{G} \text{ if } RA_{N} > \theta_{G}$$

$$L_{N} = \theta_{G} - RA_{N} \text{ if } RA_{N} < \theta_{G}$$

$$L_{N} = 0 \text{ if } RA_{N} = \theta_{G}$$

1.7 Glossary

Location	Symbol	Meaning
CCLAS		1, some satellite in I-file is confidential
		0, no confidential satellites
CHAR		Number of non-blank characters in
•		transmitting frequencies
CLAS		Classification of satellite, from I file
ELN	Ln	Longitude at node
EMA	Ma	Mean anomaly at report time
EMN	Mn	Mean anomaly at node
ENDDT	**	Decay date
ENDDT1		Decay date
EOESW		END OF ELEMENT Switch
		0, continue reading elements from EBLO

processed


1, all elements in EBLOC have been

EOS		END OF SAVED ELEMENTS Switch	
		0, continues reading elements from SAVE file	
		1, all elements from SAVE file have been processed	
ERJ		Contains octal address of location where subroutine	
		or overflow error occurred	
ERJH		Lor R indicating which half of ERJ	
FLC1		Fractional part of rotation rate of earth	
		(deg/solar day) = .9856472	
FLC2		Rotation rate of earth (deg/solar day) 360.9856472	
FNUM		Number of lines of transmitting frequencies to	
		be printed	
FSQ	\mathbf{f}^2	f^2 where f is flattening of earth = .112381556 x 10 ⁻⁴	
FTNOTE		Footnote switch	
		0, do not print footnote	
		1, print footnote to give units of heliocentric	
		satellite output	
HCLEM		Array for storage of elements of heliocentric	
		satellites from I file.	
HCLAS		Classification of satellite	
HDCLAS1		Contains first half of classification heading	
HDCLAS2		Contains second half of classification heading	
HELIO		0, elements available in E file	
		1, position uncertain	
		2, heliocentric satellite	
	q	Perigee distance	
HQ1	Q	Apogee distance	
HQ2		Year part of object name	
HSAT1		Object name	
HSAT2		0, or space, always include satellite in Satellite	
JUNK		Situation Report	
		1, do not include in Satellite Situation Report unless	
		output Code 1 is desired.	
LNCH		Launch Date	
LNCH1		Launch Date	
KILOM		0, perigee and apogee output to be in statute miles	
		1, perigee and apogee output to be in kilometers	


LONGW	L	Longitude (west) of subsatellite point
OBJNO		Satellite number
OPT		Output options
		0, output is a Position Situation Report
٠		1, output is a Satellite Situation Report
	•	2, output is both reports
OUTPUT		Satellite Situation Report output code
		0, or space, do not print satellites having a "1"
	i	punch in character 2 of the first word in I file
	•	1, print all satellites
PERIOD	Pa	Anomalistic period (in minutes)
PGCNT	a	Page count
PHI	ф .	Latitude of subsatellite point
PINCL	i	Inclination
RAN	RA_N	Right ascension of ascending node
REV	REV	Revolution number
SATI		Satellite number from I file
SCLAS		1, at least one satellite is SECRET
		0, no SECRET satellites
SINDXi		Saves index register 1
SSLAM	$\lambda_{\mathbf{D}}$	Longitude (east) of subsatellite point
SSLAT	_ E.	Latitude of subsatellite point
TCLAS		1, at least one satellite is TOP SECRET
		0, no TOP SECRET satellites
TDMON		Table used to convert month name to month
		number
TFBUT		Array for output of transmission frequencies
TECNT		Count of number of characters of transmitting
	•	frequency when packed for output
THGRN	$\theta_{\mathbf{G}}$	θ _C at time of report
TI	t _i	Time of report in days since 1950
TIF	1	Fractional part of TI
TiHi		Output buffers for time of report
T1H2		Output buffers for time of report
T1H3		Output buffers for time of report

T1W		Integer part of TI
TN	t _{n} .	Time of node
TNI	11	Time of node (integer)
TNF		Time of node (fraction)
TOI		Temporary, used in computing θ_G
UCLAS	•	0, no unclassified satellites
		1, at least one unclassified satellite
UPESW	,	E file switch
		0, no elements in E file for previous satellite
		in I file; do not pick up more elements
•	•	i, read next element from E file
UPISW		I file switch
		0, no elements in I file for previous satellite
		from E file; do not pick up next element from I file
		1, read next satellite from I file.
UPSSW		SAVE file switch
•		0, no elements in SAVE file for previous
	. •	satellite; do not pick up next element from
•	·	SAVE file.

1, read next element from SAVE file

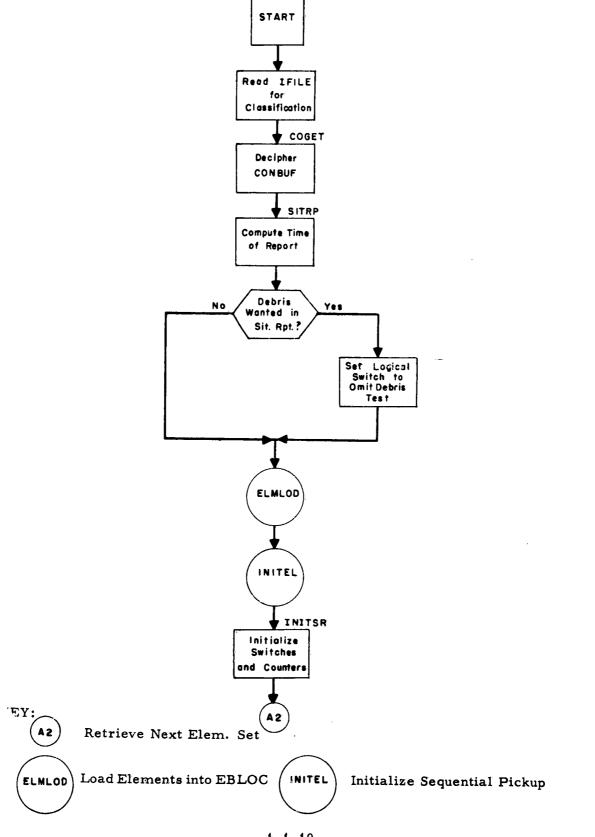


1-1-10

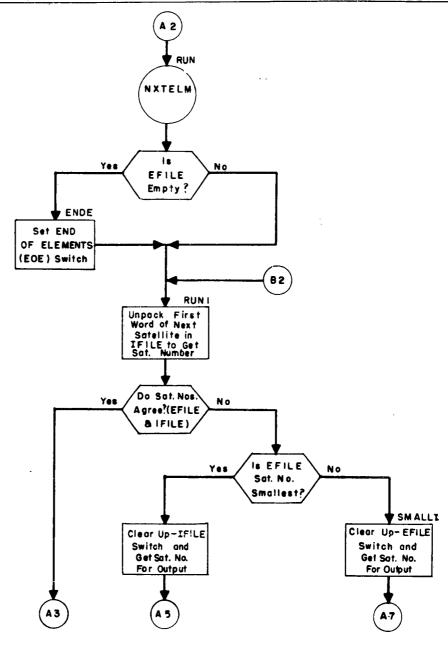


Retrieves Next Element Set from EBLOC


- (A3) Compute Variables
- (A5) Get Classification and Output Option
- (A7) Check to See if Satellite has Decayed

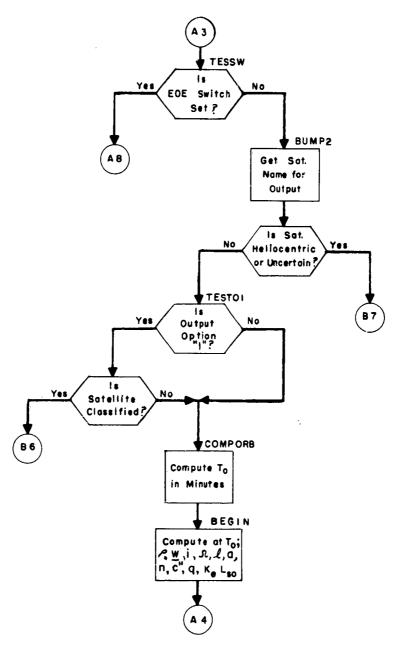


- (A4) Compute Variables for Reports
- (A8) Test Output Options
- $\left(\mathbf{86} \right)$ Test Switches EFILE and IFILE
- 87) Test Condition of Sat.

XYZSB

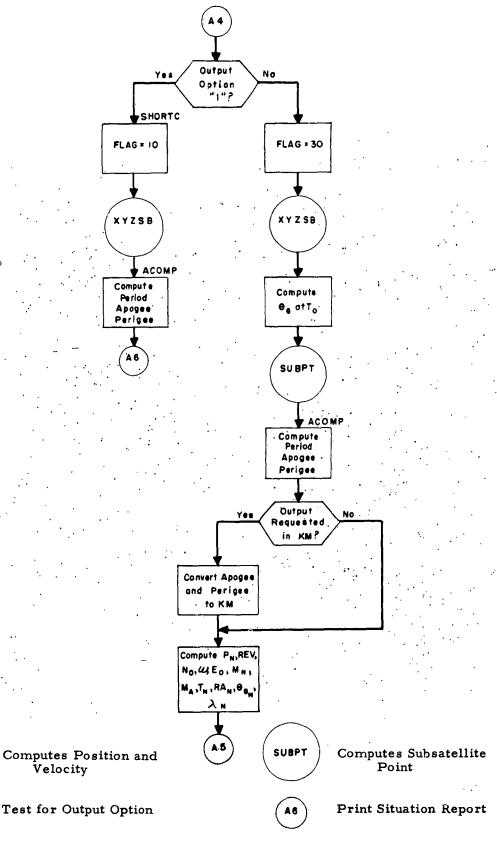


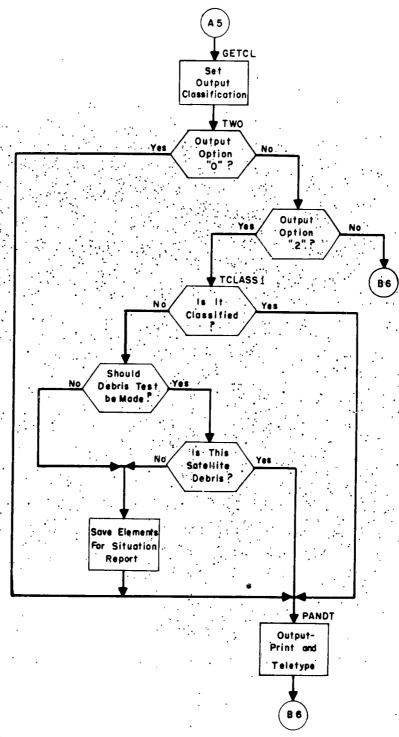


- (A6) Print Situation Report
- (86) Determine if EFILE and IFILE in Phase

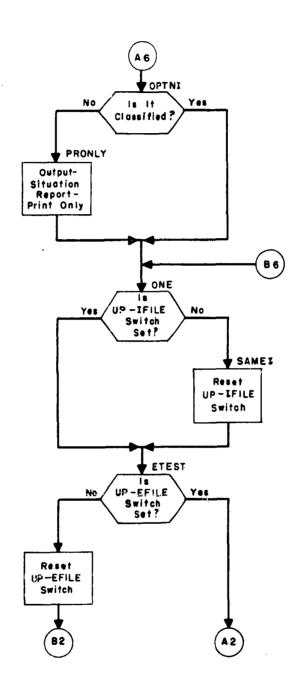


- A2) Retrieve Next Element Set
- (82) Unpack First Word of IFILE to Get Sat. No.

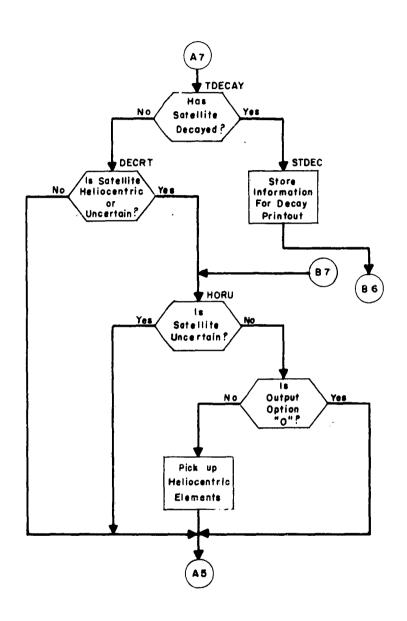

- (A5) Test for Output Option
- Determine if EFILE and IFILE in Phase

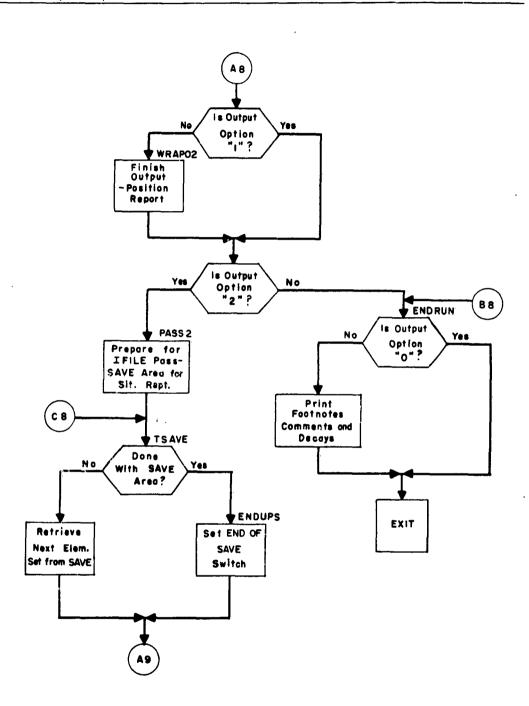

Determine if SAVE and IFILE in Phase

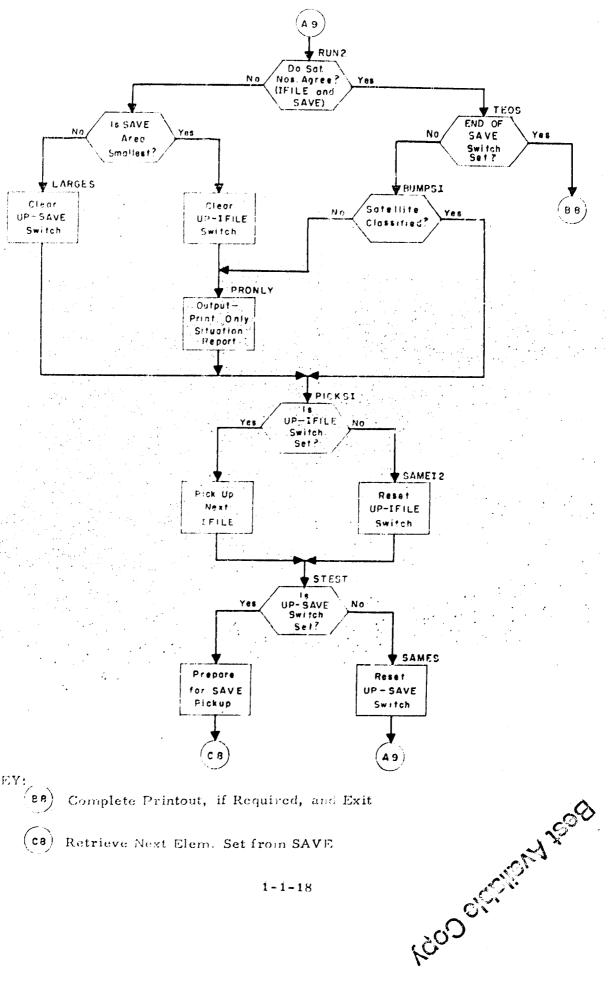

- Complete Printout, if Required, and Exit
- Retrieve Next Elem. Set from SAVE

1-1-18

2.1 REDUCT, Nodal Crossing Reduction

2.2 Function

The Nodal Crossing Reduction Program, hereafter referred to as the Reduction Program, reduces observations to the last nodal crossing; computes certain differences between parameters as computed from the observation and as computed from orbital elements; may compare the differences against predetermined tolerance limits; and produces results in printed and/or teletype format.

The differences, or residuals, may be used by the analyst to determine the necessity of updating existing orbital elements, to determine new elements for satellite debris, to redefine the orbit of a "lost" satellite, or to identify the observation.

The observation may be visual, radar, Baker-Nunn, doppler, or direction finder. The first three are treated by that portion of the Reduction Program known as the General Reduction, and the last two by the Doppler Reduction and Direction Finder Reduction, respectively. The observation types may be intermixed from different sensors, or for different satellites:

Table 2.1 specifies the particular residuals computed by each of the sections of the Reduction Program.

Table 2.1

Residuals Computed by Various Program Sections

Program Section	Time Residual	Right Ascension Residual	Height Residual
Visual Radar Baker-Nunn Doppler Direction Finder	x x x x x	x x x	х

For clarification of subsequent sections the following definitions are made:

A predicted quantity (generally indicated with a prime) is the quantity calculated from orbital elements.

A computed quantity is the quantity calculated from the observation.

A known observation is a sighting which has been identified by the sensor as a particular satellite.

An unknown observation (abbreviated UO) is a sighting which has not been identified by the sensor.

A verified observation is a known observation which may agree with the predicted position of the specified satellite.

An unverified observation is a known observation which does not agree with the predicted position of the specified satellite.

A tagged observation is an observation, either known or unknown, which does agree with the predicted position of one or more satellites.

An untagged observation is an observation, either known or unknown, which does not agree with the predicted position of any satellite.

The station tape is a binary magnetic tape containing station (sensor) coordinates for specified stations.

The residual of a quantity is the difference between the computed and predicted quantity.

2. 3 Input

Input data may be divided into four groups, some of which are optional. The four are: 1) the switch option card, 2) the element lead card and element sets, 3) the station lead card and station cards, and 4) observation lead card(s) and observations.

2. 3. 1 Switch Option Card

The switch option card sets the program switches. Setting of a switch is indicated by any non-zero numeric punch in the appropriate card column. The switches and their functions are indicated in Table 2. 2.

Table 2. 2
Program Switches and Their Functions

Switch Name	Card Column	Function, if Set
SS1	1	Inhibits the use of the station tape (if set, the station data must then be supplied as card input).
SS3	3	Inhibits the requirement for an interim tape and also eliminates any check of residuals vs. tolerances.
SS8	. 8	Causes all observations to be processed as unknowns, i.e., all are reduced against all available element sets. Known satellite numbers are retained for reference. Tolerance tests will be made unless SS3 is set.
SS9	9	Causes teletype formats to be used in preparation for the TELTYP Program.
SS10	10	Eliminates the rereduction, with open tolerance gates, of untagged observations.
SS11	11	Uses the perigee distance from the element set; if not set, perigee distance is computed.

2. 3. 2 Element Lead and Element Cards

The standard element sets required for reducing known observations, as well as the sets considered necessary in attempting to tag unknowns, must be included as a part of the input deck. The element cards must be preceded by the element lead card, identified by having only a seven (7) punch in card column 8. At present, no more than 250 element sets are permitted. Reading of the elements is terminated by either a station or an observation lead card.

2. 3. 3 Station Lead and Station Cards

To reduce observations, the geographic coordinates of the observing station must be available. The coordinates may be read from the station tape (if program switch 1 is not set) and/or from standard station cards. Each group of station cards must be preceded by the station lead card, identified by having only an eight (8) punch in card column 8. At present, no more than 750 stations may be used.

2.3.4 Observation Lead and Observation Cards

The observational data, the primary input to the Reduction Program, must be in the standard observation format. Each group of observations must be preceded by an observation lead card, identified by the nine (9) punch in column 8. Column 7 of the lead card is also used to specify the tolerances to be used by the program, where applicable. Table 2.3 special the codes and their corresponding values. Lead cards to change the tolerances may precede observations anywhere in the observation card deck. There is no limit to the number of observations which may be processed, since they are processed individually.

A blank observation card will terminate the reading of the preceding group of observational data. A card with only a non-zero numeric punch in column 79 will terminate the program.

Table 2.3
Tolerance Codes and Corresponding Values

Code	Time (days)	Right Ascension (degrees)	Height (km)
Blank \			
0)	.002	20	200
1	1	5	500
2	.003	360	10000
3	.002	360	10000
4	.001	360	10000
5	.003	5	300
_6	. 05	2. 5	200

2. 4 Output

Reduction results may be obtained in the form of teletype paper tape and/or printed output, depending upon the setting of program switch SS9 (cf. Table 2.2). Headings are also a function of the teletype option. The output consists of the satellite inventory, output preliminary to the results, and the results themselves.

2. 4. 1 Satellite Inventory

The satellite inventory, a listing of the satellite and element numbers used, is written following the termination of the reading of element sets. It is identified by the heading SATELLITE INVENTORY FOLLOWS.

The satellite and element numbers are printed in groups, seven to the line, each group separated from the next by a slash

2. 4. 2 Output Preliminary to Reduction Results

The elements and tolerances in effect for the results which will follow appear in five lines, as follows:

- Line 1. The satellite number
 - Line 2: Epoch revolution number, epoch time; nodal period (days), its first and one half of its second derivative with respect to time; the semi-major axis, and eccentricity
 - Line 3. Right ascension of the ascending node, its first and one half of its second derivative with respect to time, nodal period (minutes), and inclination
 - Line 4. Blank
 - Line 5. The tolerances (time, right ascension of the ascending node, and height)

A summary of the five lines in symbolic notation follows:

Satellite No.

2.4.3 Results for Tagged or Known Observations

The output format and quantities calculated depend upon the teletype option and upon the type of observation. If teletype output is desired, all headings are omitted and the output is placed in two lines. However, the quantities contained in the two lines are identical with those which would have been printed in one line, had the teletype option not been selected. In the following subsections the description will apply to a case in which teletype output is not requested.

As noted above, the headings and quantities computed are a function of the observation type. Each heading is described below. The headings will be printed each time a different group of observation type is encountered; that is, each time the observation type requires the use of a different section of the program.

2. 4. 3. 1 Output Common to All Observation Types

The output from each of three portions of the Reduction Program begins with two common quantities, the identification, ID, and the epoch revolution, N. The identification is composed of two eight character words which may be symbolically represented by

SATYMMDD HHMMSSs.

where

SAT = satellite number

Y = last digit of the year

MM = month of the year

DD = day of the month

HH = hour of the day

MM = minutes of the day

SS = seconds of the day

ss = hundredths of seconds

If the teletype ending sentinel, \$, appears at the end of any line of output, the observation time precedes epoch by more than four days.

2. 4. 3. 2 <u>Dimensions of the Output Quantities</u>

Unless otherwise indicated the dimensions of the output quantities are in time in days, distance in kilometers, and angular measure in degrees.

2. 4. 3. 3 Output from the General Reduction Program

Following the epoch revolution number are the argument of latitude, U, of the satellite; computed time of nodal crossing, T SUB N; its residual, DELTA T; the latitude, PHI S, and longitude, L S, of the sub-satellite point; the computed right ascension of the ascending node, RA N; its residual, DEL RA; the computed satellite height, H(KM); its residual, DEL H; observation type, TYPE; element number, ELEM; and station number, STA. If the observation type is visual, VIS, or Baker-Nunn, B-N, the height residual will appear as 0-0. If the type is radar, RDR, the computed quantity will be printed.

2. 4. 3. 4 Output from the Doppler Reduction Program

Following the epoch revolution number are the computed time of nodal crossing, T SUB N; its residual, DELTA T; the great circle distance, D, in nautical miles from the station to the subsatellite point; the elevation angle, H; the slant range, S; the

element number, ELEM; and the station number, SAT. The title (DOPPLER) is appended to the heading, or in case the teletype option is selected, the symbol, DOP, follows the station number.

2. 4. 3. 5 Output from the Direction Finder Program

Following the epoch revolution number are the computed time of nodal crossing, T SUB N; its residual, DELTA T; the slant range, S; the computed satellite height, H(KM); the element number, ELEM; and the station number, STA. The comment (DIR FINDER) is appended to the heading, or in case the teletype option is selected, the symbol DF follows the station number.

2.4.3.6 Observation Comments

The observation comments which may appear in the printed output and their explanations are given below. Each observation comment is preceded by the 16-digit observation identification.

Observation comments (1)-(3) may be printed for both known and unknown observations.

- (1) UNDEFINED OBSERVATION (2). Illegal equipment type specified.
- (2) NO STORED COORDINATES (2). The station coordinates of the observing station are not available.
- (3) IMPROPERLY LOGGED. An error exists in the observation, e.g., hours greater than 24, an elevation angle greater than 90 degrees, etc.

Observation comments (4)-(13) may be printed for known observations only. Each message is followed by the station number.

(4) NO ELEMENTS IN SYSTEM (1). The elements corresponding to the satellite designated in the observation have not been read.

- (5) QPRIME LESS THAN OR EQUAL TO ONE (1). The computed perigee distance is less than or equal to one earth radius.
- (6) DID NOT MEET RESIDUAL TOLERANCES (3). The observation did not meet the specified residual tolerances.
- (7) BAKER-NUNN OBS W/+RA (5). An observation is encountered in the General Reduction Program with an equipment type that indicates Baker-Nunn, but the observation does not have the required minus overpunch in column 31 of the observation card. If the observation is unknown, it becomes an untagged UO.

If the observation is unknown, it becomes an untagged UO.

- (8) ELEVATION NEGATIVE (7). The elevation computed from the declination by the General Reduction Program is negative. If an unknown observation, it becomes an UNTAGGED UO.
- (9) PHI S GREATER THAN I (8). The computed sub-satellite latitude exceeds the inclination.
- (10) DF AZ NEGATIVE (6). A Direction Finder observation has a negative azimuth.
- (11) DF ELEVATION NEGATIVE (8). A Direction Finder observation has a negative computed elevation.
- (12) NON-CONVERGENT OBS (9). The computation of the satellite latitude does not converge within the specified number of iterations.
- (13) SLANT RANGE (ZERO) (0). An observation with a zero slant range has been encountered by the General Reduction Program radar portion. If the observation is unknown, it becomes an untagged UO.

(14) UNTAGGED UO. An unknown observation has been reduced against all the element sets and remains untagged within the specified tolerances. If input options specify, the observation will be written on the interim tape and rereduced with large tolerances.

2. 4. 3. 7 Miscellaneous Printed Output

The various comments which may appear in the printed matter and their explanations follow.

(1) PN MISSING SO PA USED FOR SAT XXX ELEM XXX

The nodal period at epoch is missing from the sixth card of a seven card set. The anomalistic period has been used in its place.

(2) SATELLITE XXXX CARD XXX OUT OF ORDER

An element card is not in correct sequence, or an extraneous card is contained in the element sets. The elements for the particular satellite will not be stored in computer memory, hence are unavailable.

(3) UNTAGGED UOS REDUCED W/O TOLERANCES

All observations which follow have previously appeared as untagged UO's, and have now been rereduced with large tolerances.

(4) END OF RUN ********

All observations have been reduced with a specified tolerance. Any results which follow have been reduced with different tolerances.

(5) UO S FOLLOW

All observations which follow on the page did not correspond to any satellite, the elements of which were successfully stored in computer memory.

(6) UNK ********

The next observation is an unknown. The message number is given. If the observation was a known observation which was treated as an unknown, the satellite number is also given.

2. 4. 3. 8 Flexowriter Output

The messages which may appear on the flexowriter, and their explanations follow.

(1) SATELLITE XXXX CARD XXX OUT OF ORDER

An element card is not in correct sequence, or an extraneous card is contained in the element sets. The elements for the particular satellite will not be stored in computer memory, hence are unavailable.

(2) MOUNT RIGHT STATION TAPE

The station tape is not available to the program. The program awaits the stop-go option.

(3) ILLEGAL LEAD CARD SKIPPED

An illegal lead card (cf. Sec. 2.3) is present in the input deck. The program continues according to the last valid lead card.

(4) MOUNT STATION TAPE ON 7

The program is ready to run, but a stop-go option is provided in case the station tape is required.

(5) REMOVE STATION TAPE U7

The program run is complete, but a stop-go option is provided to give time to remove the station tape.

2.5 Processing

The program accomplishes its function of reducing observational data to the last nodal crossing, one observation at a time. However, certain preliminary operations must be performed prior to operating on the first observation, and as circumstances require, prior to operating on subsequent observations.

2.5.1 Preliminary Operations

The preliminary operations are initialization of various program switches, examination of switch options, reading of station coordinates from the station tape, reading of satellite elements from cards, reading of station data from cards, and the reading of the first observation lead card.

2. 5. 1. 1 Initialization of Program Switches

Certain switches which will control the path of the program are initialized to neutral settings.

2.5.1.2 Reading of Switch Option

The several program switch settings are read from the switch option card (cf. Sec. 2.3.1). These settings determine, among other things, whether or not the station tape is to be read and the interim tape rewound.

2.5.1.3 Reading the Station Tape

If switch SS1 is set the station tape is examined; and if it is identified as the station tape, the values of station number, latitude, longitude, and height are read into the appropriate array. If the identification test fails, a STOP-GO option is provided to allow the computer operator to mount the correct tape. GO causes the program to examine the newly mounted tape for the proper identification. STOP causes the program to return control to the executive routine.

2. 5. 1. 4 Reading the Element Sets

The element sets are generally read as a single group by the subroutine ELRED. The program logic also permits their being read in separate groups, providing they are identified by an element lead card. Certain validity checks are made upon each element set. If no gross errors exist, the elements are stored in the element array for future use. If errors do exist, appropriate error messages are generated and the element set is otherwise ignored.

Reading of element sets is terminated by either a station lead card or an observation lead card. Termination of reading causes the satellite inventory, a listing of those satellites whose elements were successfully read, to be generated as the first output of the program.

2.5.1.5 Reading of Station Data from Cards

If a station lead card is encountered during the running of the program, the data from the station card or cards which follow the lead card are stored in the station data array. Reading of the station cards is terminated by either an element lead card or an observation lead card.

2.5.1.6 Reading of an Observation Lead Card

Each observation or group of observations must be preceded by an observation lead card, which also specifies the tolerances to be used, where applicable, to cause the tagging of unknown observations. Table 2.3 specifies the codes used in card column 8 of the lead card and the corresponding values of the tolerances. Following the reading of the first observation lead card the processing of observations can begin.

2.5.2 Preliminary Processing for all Observations

The observations are read and processed individually. Prior to the actual reduction calculations, tests are made for the validity of the observation, the station coordinates are retrieved, the appropriate elements are located and the observation type determined.

2. 5. 2. 1 Testing of the Observation

Certain fields from the observation card are checked for validity. These fields are month, day, hour, minute, second, elevation angle, and azimuth angle. An error in any one of the fields will cause the rejection of the observation with the appropriate comment (cf. Sec. 2.4.2.6(3)). The program proceeds to read another observation card.

2. 5. 2. 2 Retrieval of Station Coordinates

If the several fields of the observation card contain no illegal values, the station number from the observation is compared to that from the previous observation. If the two numbers do not agree, the station data array is searched for the current station number. If the station number is found, the station latitude, longitude, and height are retrieved, and station dependent quantities are computed. If the current station number is not found in the station data array, the observation will be rejected with the appropriate comment (cf. Sec. 2.4.3.6 (2)). The program proceeds to read another observation.

If the two station numbers do agree, the latitude and longitude are examined for zero which would indicate that the station coordinates were not previously found. The observation is then rejected with the appropriate comment.

2.5.2.3 Retrieval of Satellite Elements

If the observation is a known observation, the satellite number is compared to that of the previous satellite. If they agree, then the elements have already been retrieved and no search of the element array is necessary. If the satellite number is not the same as that of the previous satellite, the element array is searched via subroutine ELCAL3. If the search is successful the nodal elements

are printed (cf. Sec. 2.4.2). If the elements are not found the observation is rejected with the appropriate comment (cf. Sec. 2.4.3.6 (4)). The program proceeds to read another observation.

If the observation is an unknown observation, then the subroutine ELCAL3 will sequentially retrieve the elements from the element array until the observation has been reduced against all elements.

Subsequent to the retrieval of the elements, perigee distance for the revolution at the time of the observation is computed. If perigee distance is less than one earth radius, computations will either cease in the case of a known observation, or continue with the next element set for an unknown observation. The appropriate comment (cf. Sec. 2.4.3.6 (5)) is printed for the known observation, and another observation is read.

If the perigee distance computation is satisfactory, the actual reduction computation is ready to be made on the basis of the observation type.

2.5.2.4 Determination of Observation Type

The observation type, a part of the observation itself, is used to determine which of the three subsections of the program is to be used for the reduction computations. An illegal observation type will cause the rejection of the observation with the appropriate comment (cf. Sec. 2.4.3.6 (1)).

2.5.3 Processing With the General Sighting Routine

The General Sighting program processes only observations in which azimuth and elevation angles, or right ascension and declination are given. Slant range may also be utilized. The general observation types which fulfill this requirement are visual, radar and Baker-Nunn camera observations.

2.5.3.1 Special Processing of Visual Observations

Visual observations may be either azimuth and elevation angles or right ascension and declination. If the right ascension and declination are given, they are converted to azimuth and elevation angles. A negative elevation angle computed from a known observation causes an error message (cf. Sec. 2.4.3.6 (8)) to be generated and the program proceeds to process the next observation. If the observation is unknown, it becomes an untagged UO. Computation of a positive elevation angle causes processing to continue as indicated in Sec. 2.5.3.3.

2.5.3.12 Special Processing of Baker-Nunn Camera Observations

Baker-Nunn camera observations must have right ascension and declination given. These are converted to azimuth and elevation angles and the processing continues as indicated in Sec. 2.5.3.3. If the overpunch signifying right ascension and declination is missing, an error message (cf. Sec. 2.4.3.6 (7)) is generated for a known observation or the unknown observation is made an untagged UO. In either case, the program proceeds to the next observation.

2.5.3.3 Common Processing of Visual and Baker-Nunn Camera Observations

Neither visual nor Baker-Nunn camera observations have any range information. For this reason an iterative procedure is used to determine the sub-satellite position. The station's latitude and sidereal time are taken as first approximations to the satellite's latitude and right ascension, respectively, on the assumption that the satellite is close to the station. Failure of the calculations to converge causes an error message (cf. Sec. 2.4.3.6 (12)) to be generated for known observations. The program proceeds to the next observation for the known observation or to the next element set for an unknown observation. If the iteration produces the

satellite latitude within the specified limit, the latitude is checked against the inclination angle. An unsatisfactory result causes an error message (cf. Sec. 2.4.3.6 (9)) to be generated for a known observation and the program proceeds to the next observation. For an unknown observation the next element set is selected.

If the computed latitude can be on the orbital plane, processing continues as indicated in Sec. 2.5.3.5.

2.5.3.4 Special Processing of Radar Observations

The examination of the azimuth and elevation angle field for a radar observation is identical to that described for a visual observation (cf. Sec. 2.5.3.1). However, radar observations include a range measurement, and this is used to determine the subsatellite position. An illegal range, i.e., negative, causes the appropriate message (cf. Sec. 2.4.3.6 (13)) to be generated for a known observation, and causes an unknown observation to become an untagged UO. In either case, the program proceeds to process the next observation.

If the range is valid, the satellite's latitude and right ascension are computed. The latitude is compared with the inclination angle. If the test is satisfactory, the height residual is computed. Processing then continues as in Sec. 2.5.3.5. If not an error message (cf. Sec. 2.4.3.6 (9)) is generated for a known observation, and the program proceeds to process the next observation. If the observation is unknown, the program proceeds to the next element set.

2.5.3.5 Common Processing of all General Sighting Observations

The longitude of the satellite, right ascension of the node, the residuals of time and right ascension of the node are computed for all general sighting observations. At this point the observation has passed the various gross tests and the residuals, be they large or small, have been computed. The setting of switch option SS3 determines whether or not the residuals for an unknown observation should be compared with the tolerances. If the switch is not set and the observation is unknown, the comparison is made. Failing the comparison causes the program to select the next element set; passing causes the observation to be tagged. If the switch SS3 is set, the tolerances are ignored. The observation and the reduction results are then output for printing. The program proceeds to process the next observation on the same observation with a new element set, depending upon whether or not the current observation is known or unknown.

2.5.4 Processing With the Doppler Routine

The Doppler portion of the program processes passive track Doppler observations and Fence observations in which range rate is the only information available. Consequently, only the time residual is computed.

Preliminary calculations concerning the relative position of the ascending node and the station are made to determine certain constants for subsequent calculations. The argument of latitude, true anomaly, eccentric anomaly, and mean anomaly of the satellite are intermediate quantities used in determining the time residual, the elevation angle and the slant range. The setting of switch SS3 determines whether or not the time residual for an unknown observation should be compared with the time tolerance.

2. 5. 5 Processing With the Direction Finder Routine

The Direction Finder portion of the program processes observations in which the azimuth angle of the closest approach is given. For this reason only the time residual is computed.

The observation will be rejected with the appropriate message (cf. Sec. 2. 4. 3. 6 (11)) if the azimuth is negative. If it is positive the time residual, the elevation angle and the slant range are computed. A negative elevation angle will cause an error message (cf. Sec. 2. 4. 3. 6 (10)) to be generated for a known observation. The program proceeds to the next observation or the next element set depending upon whether the negative elevation angle was computed from a known or an unknown observation.

If the elevation angle is positive, the setting of switch SS3 determines whether or not the time residual for an unknown observation should be compared with the time tolerance. If the comparison is made and the residual exceeds the tolerance, the program proceeds to select the next element set. Otherwise the observation is tagged and the reduction results for both the tagged unknown or known observation are output for printing. The program proceeds to process the next observation or the same observation with a new element set depending upon whether or not the current observation is known or unknown.

2. 5. 6 Optional Reprocessing of Untagged Unknowns

Unknown observations which have failed to be tagged may be reprocessed with large tolerances, depending upon the setting of switches SS3 or SS10. If neither are set, unknown observations which have not been tagged are written on the interim tape following the processing with the last available element set.

After all observations have been initially processed, the tolerances are set to large values. The observations are then read from the interim tape, one at a time, and reprocessed with all element sets.

C

General Sighting Reduction Program

Input:

Orbital elements at epoch:

To	time of node	N	epoch revolution
P	nodal period in days/rev.	ω	argument of perigee
С	rate of change of period	·ω	rate of change of ω
ď	rate of change of c	ώ	rate of change of $\dot{\omega}$
Ω	right ascension of ascending	q	perigee distance
•	node	• q	rate of change of q
Ω .	rate of change of Ω	ä	rate of change of q
Ω_{\perp}	rate of change of Ω	T'	epoch of decay
i ·	inclination of orbital plane	• •	equation
	eccentricity		

Sighting data:

ф	Latitude of station		
λ	Longitude of station west		
Н	height	of station	
t _i	time o	f observation	
either	α	right ascension	
٠.	. δ	declination	
or	Az	azimuth	
	h	elevation	

2.6.1 Formulation for the General Sighting Reduction Program

1)
$$\Delta t = t_i - T_0$$

2)
$$RA' = RA + R\dot{A} \Delta t + \frac{1}{2} \ddot{R}A (\Delta t)^{2}$$

 $\omega' = \omega + \dot{\omega} \Delta t + \frac{1}{2} \ddot{\omega} (\Delta t)^{2}$

3)
$$P_a = 360^{\circ} P/(360^{\circ} - \dot{\omega} P)$$

4)
$$a = (P_a /.058672947)^{2/3}$$

5)
$$P'_a = P_a + P \Delta t + 1/2 P (\Delta t)^2$$

6)
$$a' = (P'_a /.058672947)^{2/3}$$

7) If q not given:
$$q' = a(1-e)$$
, Go to 8

$$q' = q + \dot{q} \Delta t' + 1/2 \dot{q} (\Delta t)^2$$

8) If
$$q' = 1$$
: stop
If $q' > 1$: $e' = (a' - q)/a'$

9) If
$$e' < 0 : 0 \rightarrow e'$$

10)
$$e'' = \sqrt{\frac{1 - e'}{1 + e'}}$$

11)
$$\theta_z = [\theta_0 + .98565 \text{ (Day of Year of Obs)} + 360.98565 \text{ (Fract. of day)} + \lambda], $0 \le \theta_z < 360$$$

12) If a given convert a from hours to degrees

Q

2.6.2 The following Equations are for Baker-Nunn and Visual portions only. Radar is listed separately

13) If this is a Baker Nunn observation: Go to 14

If not: Go to 20

14) If
$$\delta < -23^{\circ}$$
 If $\delta > -23^{\circ}$

$$a_{obn} = .53123888^{o} - a$$
 $a_{obn} = .65918611^{o} - a$

$$Z_{bn} = .53138889^{\circ}$$
 $Z_{bn} = .65941945^{\circ}$

$$\theta_{\rm bn} = .46215278^{\circ}$$
 $\theta_{\rm bn} = .57353333^{\circ}$

15)
$$\rho = \sin \theta_{bn} (\tan \theta + \tan \frac{\theta_{bn}}{2} \cos a_{obn})$$

16)
$$a_{bn} - a_{obn} = tan^{-1} (\rho \sin a_{obn} / (1 - \rho \cos a_{obn}))$$

17)
$$\alpha = -(a_{bn} + Z_{bn})$$

18)
$$\gamma = \cos ((a_{bn} + a_{obn})/2) \cdot \tan (\theta_{bn}/2) \sec ((a_{bn} - a_{obn})/2)$$

19)
$$\delta = 2 \tan^{-1}(\gamma) + \delta$$

20) If a given: Go to 21

If not: Go to 25

21)
$$H' = \theta + \alpha$$
 ("a" as in input)

22)
$$h = \sin^{-1} (\sin \phi \sin \delta + \cos \phi \cos \delta \cos H')$$

If $h < 0$, Return for next obs.

23)
$$\sin(Az) = -\cos\delta \sin H'/\cos h$$

24)
$$\cos (\mathbf{A}z) = (\sin \delta - \sin \phi \sin h)/\cos \phi \cos h$$

25)
$$\phi' = \tan^{-1}(.99329985 \tan \phi)$$

26)
$$RA_{s} = \theta$$
$$\phi'_{j} = \phi'$$

27)
$$R_0 = .9966443/[1 - .00670015 \cos^2 \phi_j]^{1/2} + H/6378.174$$

28) If
$$\phi'_{j} \ge i$$
: $u = 90^{\circ}$ (X sign of ϕ'_{j}), Go to 31
If $\phi'_{j} < i$: Go to 29
1-2-22

29)
$$u' = \sin^{-1} (\sin \phi_{i}' / \sin i)$$

30) If
$$\cos (RA_s - RA') < 0$$
: $u = 180 - u'$
If $\cos (RA_s - RA') \ge 0$: $u = u'$

31)
$$v = u - \omega'$$

32)
$$r = a'(1 - e'^2)/(1 + e'\cos v)$$

33)
$$H'' = r - R_0$$

34)
$$a = 90 - \sin^{-1}(\cos h/(1 + H')) - h$$

35)
$$\phi'_{j+1} = \sin^{-1}(\cos \alpha \sin \phi + \sin \alpha \cos \phi \cos Az)$$

36)
$$\Delta L = \sin^{-1} (\sin \alpha \sin Az/\cos \phi'_{j+1})$$

37)
$$RA_s = (\theta + \Delta L), \quad 0 \leq RA_s \leq 360$$

If
$$(\left|\phi_{j+1}' - \phi_{j}'\right| - 10^{-4}) < 0$$
: Go to 39

If ≥ 0 , $j+1 \rightarrow j$: Go to 27 unless observation does not converge within the specified number of iterations. In this case, return for next observation.

39) If
$$\phi_{j+1} \ge i$$
: Return for next observation If not, $\phi_{j+1} \rightarrow \phi_s$: Go to 40

40)
$$L_s = (\lambda + \Delta L), 0 \le L_s \le 360$$

41) If
$$i = 90^{\circ}$$
, $\Delta \lambda' = 0$: Go to 43

42)
$$\Delta \lambda' = (\sin^{-1}(\tan \phi_s/\tan i))$$

43) If
$$\cos u < 0$$
: $\Delta \lambda = \Delta \lambda' - \pi$
If $\cos u \ge 0$: $\Delta \lambda = -\Delta \lambda'$

44)
$$RA_N = (RA_s + \Delta \lambda), 0 \leq RA_N \leq 360$$

REDUCT

45)
$$E_s = 2 \tan^{-1} (e'' \tan v/2)$$

46)
$$E_{RA} = -2 \tan^{-1} (e'' \tan (\omega/2))$$

47)
$$M_s = E_s - e' \sin E_s$$

48)
$$M_{RA} = E_{RA} - e' \sin E_{RA}$$

49)
$$T_n = t_i - ((M_s - M_{RA})/360) P_a', 0 \le (M_s - M_{RA}) \le 360$$

50)
$$\Delta N = (T_n - T_0)/P_a'$$
 (the integral portion thereof)

51)
$$T_x = T_0 + P \Delta N + c (\Delta N)^2 + d (\Delta N)^3$$

52) If
$$|T_x - T_n| < P/2$$
: Go to 53

If not, then when: $(T_x - T_n) > 0$, set $\Delta N = \Delta N - 1$, Go to 53

 $(T_x - T_n) = 0$, Go to 53

 $(T_x - T_n) < 0$, set $\Delta N = \Delta N + 1$, Go to 53

53)
$$RA_x = RA + \dot{R}A (T_x - T_0) + \frac{1}{2} \dot{R}A (T_x - T_0)^2$$

54)
$$\Delta T_n = T_n - T_x$$

 $\Delta RA = RA_n - R_x$

Output:

N,
$$u^0$$
, T_n , ΔT_n , ϕ_s , L_s^0 , RA_n^0 , ΔRA_n^0 , H'' , Km

2.6.3 Radar Portion of General Sighting Reduction Program

Input:

Same as for other portions of General Sighting Reduction Program with exception that ρ (slant range) is included as part of sighting data.

Equations:

20)
$$R_0 = [.996643/(1 - .00670015 \cos^2 \phi_i)]^{1/2} + H/6378.174$$

21)
$$R'' = \left[R_o^2 + (\rho/6378.174)^2 + 2 R_o (\rho/6378.174) \sin h \right]^{1/2}$$

22)
$$a = \sin^{-1}(\rho \cos h/6378.174 R'')$$

23) If
$$\alpha < 0$$
: Return for next observation

If $\alpha \ge 0$: Go to 24

24)
$$\dot{\phi}_s = \sin^{-1} (\sin \phi \cos \alpha + \cos \phi \sin a \cos Az)$$

25)
$$\Delta L = \sin^{-1} (\sin \alpha \sin Az/\cos \phi_s)$$

$$\cos \Delta L = (\cos \alpha - \sin \phi' \sin \phi'_s / \cos \phi' \cos \phi'_s)$$
If $\cos \Delta L < 0$: $\Delta L = 180 - \Delta L$: Go to 26

If $\cos \Delta L \ge 0$: Go to 26

26)
$$RA_s = (\theta + \Delta L), 0 \le RA_s \le 360$$

27) If
$$\phi_s > i$$
: Return for next observation

If not: Go to 28

28)
$$u' = \sin^{-1} (\sin \phi_s / \sin i)$$

C

29) If
$$\cos (RA_s - RA') < 0$$
: $u = 180 - u'$
If $\cos (RA_s - RA') > 0$: $u = u'$

30)
$$v = u - \omega'$$

31)
$$r = [a'(1 - e'^2)/(1 + e'\cos v)] 6378.174$$

Output:

Same as in other G.S.R.P. except that R", observed height, is included.

2. 6. 4 Direction Finder Reduction Program

Input:

Same as for General Sighting Reduction Program except that elevation - declination is not given.

Equations:

12)
$$\lambda_{n} = \theta - R'$$

13)
$$\Delta \lambda = \lambda_n + \lambda$$

14)
$$(u + \Delta u) = \tan^{-1} (\tan \Delta \lambda / \cos i)$$

15) If
$$\cos \Delta \lambda \geq 0$$
: Go to 17

If $\cos \Delta \lambda < 0$: Go to 16

16) If
$$(u + \Delta u) \ge 0$$
: $(u + \Delta u) = (u + \Delta u) - 180$

If
$$(u + \Delta u) < 0$$
: $(u + \Delta u) = (u + \Delta u) + 180$

17)
$$\phi'_{\lambda} = \sin^{-1} (\sin (u + \Delta u) \sin i)$$

18)
$$\phi' = \tan^{-1}(.99329985 \tan \phi)$$

19)
$$\Delta \phi' = \phi_{\lambda}' - \phi'$$

20) If
$$Az < 0$$
: Return for next observation

If
$$Az \ge 0$$
: Go to 21

21) If
$$Az - 180 < 0$$
: $Az_i = Az$

If
$$Az - 180 \ge 0$$
: $Az_i = Az - 180$

22) If
$$Az'_{i} - 10^{-5} < 0$$
: Go to 24
If $Az'_{i} - 10^{-5} \ge 0$: Go to 23

C

23) If
$$|\Delta\phi'| - 10^{-5} < 0$$
: Go to 24
If $|\Delta\phi'| - 10^{-5} \ge 0$: Go to 25

24)
$$u = u + \Delta u$$
: Go to 35

25)
$$\sin \eta = \sin \Delta \lambda / \sin (u + \Delta u)$$

26)
$$\cos \eta = \tan \phi_{\lambda} / \tan (u + \Delta u)$$

27)
$$\cot \Delta u = (\cos \eta / \tan \Delta \phi') - ((\sin \eta / (\sin \Delta \phi' \tan Az_i'))$$

28)
$$\Delta u = \tan^{-1} (1/\cot \Delta u)$$

29) If
$$\Delta u < 0$$
: Go to 30

If $\Delta u = 0$: Go to 34

If $\Delta u > 0$: Go to 32

30) If
$$\Delta u + 90 < 0$$
: Go to 31

If $\Delta u \ge 0$: Go to 34

31)
$$\Delta u = \Delta u + 180$$
: Go to 34

32) If
$$90 - \Delta u < 0$$
: Go to 33

If 90 - $\Delta u \ge 0$: Go to 34

$$\Delta u = \Delta u - 180$$

34)
$$u = (u + \Delta u) - \Delta u$$

$$v = u - \omega'$$

$$\Delta T_n = T_n - T_x$$

45)
$$\sin \phi'_{s} = \sin u \sin i$$

46)
$$R = [.9966443/(1 - .00670015 \cos^2 \phi_B']^{1/2} + H/6378.174$$

47)
$$r = a' (1 - e'^2)/(1 + e' \cos v)$$

48)
$$H'' = (r - R) 6378.174$$

49)
$$R_o = [.9966443/(1 - .00670015 \cos^2 \phi_s')]^{1/2}$$

53)
$$\lambda_{i} = \lambda_{n} + \Delta \lambda$$

54)
$$\Delta \lambda_{o} = -\lambda - \lambda_{i}$$

55)
$$\cos L_{o} = \sin \phi'_{s} \sin \phi' + \cos \phi'_{s} \cos \phi' \cos \Delta \lambda_{o}$$

56)
$$\tanh = r \cos L_0 - R_0 / r \sin L_0$$

57) If
$$h < 0$$
: Return for next observation
If $h \ge 0$: Go to 57

58)
$$\rho = (R_0^2 + r^2 - 2 R_0 r \cos L_0)^{1/2} 6378.174$$

Output:

N, T_N , Δt_n , ρ , H, h.

2.6.5 Doppler Reduction Program

Input:

Same as General Sighting Reduction Program except that elevation - declination and azimuth-right ascension are not given.

Equations:

12)
$$\lambda_n = [RA' - \theta_G], 0 \le \lambda_n \le 360$$

13)
$$\Delta \alpha = \lambda_n - \lambda \qquad \Delta \alpha = \lambda_n - \lambda$$

14) If
$$\Delta a < 0$$
: Go to 15

If $\Delta \alpha > 0$: Go to 17

If $\Delta \alpha = 0$: Go to 19

15) If
$$(\Delta a + 240) < 0$$
: Go to 16

If
$$(\Delta a + 240) \ge 0$$
: Go to 19

16)
$$\Delta \alpha = \Delta \alpha + 360$$
: Go to 19

17) If
$$(\Delta \alpha - 180) > 0$$
: Go to 18

If
$$(\Delta a - 180) \le 0$$
: Go to 19

18)
$$\Delta \alpha = \Delta \alpha - 360$$

19)
$$\Delta \alpha_1 = \lambda_n - \lambda + 180$$

20) If
$$\Delta a_1 > 0$$
: Go to 21

If $\Delta a_1 \leq 0$: Go to 22

21)
$$\Delta \alpha_1 = \Delta \alpha_1, \quad 0 \leq \Delta \alpha_1 \leq 360$$

22) If
$$(\Delta a_1 - 180) \ge 0$$
: Go to 23
If $(\Delta a_1 - 180) < 0$: Go to 24

$$\Delta a_1 = \Delta a_1 - 360$$

24) If
$$\phi \geq 0$$
: Go to 25

If ϕ < 0: Go to 27

25) If
$$(\Delta \alpha + 180) \ge 0$$
: Go to 30
If $(\Delta \alpha + 180) < 0$: Go to 26

26)
$$\Delta \alpha = \Delta \alpha_1$$
: Go to 31

27) If
$$\Delta \alpha_1 \geq 0$$
: Go to 28 If $\Delta \alpha_1 < 0$: Go to 29

28) If
$$(\Delta a_1 - 90) \ge 0$$
: Go to 29
If $(\Delta a_1 - 90) < 0$: Go to 31

$$\Delta\alpha = \Delta\alpha_1$$

30)
$$C_{13} = 1$$
 $C_{15} = 1$, Go to 32

31).
$$C_{13} = -1$$

$$C_{15} = -1$$

32)
$$\cos c = \cos |\phi| \cos |\Delta \alpha|$$

33)
$$\sin c = (1 - \cos^2 c)^{1/2}$$

$$\beta = \sin^{-1} \frac{\sin |\phi|}{\sin c}$$

35) If
$$C_{15} \ge 0$$
: Go to 36

If $C_{15} < 0$: Go to 37

36) If
$$\Delta \alpha \geq 0$$
: Go to 37

If $\Delta a < 0$: Go to 38

37)
$$\gamma = 180 - \beta - i$$
, Go to 39

38)
$$\gamma = |\beta - i|$$

(i

39)
$$d = \sin^{-1}[(\sin c)(\sin \gamma)]$$

40)
$$u' = \cos^{-1} \left| \frac{\cos c}{\cos d} \right|$$

41) If
$$\cos c < 0$$
: Go to 42

If $\cos c \ge 0$: Go to 43

42)
$$u' = 180 - u'$$

43) If
$$\phi \ge 0$$
: Go to 44

If ϕ < 0: Go to 46

44) If
$$(u'C_{13}) \ge 0$$
: Go to 45

If $(u'C_{13}) < 0$: Go to 46

45)
$$u = u'$$
, Go to 51

46)
$$u = 180 - |u'|$$
: Go to 51

47)
$$u'' = u' + 180$$

48) If
$$(u'' \cdot C_{13}) \ge 0$$
: Go to 49

If $(u'' \cdot C_{13}) < 0$: Go to 50

49)
$$u = u''$$
 Go to 51

50)
$$u = 360 - |u'|$$

51)
$$\mathbf{v} = \mathbf{u} - \boldsymbol{\omega}'$$

$$\Delta T_n = T_n - T_x$$

61)
$$\phi' = \tan^{-1} (.99329985 \tan \phi)$$

62)
$$R_0 = .9966443/[1 - .00670015 \cos^2 \phi']^{1/2} + H/6378.174$$

63)
$$r = a'(1 - e'^2)/(1 + e' \cos v)$$

64)
$$h = \tan^{-1} [(r \cos d - R)/r \sin d]$$

65) If
$$(h-90) = 0$$
: Go to 66

If $(h-90) \neq 0$: Go to 67

66)
$$\rho = r - R$$
, Go to 68

67)
$$\rho = 6378.174 \cdot r \cdot \sin d/\cos h$$

68)
$$d = 60 d$$

Output:

N,
$$T_n$$
, ΔT_n , d, h, ρ

2.7	Glossary		
	Location	Symbol	Meaning
	A	a	Semi-major axis
	AA1		Column 1 overpunch from observation card
	AA2		Column 25 overpunch from observation card
	AA3		Column 31 overpunch from observation card
	ALPHA	a*	Angle used in intermediate comp. (see Fig. 2. 1)
	APRIME	a'	Predicted semi-major axis
	BNA	αBN	Baker-Nunn section; right ascension of sat.
	BNAO	^a OBN	Baker-Nunn section; equinox constant
	BNGAM	$\gamma_{\mathbf{B}\mathbf{N}}$	Baker-Nunn section; angle gamma
	BNTH	$\theta_{ exttt{BN}}$	Baker-Nunn section; equinox constant
	BNZ	z_{BN}	Baker-Nunn section; equinox constant
	C13, C15	C ₁₃ , C ₁₅	Doppler section; quadrant conversion constants
	C2PI	2 π	Constant = 6.28318531
	С	c	Rate of change of period (days/rev. 2)
	CLR	ρ	Slant range in earth radii
	COSET		Cosine of η , (See Fig. 2.2)
	COSHD		Cosine of elevation
	COSI		Cosine of inclination angle
	COSP, COSPR		Cosine of geocentric latitude of the station
	COSZ		Cosine of azimuth angle
	COTU		DF section; cotangent of Δ μ
	D	d	First derivative of rate of change of period
	DA		Control section; day of observation
	DA		Doppler section; predicted longitude difference between station and nodal crossing
	DA1	Δa_1	Doppler section; $\Delta \alpha + \pi$
	DAY		Observation time in days of year
	DB	β	Doppler section; intermediate angle (See Fig. 2.1)
	DD	ď	Doppler section; arc distance from station to subsatellite point
	DEG		Conversion constant, radians to degrees
	DELL	Δλ	Longitude difference between station and sub- satellite point

DELN	ΔΝ	Difference between epoch revolution and the revolution of the observation
DELRA	ΔRA	Computed minus predicted satellite right ascension
DELT	Δt_n	Time difference between observation and epoch times.
DELTAT	Δt	Time residual (observed minus predicted time of nodal crossing)
DELTN	Δt_n	Time difference between observation and the preceding ascending node
DF		Direction finder
DFL	Δλ	DF section; right ascension difference between station and ascending node
DG	γ	Doppler section; angle gamma
DH	$\Delta H_{\mathbf{t}_{.}}$	Height tolerance in kilometers
DI .	i	Inclination angle
DLW	λ'_{N}	Doppler section; predicted longitude of ascending node
DRA	ΔRA_t	Right ascension tolerance limit in degrees
DT	$\Delta \mathbf{t_t}$	Time tolerance limit in days
DTCMP	$T_{\mathbf{N}}$	Predicted time of nodal passage
DU .	μ	Doppler section; computed argument of latitude of satellite
E	e	Eccentricity
ELEM		Element number
ELEMR, ELEM	· w	Arrays used to store element sets
ELS	$\mathtt{L}_{\mathbf{s}}$	Longitude of subsatellite point
EMRA	M _N	Mean anomaly, node related
EMS	Ms	Mean anomaly, satellite related
EN	Nobs .	Revolution number at observation time
EPRIME	e ′	Predicted eccentricity at time of observation
ERA	${ t E}_{ t N}$	Eccentric anomaly of ascending node
ERAD		Intermediate quantity, 1-e 1+e
ES	$\mathbf{E}_{\mathbf{s}}$	Eccentric anomaly of satellite
FORDE	•	Contents of col. 80 of element card
FRACT		Fractional day portion of observation time

GI	i	Inclination angle
GIVEN	N	Epoch revolution number
GL	λ _s	Station longitude
Н	H	Station height
HDEC	δorh	Declination or elevation angle from observation
HLS	ρ	Slant range
HM		Minute of observation
НО	h	Doppler section: elevation angle
HPPRI	H''	Height of satellite above earth's
HPRIME	HA	Hour angle
HR		Hour of observation
HS		DF section: object height
IELR		Array of satellite and element numbers
IEYEl		Obs ID (satellite number and last digit of year of observation)
IEYE2	•	Obs ID (hour and minute of observation time)
IFLAG1		Switch: 1 = known observation 2 = unknown observation
IFLAG2		Switch: 1 = elements found 2 = elements not found
IIEYE1		Obs ID, (month and day of observation time)
IIEYE2		Obs ID, (seconds of obs x100)
IIPEYE1		Same as IIEYEl
IPEYEl	.	Same as IEYE1
IS	•	Input card number or card type
ITAG		Tag switch: 1 = UO tagged 0 = UO not tagged
·ITCH		Switch set for type of General Reduction: negative for Baker-Nunn; zero for visual, positive for radar
ITERK		Upper limit of number of iterations for convergence in computing geocentric latitude of the satellite
ITL		Tolerance switch: determined by observation lead time
ITY		Equipment type used by observing station
IYR		Year of observation
JB		Switch set to 1 for unknown obs., which indicates that residuals are to be tested against tolerance limits; otherwise set to 0

	JCLS		Switch 1 = classified observation 0 = unclassified observation
	JJ		Number of stations read from station tape
	JTl		Input tape
	J T2		Output tape
	К		Switch indicating which section of program to process obs: 2 = General 3 = Doppler 4 = Direction Finder
	KAT		Satellite number
	KEL		Number of element sets read
•	KSTA		Station number
	KTAP		Switch normally set to 1. Set to 2 when all UOs written on interim tape
	KUFO		UO switch: -1 = known observation 0 = compute vector (General Radar) 1 = vector previously computed 2 = initial setting
	LEM		Element number
_	LEND		Card type
	M		Satellite number from observation card
•	MLAST		Previous satellite number
	MO		Month of observation
	MOUT		Output indicator for type of General Reduction used
	MSG		Observation message number
	MT		Heading switch: 2 = no heading necessary for General 3 = No heading necessary for Doppler 6 = No heading necessary for DF
	N	N	Epoch revolution number
	NAT		Satellite number
	NDCT		Control section: Switch set negative when necessary to obtain new obs from input tape
	NOUT		Set to \$ when time of obs. precedes epoch by more than four days
	NSTA		Station number from observation card
	NUFO	•	Previous obs. unknown switch. If previous observation was unknown this switch is set to non-zero

PA	Pa	Anomalistic period in days per revolution
PAPRI	P'_a	Predicted anomalistic period
PEYEM		Satellite number
PHI	$\phi_{f s}$	Geodetic latitude of station
PHIPJ, PHIPJ1	$\phi_{\mathbf{j}}^{\prime}$	Geocentric latitude of satellite
PHIPL	φ's	Geocentric latitude of station
PHIPR	φ΄	Geocentric latitude of station
PI	π	Constant = 3.14159265
PI2	$\pi/2$	Constant = 1.57079633
PM	$P_{N_{\mathbf{m}}}$	Nodal period at epoch in minutes per revolution
PN	$P_{\mathbf{N}}$	Nodal period at epoch in days per revolution
Q	q	Perigee distance in earth radii
QDOT	• q	Rate of change of perigee distance (er/day)
QDDOT	q q	1/2 second derivate of perigee distance
RA	Ω	Right ascension of ascending node at epoch
RACOMP	ά΄	Predicted right ascension of ascending node
RAD		Conversion constant, radians to degrees
RAN	α	Right ascension of ascending node at observation time
RAS	a _s	Right ascension of subsatellite point
RDOT	Ω	Rate of change of RA
RDDOT	$\dot{\Omega}$	1/2 second derivative of RA
RO	R_{o}	Radius of earth at subsatellite point
ROP	r	Radius of earth at station
RPOLY	ά΄	Predicted RA at observation time
RPPRI	Δh	Difference between observed and predicted height
RS	R_s	Distance from center of earth to given subsatellite latitude
RSMALL	r	Radial distance of satellite from center of earth
SAT		Satellite number
SEC		Seconds of observation
SHS	h	DF section: elevation angle
SINAL		Sine of angle, d(see Fig. 2.1)

CINT		
SINET		DF section: sine η (see Fig. 2.2)
SINI		Sine of inclination angle
SINP, SINPR		Sine of geocentric latitude of station
SINZ		Sine of azimuth angle
SLR	ρ	Slant range
SO	ρ	Doppler section: slant range
SS1		Input switch to inhibit station tape
SS3		Input switch to eliminate tolerance limit tests and to inhibit the interim tape
SS8		Input switch to run all observations as unknowns
SS9		Input switch if teletype output desired
SS10		Input switch to eliminate re-reduction of untagged observations; inhibits interim tape
SS11		Input switch if q-term supplied
STAIN		Array of station coordinates read from station tape
STEL		Working array of station coordinates
TANI		Tangent of inclination angle
THETA	θ	Sidereal Time at station
TLHS		DF section: tangent of elevation angle
TMO		Month of observation
TNDF	T_N'	Predicted time of node
TOD	[t _o]	Integer portion of epoch time
TOF	$t_{ extsf{frac}}$	Fractional part of epoch time
TOT	to	Epoch time
U	μ	Argument of latitude of satellite in orbital plane
UDELU		DF section: μ + Δμ
UO		Unknown observation
v	\mathbf{v}	True Anomaly
w	ω	Argument of perigee
WDOT	ώ	First derivative of argument of perigee
WDDOT	ü	1/2 second derivative of argument of perigee
WPOLY	ω΄	Predicted argument of perigee
x	φs	Station latitude
XAT		Tens and units digits of satellite number

		Smithsonian day at enoch time
XDAY	t _{s.}	Smithsonian day at epoch time
XDEC		Five least significant columns of elevation angle or declination field
Y	λ _s	Station longitude
YDAY		Observation time in Smithsonian days
YR		Year of observation
YRA		Six least significant columns of azimuth angle or right ascension field
z	h _s	Station height
ZPRI	Az'	DF section: predicted azimuth angle
ZRA	Az or a	Azimuth angle or right ascension of satellite

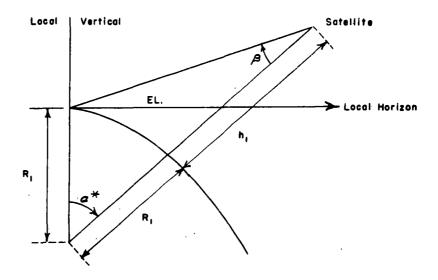


Illustration of Angles β , a Figure 2.1



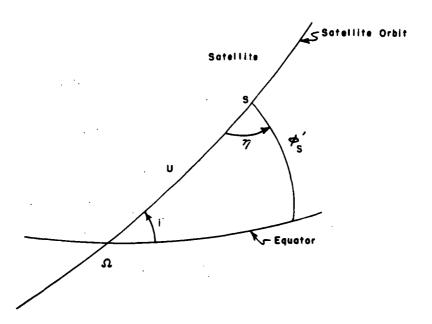


Illustration of Angle η Figure 2.2

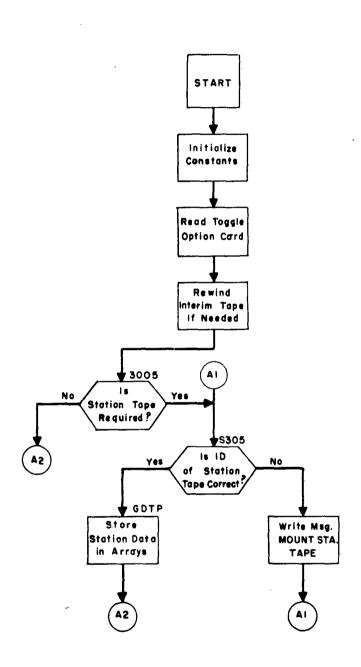

KEY: Read and Examine Input Data

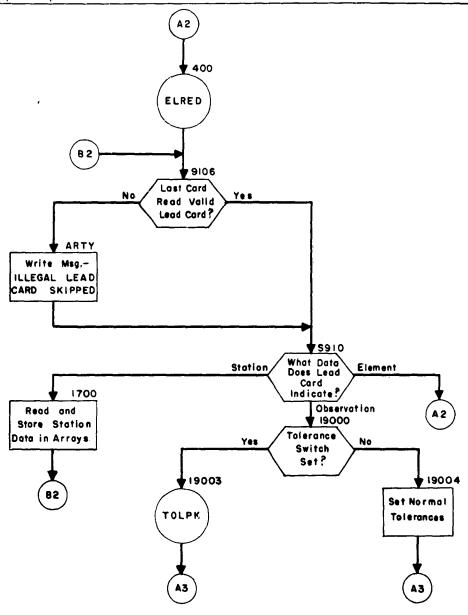

KEY:


Perform Control Functions for Observations


ELRED

Read and Store Elements in Arrays

TOLPK


Retrieve Tolerances from Table

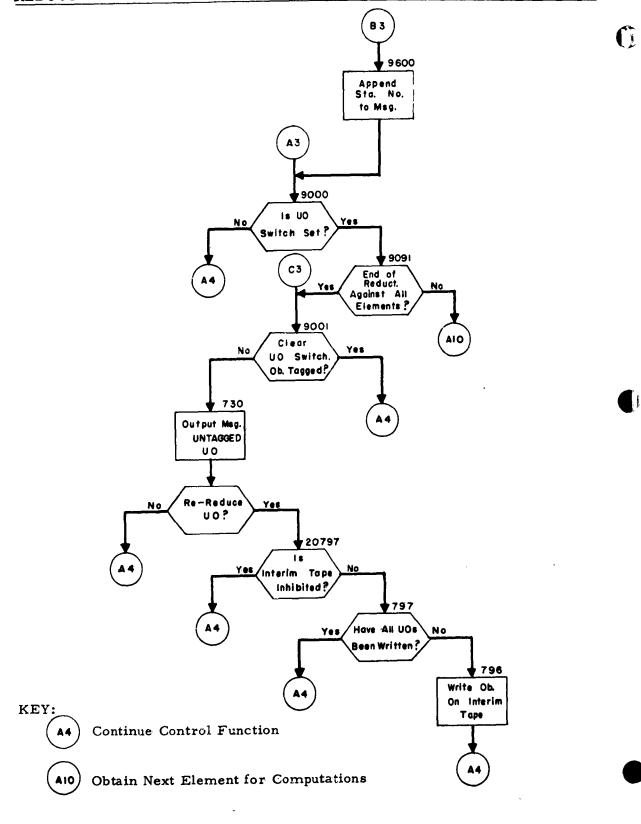

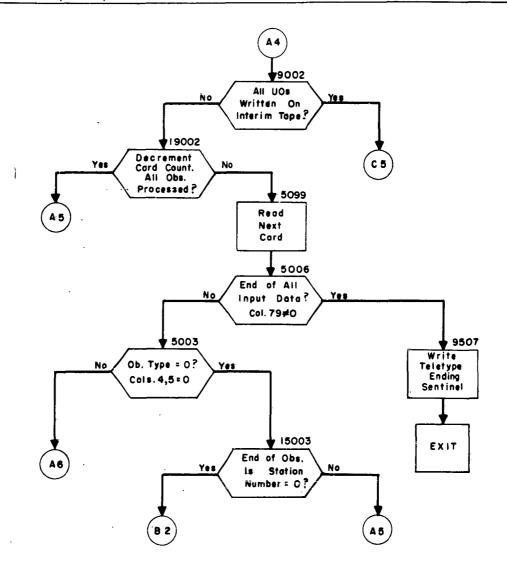


KEY:

- B2 Test Validity of Lead Card
- Process an Unknown Observation, If Any, From Interim Tape
- (c5) Read an Observation From Interim Tape
- (A6) Continue Processing Observation

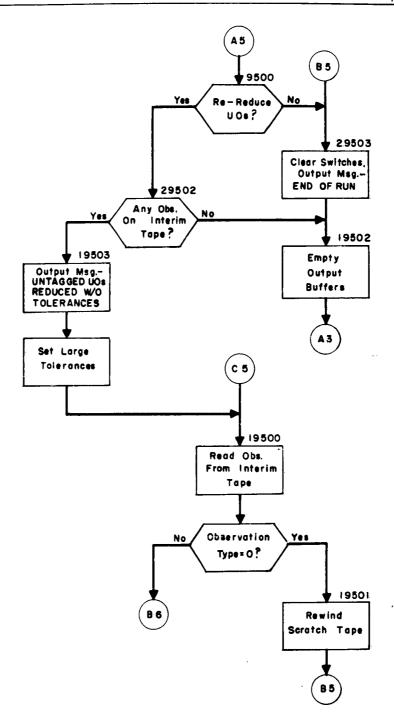


- (A3) Perform Control Functions for Obs.
- 66 Continue Processing of Unknown Observation from Interim Tape

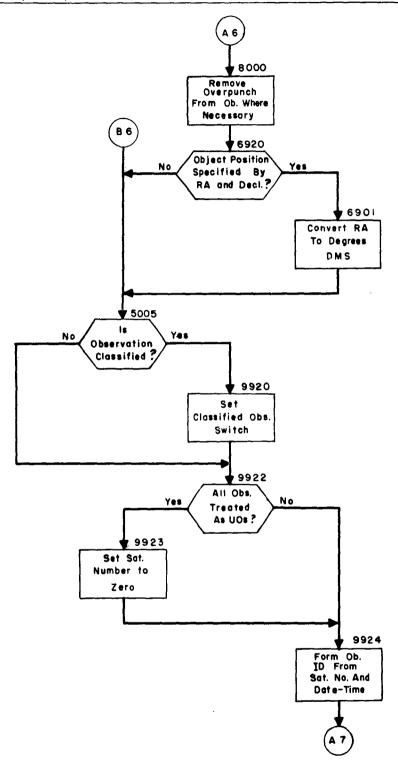


KEY:


(A7) Examine Observation for Legal Fields

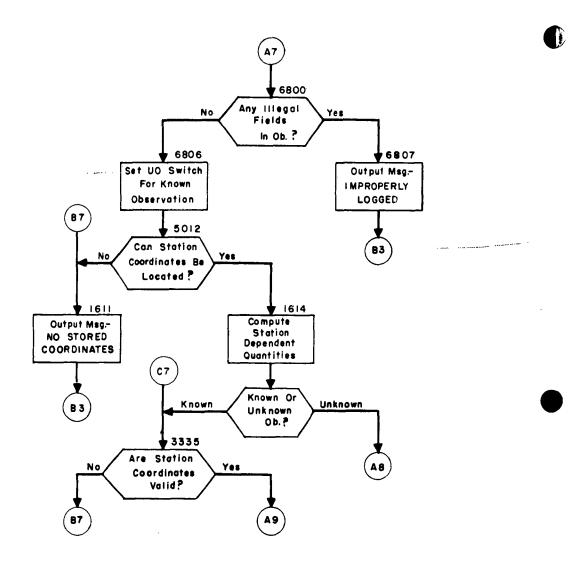

- (A8) Perform Control Functions for Unknowns
- (83) Return to Control Portion of Program
- (A9) Determine Observation Type

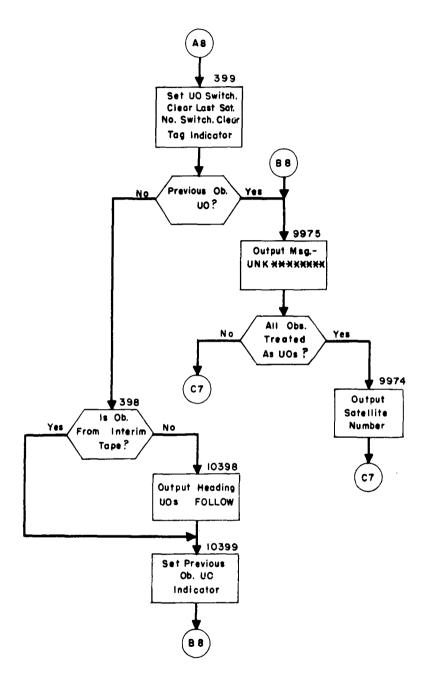



(c7) Continue Processing Unknown Observation

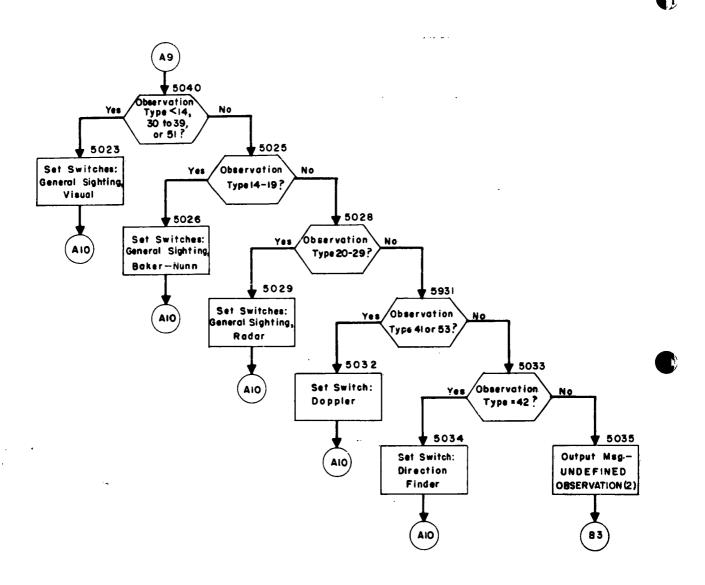

- KEY:


 (83) Perform Control Functions for Observations
 - (AIO) Obtain Element Set for Computations

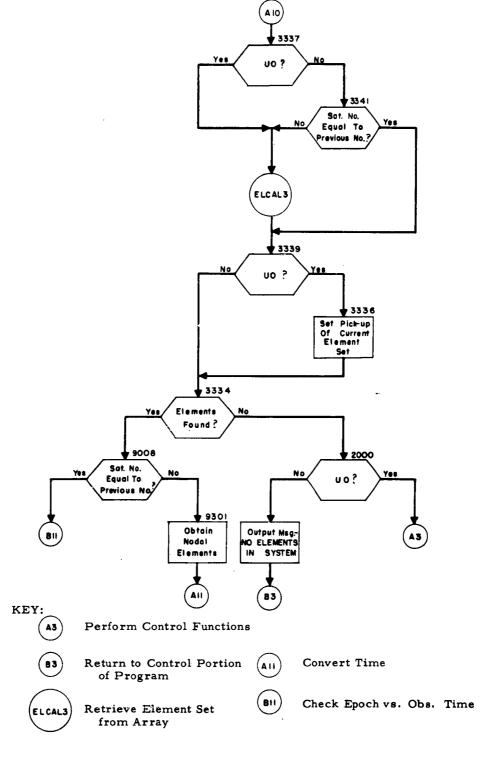

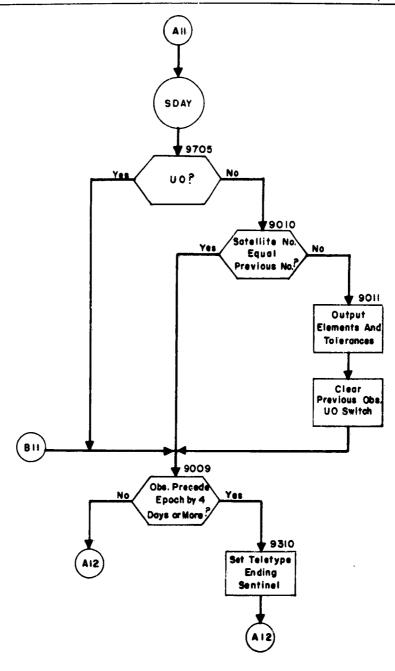


Make Preliminary Checks on Observation


SDAY Convert Smithsonian Day to Day of Year

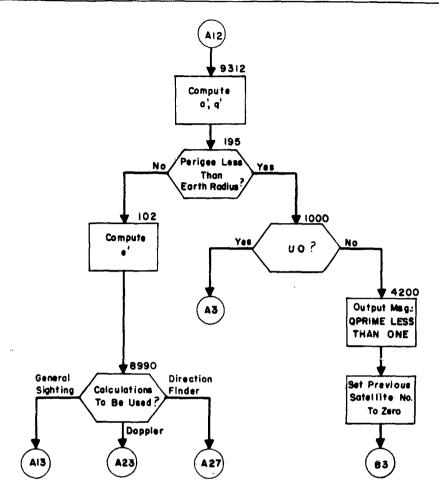


- (A3) Perform Control Functions for Observations
- (83) Return to Control Section of Program
- (A13) General Sighting Reduction
- (A23) Doppler Sighting Reduction
- A27 Direction Finder Reduction

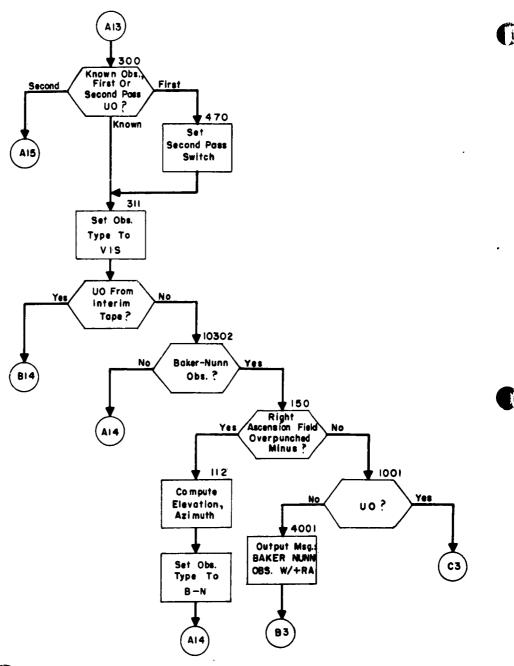


- (83) (C3) Return to Control Program
- (A14) Preliminary Computations
- Bypass Previous Computations,
 Continue Processing

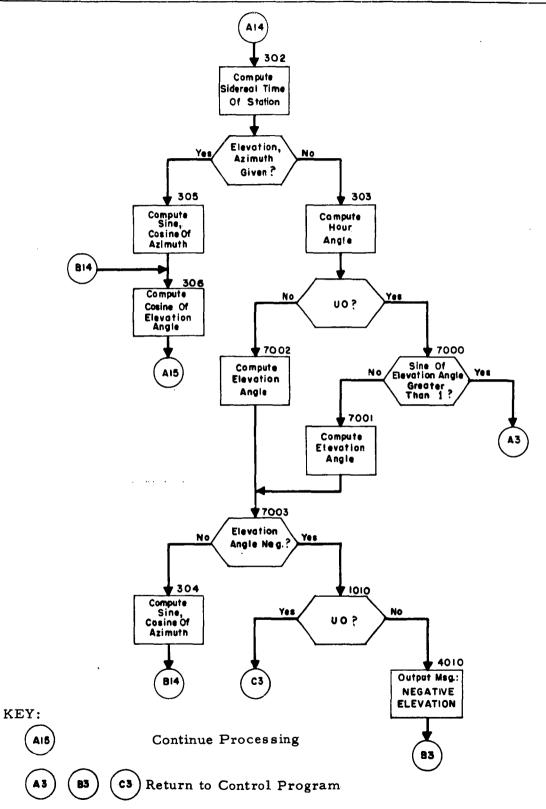


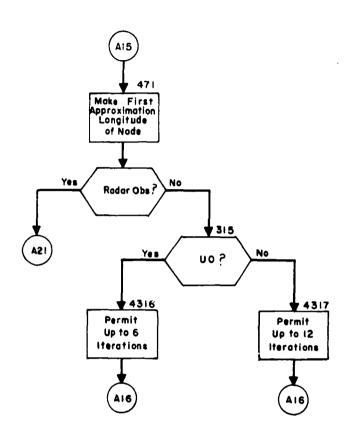


- Al6 Begin Approximations to Geocentric Latitude of Satellite
- (A21) Computations for Radar Observations

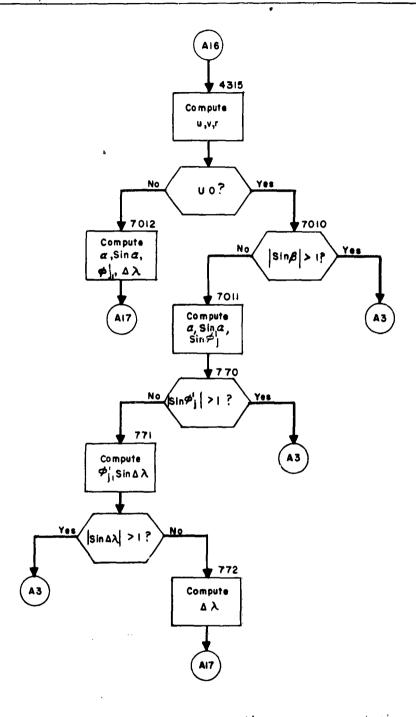

- A3) Return to Control Program
- (A17) Test for Convergence of Computations

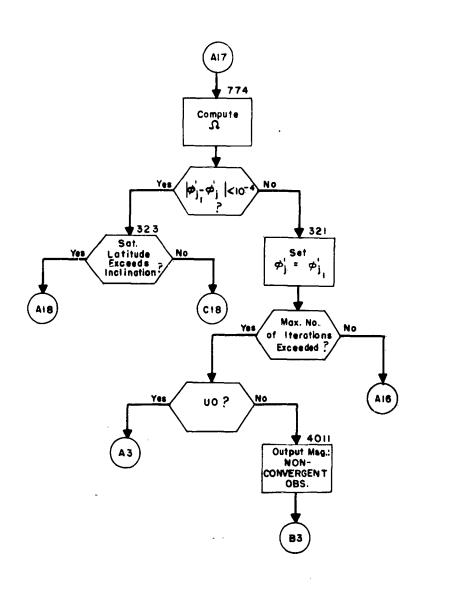


- A3) (83) Return to Control Program
 - (A16) Return to Next Iteration
 - (A:8) Test Range of Satellite Latitude and Inclination
 - (CIB) Continue Processing

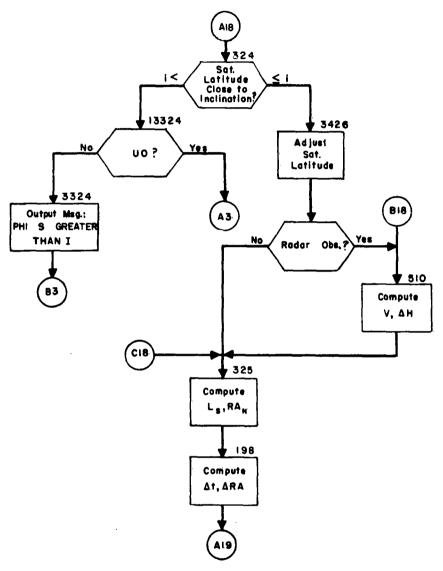


KEY:

- (A3) (B3) Return to Control Program
 - (AIS) Final Computations General Section

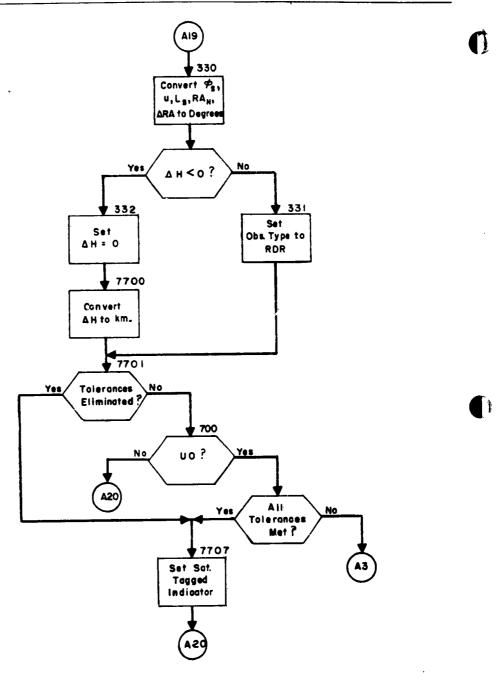


(A3) Return to Control Program

(A20) Output Results

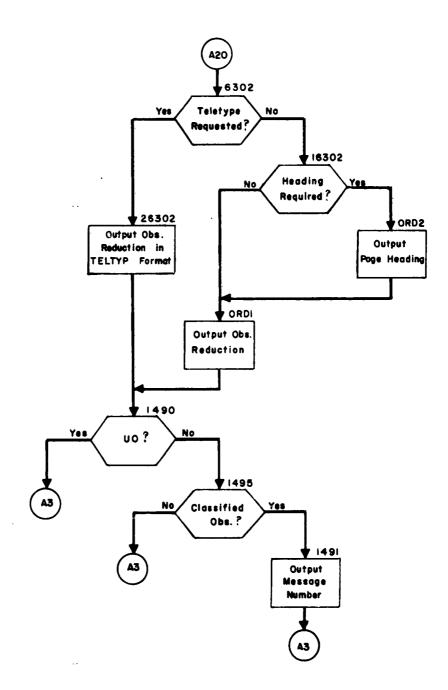


(A3) Return to Control Program

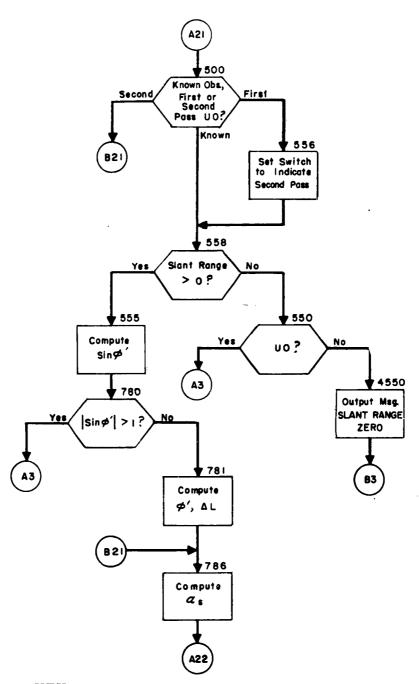


(A3) (B3) Return to Control Program

See if Reasonable to Continue Computations with Current Element Set

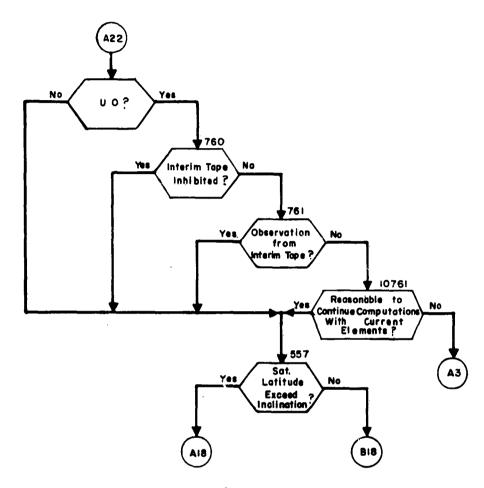


- (A3) Return to Control Program
- (AIS) Test Range of Satellite Latitude and Inclination
- (818) Final Computations for General Section

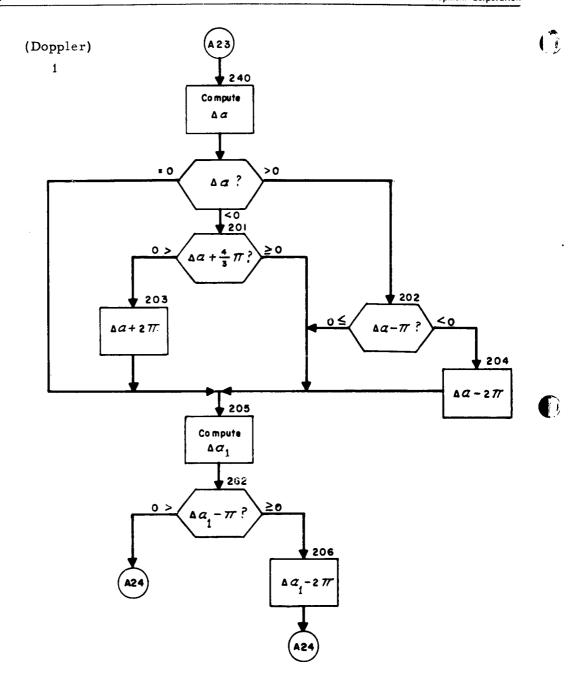


A24

Set Final Quadrant Constants

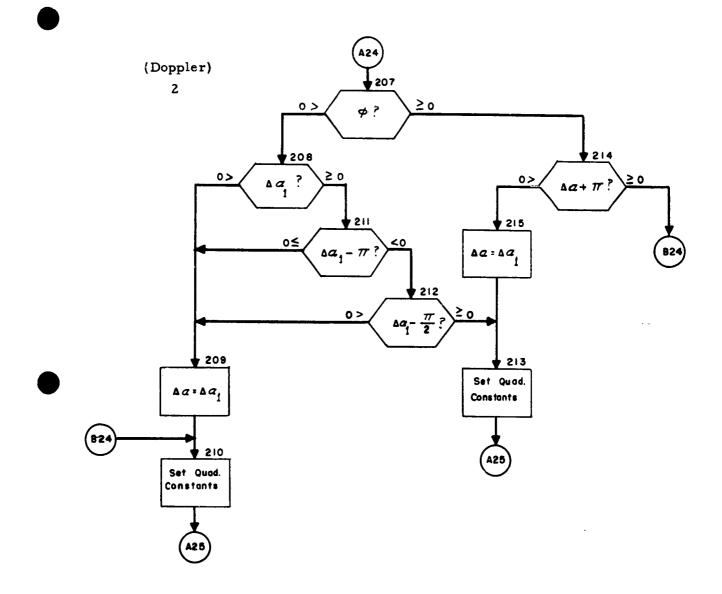


Begin Doppler Computations

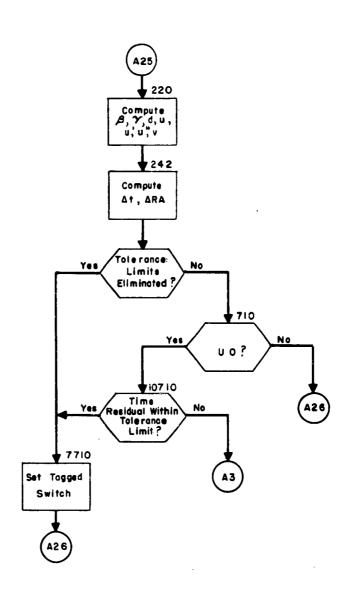

- (A3) Return to Control Section
- (A26) Output for Doppler

(Doppler)


4

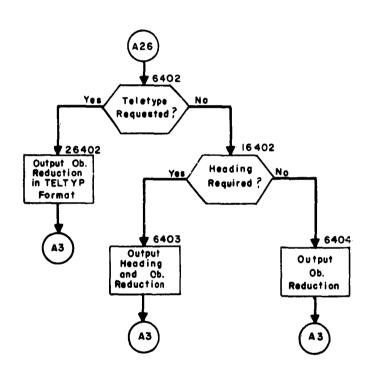


KEY:

(A3)

Return to Control Section

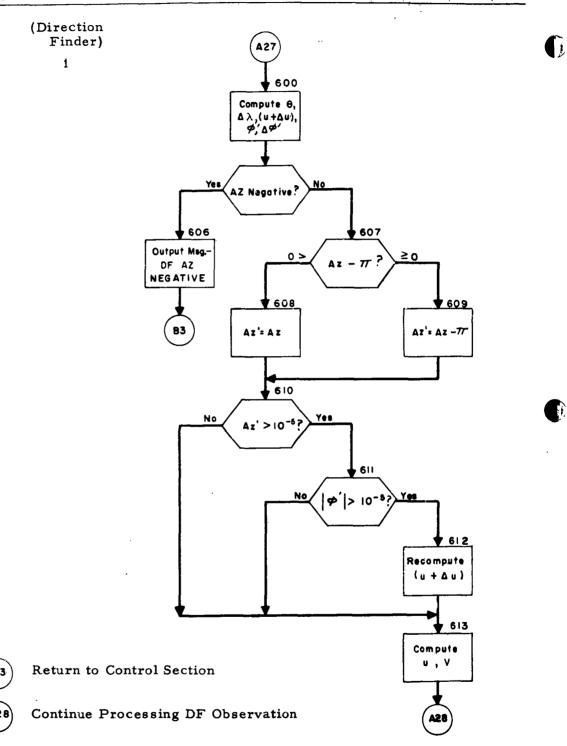


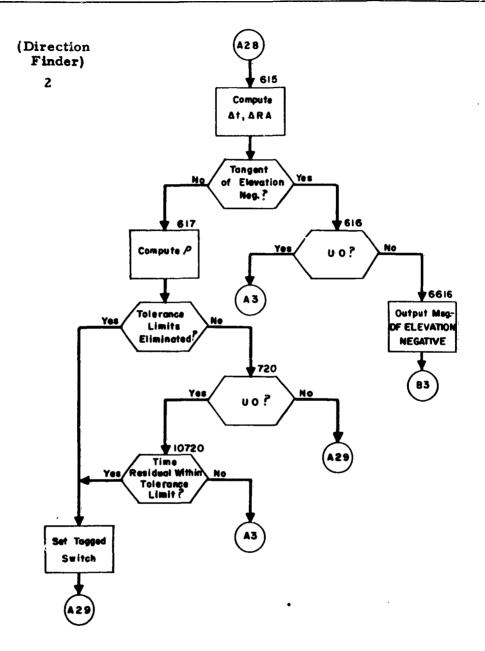

- (A3) (83) Return to Control Section
- Output for Direction Finder


(Direction Finder)

3

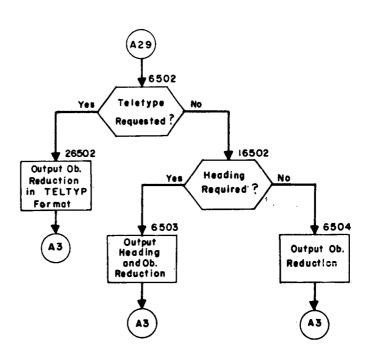


KEY:

(A3) Return to Control Section

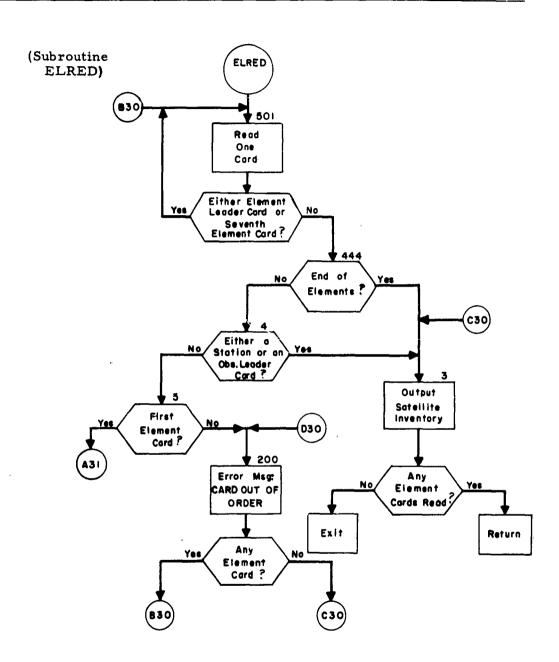


(A31) Read Element Set

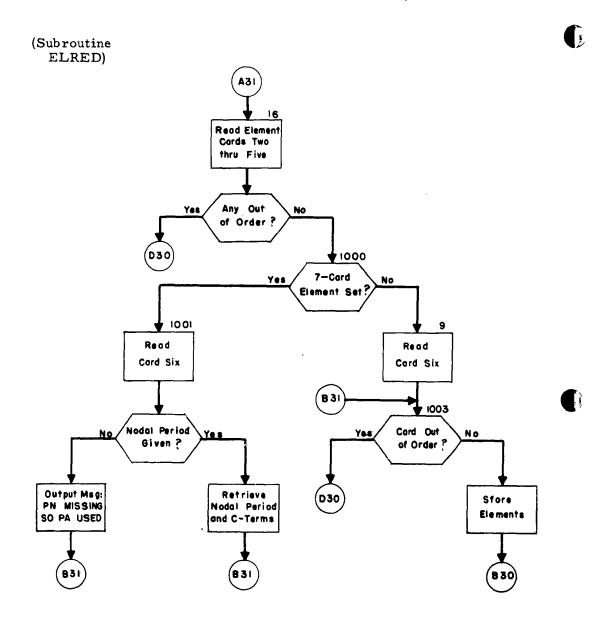

830 Return to Card Read

(Subroutine ELCAL3)

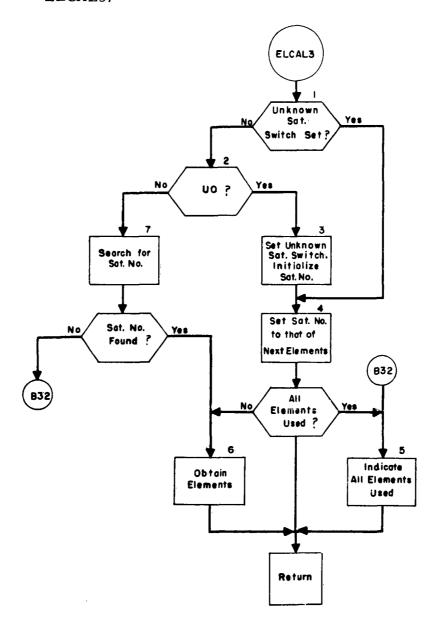

3.1 ROC, Radar Orbit Computation

3.2 Function

The orbital elements of a satellite are computed from either the radar observations of the elevation angle, azimuth angle and slant range, or directly from the geocentric rectangular coordinates and velocities.

The program is useful in obtaining orbital elements for newly launched satellites, in generating a new set of elements for satellites that have not been recently sighted, or in correcting the elements of a satellite.

A predicted orbit can be based on as few as three consecutive observations recorded along a single tracking run of a big radar, such as Millstone. An odd number of observations must be supplied. The move observations given the better the results. The midpoint of the radar run is first determined. Then the other points are picked up in pairs, on either side of the midpoint, and effectively averaged. The time span between individual pairs should be greater than forty (40) seconds. The geocentric rectangular coordinates of the midpoint are then determined and the elements computed.

If the geocentric rectangular coordinates and velocities of a point are used as input to the program, the averaging procedure is skipped and the orbital elements are computed directly.

3.3 Input

A request card precedes either input option (1) or (2). The format of this card is as follows:

Cols. 1-3 Option (1) - Number of observation cards to be read. Must be an odd integer between 3 and 999.

Option (2) - field ignored

Cols. 6-17 Alphanumeric satellite name or identification used in output.


Cols. 18-35 Alphanumeric date used as part of identification for output.

Col. 41 l - element cards requested as output

Col. 42 1 - Option (1) - x, y, z, x, y, z

printed for the midpoint of the observations.

- Option (2) - field ignored

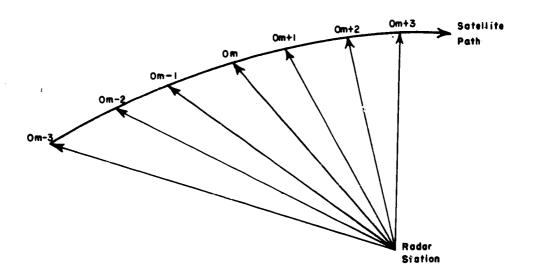

Representation of a Radar Run

Fig. 3.1

Cols. 72-80 Must be blank.

Input option (1) should be used if orbital elements are to be computed from radar observations. Option (2) should be selected if the orbital elements are to be computed from the geocentric rectangular coordinates and velocities of a point in space. The input decks should be as follows:

- 1. Radar observations supplied.
 - 1. Request card
 - 2. Standard station card
 - 3. An odd number of observation cards (3 to 999) in order of increasing time.
 - 4. A card with a nine (9) punch in column 79, used to signal the end of the data deck.
- 2. $x, y, z, \dot{x}, \dot{y}$, and \dot{z} supplied.
 - 1. Request card
 - 2. Rectangular coordinates in the following format:

Cols. 1-14 x in kms.

Cols. 15-28 y in kms.

Cols. 29-42 z in kms.

Cols. 43-46 Year of epoch

3. Velocity components in the following format:

Cols. 1-14 \dot{x} in kms./sec.

Cols. 15-28 y in kms./sec.

Cols. 29-42 ż in kms./sec.

Cols. 43-56 Day of year of observation of coordinates.

4. Card with a nine (9) punch in column 79, used to terminate the data deck.

The quantities $x, y, z, \dot{x}, \dot{y}, \dot{z}$, and day of year must have a decimal point punched somewhere in the field.

3. 4 Output

There are two output options (A) and (B) in addition to the normal output describedunder (C).

A. This option may be requested only under input option (1). If selected, the geocentric rectangular

coordinates and velocity components, at the mean time of the input observations, will be printed. The x, y, and z coordinates in kilometers will be preceded by the labels XX=, YY=, ZZ=, and the velocity components in kilometers per second will be preceded by the notations XDER=, YDER=, and ZDER. The time of the observation in the day of year notation will be labled TIME=.

- B. This output option if selected will cause a punch out of the standard six card element set. The following quantities will be punched: satellite number (as read in from the observation card), element card number, satellite name, eccentricity, inclination, year of epoch, time of epoch in day of year notation, nodal period at epoch, right ascension of ascending node, argument of perigee, and perigee distance. All other fields of the six card element set are left blank since the quantities can not be computed.
- C. The normal output will be printed in the format described below.

The first line will contain the heading RADAR ORBIT COMPUTATION followed by the station name as read from the station card. The second line has the label satellite followed by the alphanumeric name as supplied on the request card. This is followed by the satellite number which was read from the observation cards. The date supplied on the request card appears on the third line of output. The elements which have been computed are then listed under appropriate headings as follows: the same-major axis in km. and earth radii, the right ascension of the ascending node in degrees, the radius vector in km., eccentricity and its squared term, the nodal period in days and minutes, the argument of perigee in degrees, the velocity in km. per sec., the perigee

.

distance in km. and in earth radii, the time of the last perigee pass in days, the inclination in degrees, the apogee distance in km. and in earth radii, and the time of the last nodal crossing in days.

3.5 Processing

If input option (B) is used, the elements are computed directly from the $x, y, z, \dot{x}, \dot{y}$, and \dot{z} supplied as input. Otherwise, these coordinates are computed from the station coordinates and the radar observations. An odd number of consecutive observations, at least three, must be supplied. The midpoint, or middle observation, of a radar run is chosen. The other points are selected in pairs, one from each side of the midpoint. The time span between the individual observations in a pair should be greater than 40 seconds.

For each observation, the three topocentric coordinates are converted into the geocentric rectangular coordinates x, y, and z. Next, the velocity components \dot{x}, \dot{y} , and \dot{z} are found for each pair of observations and are averaged together for the final velocity components at the midpoint.

The orbital elements are then computed from the postion and velocity components. The magnitude of the radius vector and the velocity are computed directly from the rectangular coordinates and velocity components. The semi-major axis, nodal period, eccentricity, perigee and apogee distance are computed next, as well as, the inclination and the right ascension of the ascending node. The true, eccentric, and mean anomalies are found and the time of perigee and nodal crossing are computed. Output is then written as specified in the output section.

()

3.6 Formulation

If input option 2 used go to D, otherwise compute A, B, C.

A. $\phi' = \tan^{-1}(.99329985 \tan \phi)$

$$R = \frac{.9966443}{\sqrt{1 - .00670015 \cos^2 \phi'}} + \frac{H}{6378.174}$$

B. Determine rectangular coordinates for each observation (i).

$$r_i = \sqrt{R^2 + \rho_i (\rho_i + 2 \cdot R \sin h)}$$

$$\beta_i = [|\sin^{-1}(R\cos h_i/r_i)|] \quad (0^{\circ} \le \beta \le 90^{\circ})$$

$$\alpha_i^* = \left| \frac{\Pi}{2} - \beta_i - h_i \right|$$

$$\phi'_s = \sin^{-1}(\cos \alpha_i^* \sin \phi' + \sin \alpha_i \cos \phi' \cos Az_i)$$

$$\Delta \lambda_s = \sin^{-1}(\sin \alpha_i^* \sin Az_i/\cos \phi_s')$$

$$\lambda_s = \lambda - \Delta \lambda_s$$

$$\theta_{G} = [\theta_{o} + .9856472 \text{ day}_{i} + 360.9856472 \text{ fract. day}_{i} - \lambda_{s}], (0 \le \theta_{G} < 360^{\circ})$$

$$x_i = r_i \cos \phi_s' \cos \theta_G$$

$$y_i = r_i \cos \phi_s' \sin \theta_G$$

$$z_i = r_i \sin \phi_s'$$

$$\underline{r_i} = (x_i^2 + y_i^2 + z_i^2)^{3/2}$$

Compute velocity components by effectively averaging individual x_j, y_j, z_j, components of each pair for final x, y, z components. Then compute velocity and r. Initially indices are as follows:
 \$\mathbb{l}\$ = 1 signifying first observation, n is total number of observations, m is midpoint observation.

$$\tau_{12} = (t_{m} - t_{\ell}) (.07436574/60)$$

$$\tau_{23} = (t_{n} - t_{m}) (.07436574/60)$$

$$\tau_{13} = (t_{n} - t_{\ell}) (.07436574/60)$$

$$G_{1} = \tau_{23}^{2}/\tau_{12}\tau_{23}\tau_{13}$$

$$G_{2} = (\tau_{23}^{2} - \tau_{12}^{2})/\tau_{12}\tau_{28}\tau_{13}$$

$$G_{3} = \tau_{12}^{2}/\tau_{12}\tau_{23}\tau_{13}$$

$$H_{1} = \tau_{23}/12$$

$$H_{2} = (\tau_{23} - \tau_{12})/12$$

$$H_{3} = \tau_{12}/12$$

$$d_{1} = G_{1} + H_{1}/\underline{r}_{\ell}$$

$$d_{2} = G_{2} + H_{2}/\underline{r}_{m}$$

$$d_{3} = G_{3} + H_{3}/\underline{r}_{n}$$

$$\dot{x} = -d_{1}x_{\ell} + d_{2}x_{m} + d_{3}x_{n}$$

$$\dot{y} = -d_{1}y_{\ell} + d_{2}y_{m} + d_{3}y_{n}$$

$$\dot{z} = -d_{1}z_{\ell} + d_{2}z_{m} + d_{3}z_{n}$$

Update ℓ and n. $\ell = \ell + 1$, n = n - 1. If $\ell = m$, go on. Otherwise return to C and compute \dot{x} , \dot{y} , \dot{z} for another pair of observations.

$$\dot{x} = \frac{\sum_{j=1}^{m} \dot{x}_{j} / \ell, \text{ for } \ell \text{ pairs}}{\dot{y} = \sum_{j=1}^{m} \dot{y}_{j} / \ell}$$

$$\dot{z} = \sum_{j=1}^{m} \dot{z}_{j} / \ell$$

D. Compute elements

$$\underline{\mathbf{r}} = \sqrt{\mathbf{x}^2 + \mathbf{y}^2 + \mathbf{z}^2}$$

$$V = \sqrt{\dot{\mathbf{x}}^2 + \dot{\mathbf{y}}^2 + \dot{\mathbf{z}}^2}$$

$$\frac{\dot{\mathbf{r}}}{\mathbf{r}} = (\mathbf{x}\dot{\mathbf{x}} + \mathbf{y}\dot{\mathbf{y}} + \mathbf{z}\dot{\mathbf{z}})/\underline{\mathbf{r}}$$

$$C_{5} = \left[2(631.353746)^{2}/\underline{\mathbf{r}}\right] - \mathbf{V}^{2}$$

$$\mathbf{a} = \left((631.353746)^{2}/C_{5}\right)/6378.174$$

$$P_{n} = .058672947 (a)^{3/2}$$

$$\mathbf{e} = \sqrt{1} \quad (\mathbf{V}^{2} - \dot{\mathbf{r}}^{2}) \, \underline{\mathbf{r}}^{2}/631.353746^{2} \, \mathbf{a}$$

$$\mathbf{p} = \mathbf{a} \, (1 - \mathbf{e}^{2})$$

$$\mathbf{q} = \mathbf{a} \, (1 - \mathbf{e})$$

$$\mathbf{Q} = \mathbf{a} \, (1 + \mathbf{e})$$

$$\mathbf{i} = \left[\cos^{-1}\left((x\dot{\mathbf{y}} - y\dot{\mathbf{x}})/631.353746\,\sqrt{\mathbf{p}}\right)\right], \, (-90^{\circ} \leq i \leq + 90^{\circ})$$

$$\mathbf{RA} = \tan^{-1}\left(\frac{y\dot{\mathbf{z}} - z\dot{\mathbf{y}}}{x\dot{\mathbf{z}} - z\dot{\mathbf{x}}}\right)$$

$$\sin \mu = \frac{z}{\underline{\mathbf{r}} \sin i}$$

$$\cos \mu = (\mathbf{x} + (\mathbf{z} \sin RA \cot i)/\underline{\mathbf{r}} \cos RA$$

$$\mu = f_{qual} (\cos \mu, \sin \mu)$$

$$\cos \nu = (\mathbf{p}/\underline{\mathbf{r}} - 1)/\mathbf{e}$$

$$\mathbf{v} = f_{qual} (\cos \mathbf{v}, \dot{\underline{\mathbf{r}}})$$

$$\omega = [\mu - \mathbf{v}], \, (0^{\circ} \leq \omega < 360^{\circ})$$

$$\tan \frac{E_{1}}{2} = \sqrt{\frac{1 - \mathbf{e}}{1 + \mathbf{e}}} \, \tan \frac{\dot{\mathbf{v}}}{2}$$

$$M_{1} = E_{1} - \mathbf{e} \sin E_{1}$$

$$\Delta t_{1} = M_{1} \cdot \mathbf{P}_{n}/2\Pi$$

$$T_{\mathbf{p}} = t_{\mathbf{obs}} - \Delta t_{1}$$

$$\tan \frac{E_2}{2} = \sqrt{\frac{1-e}{1+e}} \tan \frac{\omega}{2}$$

$$M_2 = E_2 - e \sin E_2$$

$$\Delta t_2 = M_2 \cdot P_n/2\Pi$$

$$T_n = T_p - \Delta t_2$$

3.7 Glossary

Location	Symbol	Meaning
AMEAN	M_1	Mean anomaly
AMEANN	M ₂	Mean anomaly
ANGLE	i	Inclination in degrees
APOGEE	Qo	Apogee in km above the earth
APOGER	Q	Apogee distance in earth radii
ARGPER	ω	Argument of perigee in degrees
AXIS	a	Semi-major axis in km.
AZIM	Az	Azimuth from observation card
BETA	β	See Figure 3.2 angle β
BUT	T _o	Time of epoch (day of year)
COP	· ·	Constant 631.353746 squared
COSRA		Cosine of right ascension of ascending node at epoch
COSU		Cosine of argument of latitude
COSV		Cosine of true anomaly
CUT		Time of epoch
DAT	\mathtt{d}_1	Coefficient used to compute \dot{x} , \dot{y} , \dot{z}
DAY	-	Day of observation
DECLA	$\varphi_{\mathbf{s}}^{ \prime}$	Geocentric latitude of satellite
DELONG	Δλ _s	Difference in longitude between station and subsatellite point
DELTAN		Difference in time from perigee to node
DELTAT		Time of obs minus time of perigee
DET	d ₂	Coefficient used to compute $\dot{x}, \dot{y}, \dot{z}$
DOT	d ₃	Coefficient used to compute $\dot{x}, \dot{y}, \dot{z}$
E	e	Eccentricity
ECCA	\mathbf{E}_1	Eccentric anomaly
ECCAN	E ₂	Eccentric anomaly .
ELAPSE	_	Day of year of observation
ELEV	h	Elevation from observation
ESQUA	e ²	Eccentricity squared
FRACT		Fractional day of observation
GAT	G_1	Coefficient used to compute \dot{x},\dot{y},\dot{z}
GEOCL	φ'	Geocentric latitude of station

GEOGL	ф	Station latitude
GET	G ₂	Coefficient used to compute x, y, z
GOT	G_3	Coefficient used to compute $\dot{x}, \dot{y}, \dot{z}$
GRI	J	Time of observation minus time at node
HALB	n	Number of pairs of observations
HAT	$^{\rm H_1}$	Coefficient used to compute $\dot{x}, \dot{y}, \dot{z}$
HEIGHT		Station height in meters.
HET	H ₂	Coefficient used to compute \dot{x},\dot{y},\dot{z}
нот	H_3	Coefficient used to compute \dot{x},\dot{y},\dot{z}
HOUR	-	Hour of observation
HW		Hour after hour of first observation
IDCI		Input tape
IDCO		Output tape
IFLAG		End of input indicator
ISSW1		Output option= 1 for punched element cards
ISSW2		Output option= 1 for Cartesian coordinate output
ITYPE		Input card type, non-zero for end input
IYR		Year of observation
KNAVE		Time of epoch
\mathbf{L}_{\cdot}		Observation card number being processed
M		Midpoint observation (number)
MO		Month of observation
N		Obs paired with L (number)
		Number obs cards to be read
NATNO		Satellite number
NK	•	Overpunched column l from obs. card
NL		Last two digits of satellite number from obs. card
PAK	p ·	Semi-latus rectum
PERIG	q.	Altitude at perigee in km.
PERIOD	P	Nodal period at obs. time in days
PERIOM	P_1	Period in minutes
PERIR	q	Perigee distance in earth radii

RADIUS	R	Earth radius at station
RASC	a*	Angle a*, see Figure 3.2
RAT	<u>r</u> 3	Array of $\underline{\mathbf{r}}^3$
RAXIS	a _r	Semi-major axis in earth radii
RITASC	RA	Right ascension of ascending node in degrees
RK		Constant 6378.174 km./e.r.
ROŎT	r	Distance from center of earth to satellite
RT		Constant . 07436574/60= Ke /60
RX		Constant ·017453295 deg/rad.
SATNO		Satellite number
SCAN		Time of ob. in seconds
SDAT		Smithsonian date of ob.
SECOND		Seconds of observation
SIDE	$^{\theta}\mathbf{g}$	Sidereal time
SINRA	5	Sine of right ascension of ascending node
SINU		Sine of argument of latitude
SLANT	ρ	Slant range from observation
SLONG	λ	Longitude of subsatellite point
SMIN		Minute of observation
SMONTH		Month of observation
SNAME1 SNAME2		Alphanumeric satellite name
STAME)		
STEME		
STOME		Alphanumeric station name
STUME		
TAME	т ₁₂	Elapsed time between obs. and
2	12	middle obs.
TAZ		
TEZ }		Alphanumeric date of observation
TIZ		F
TEME	^T 23	Elapsed time between middle and last obs.
THE		Tangent of E ₄ /2

THEN		Tangent of E ₂ /2
TIME		Array of obs. times
TINOD		Time of node in days
TINODS		Time of node in Smithsonian days
TIPER		Time of perigee in days
TIPERS		Smithsonian time of perigee in days
TOBS		Day of year of middle observation
TOBSS		Day of Smithsonian year of middle obs.
TOME	т ₁₃	Elapsed time between obs. and last obs.
TRUE	v	True anomaly
U	u	Arg. of lat. of sat. in orbit plane
VECDOT	ř	First derivative of r in km/sec.
VECTOR	r	Vector magnitude in km.
VELOX	v	Velocity in km/sec.
VK		Computed 7.90529382/no. of pairs of obs.
W		Day after day of first observation
WLONG	λ _o	Station longitude
X		Array of computed x-coordinates
XDER	$\Sigma \dot{x}_i$ vk	Yields final \dot{x} velocity component
XDOT	x ̇́	x velocity component
XDUMP	$\Sigma \dot{x}$	Summation of individual x components
XX	x	x coordinate of \underline{r} on km.
Y		Array of computed y-coordinates
YCONST	θ_{o}	Sidereal time at start of year of obs.
YDER .	$\Sigma \dot{y}_i \cdot vk$	Yields final y velocity component
YDOT	ý	y velocity component
YDUMP	Σÿ	Summation of individual y components
YEAR		Last digit of year of observation
YR		Year of observation
YY	у	y coordinate of \underline{r} in km.
Z		Array of computed z-coordinates
ZDER	$\Sigma \dot{z}_i \cdot vk$	Yields final z velocity component
ZDOT	ż	z velocity component
ZDUMP	$\Sigma \dot{z}$	Summation of individual z -components
ZZ	z	z coordinate of \underline{r} in km.



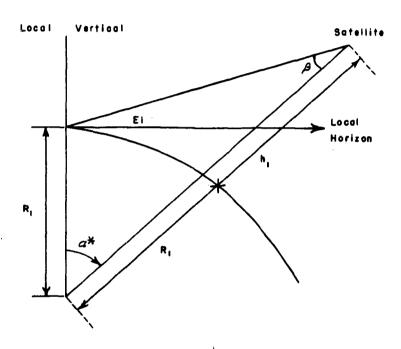



Illustration of Relations between Quantities


Fig. 3.2

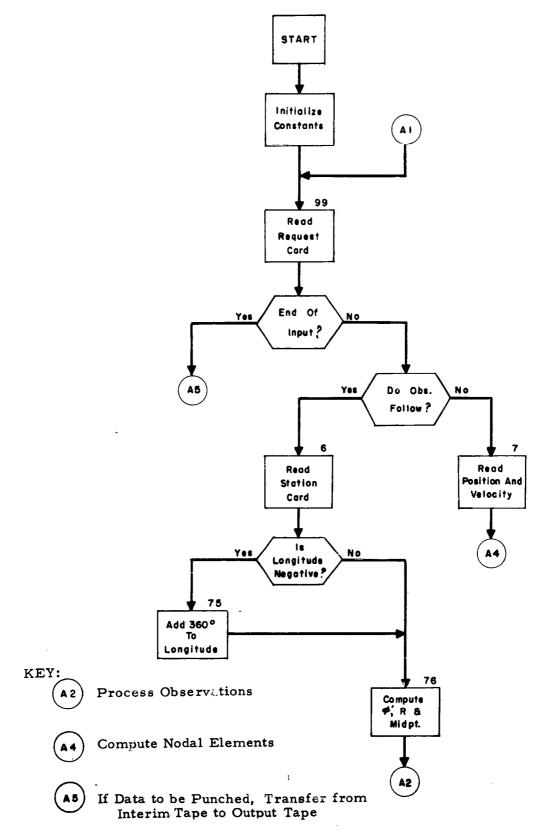


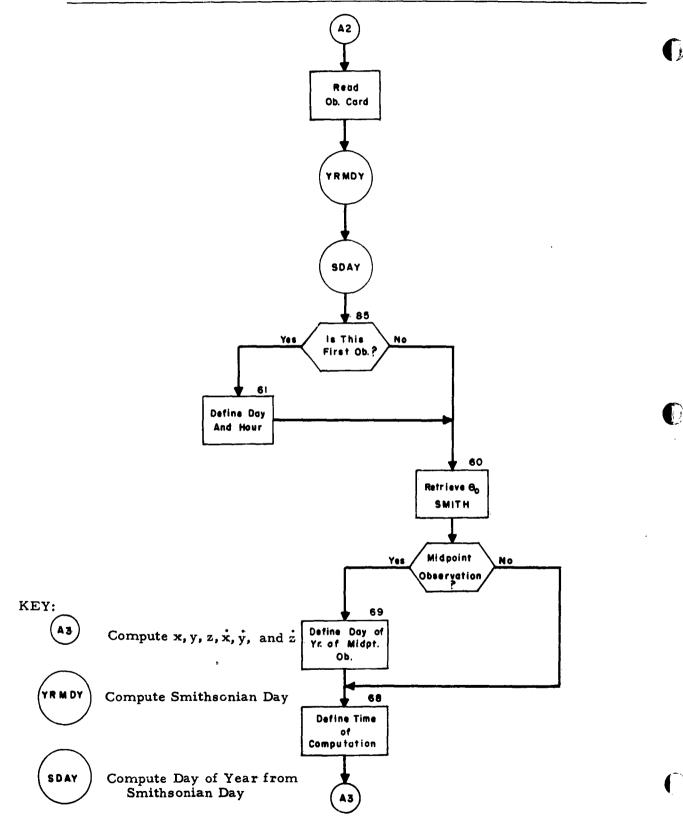

KEY:

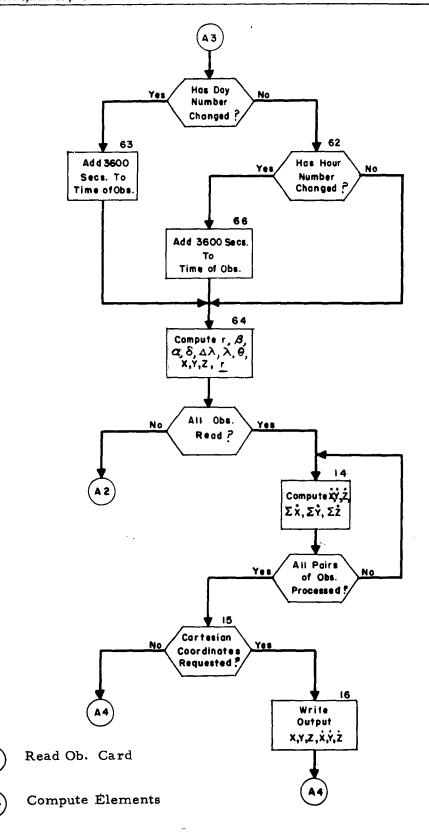

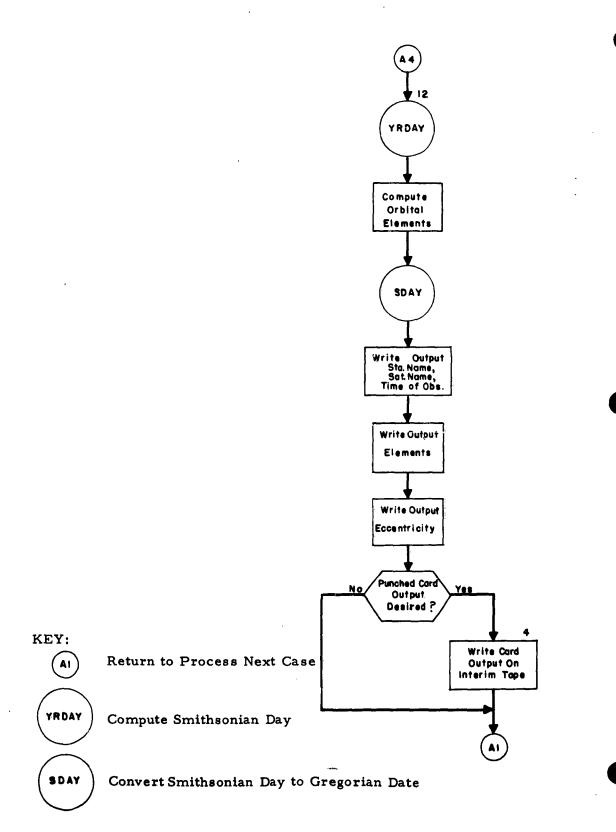

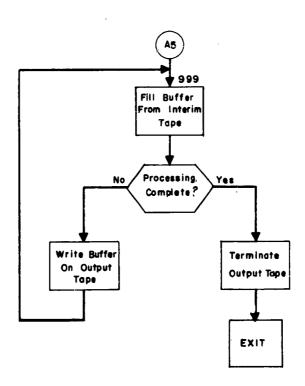

- QUAC(X, Y) places an angle in the proper quadrant (0 to 2π) after taking the absolute value of the arc sine of the angle,

 (| sin⁻¹ Y |). The following arguments must be given:

 X = cosine of the angle

 Y = sine of the angle
- QUAL(X, Y) places an angle in the proper quadrant (0 to 2π) after taking the arc cosine of the angle, (cos⁻¹X). The following arguments must be given:

 X = cosine of the angle

Y = sine of the angle

QUAT(Y, Z) - places an angle (the eccentric anomaly) in the proper quadrant (0 to 2π) after taking the arc tangent of the angle times two, (2 tan⁻¹ Z). The following arguments must be given:

Y = sine of the true anomaly (v)

Z = tangent of the eccentric anomaly over two, $(\tan \frac{E}{A})$

SMITH(X) - retrieves θ_0 for the year of computation, given the argument X which is the last digit of the year.

4.1 LOCVEC, Vector Coordinates for Lockheed

4.2 Function

The program computes the predicted position and velocity for Lockheed from nodal element sets. The output is written on magnetic tape for printing and for punching five-channel paper tape for teletype transmission. The teletype data is received at Sunnyvale Tracking Center where it becomes binary input for a CDC 1604 computer.

4.3 Input

The input data is ordered as follows:

- (1) Up to five hundred request cards
- (2) A card with a numeric punch (1-9) in col. 8.

 This indicates the end of the request deck.
- (3) Standard six or seven card element sets of the satellites in the request deck or all satellites (up to 500 sets).
- (4) A blank card which signals the termination of the element deck.

The elements sets do not have to be in the same order as the satellites appearing in the request deck.

The following information should be included on the request card:

- Cols. 1-3 The SPADATS satellite number
- Col. 8 Must be blank
- Cols. 9-12 The STC (Sunnyvale Tracking Center) satellite number, or if the SPADATS satellite number is used, it should be preceded by a nine (9) punch in col. 9.
- Cols. 13-20 The alphanumeric name of the satellite.
- Cols. 21-24 The alphanumeric abbreviation of the country of orgin.

4.4 Output

4. 4. 1 Printed

There is one output line for each satellite. The order is the same as that of the request deck. Each line contains:

(a) the satellite number; (b) the Sunnyvale Tracking Center number or, if preceded by a nine (9), the SPADATS number;

(c) the element number; (d) the month, day, hour of epoch;

(e) seconds since the start of the epoch month; (f) epoch revolution number; (g) the x, y, z coordinates in feet, and the velocity components in feet per second.

4. 4. 2 Teletype

The basic message consists of a header and thirty-one words of five-level teletype punch. A visual header and a listable teletype header are included at the start of each message. The visual portion identifies the tape as a SPADATS vector with the characters "SP" and the four digit vehicle number; The listable header contains the word "SPADATS" followed by the vehicle number, the month, day and the nearest GMT hour of the last update of vectors. Tape contents and format are presented on the following pages.

4.5 Processing

The request cards are read into an array. This array is checked as each element set is read into core, and the element sets, for which vectors are required, are stored.

The nodal elements to be used are converted to \underline{N} , \underline{M} , sets as required by the Analytical Integration Routine (XYZSB). The required position and velocity components are obtained from this routine.

LOCVEC converts the position coordinates to feet and the velocity components to feet per second. These quantities are then written on the output tape for off-line printing through the UBC. The conversion to the required teletype format, described in the output section, is then achieved and written on the tape for off-line punching on five-channel paper tape. This teletype data becomes input for a CDC 1604 computer at the Sunnyvale Tracking Center.

TAPE CONTENTS AND FORMAT

Word No.	Content & Format
1	Check sum 2 ²⁴ (see note 1).
2 & 3	Identification number, 8 BCD characters (see note 2).
4	Revolution number for vector, 19 bits, D_{23} D_5 fixed integer, scaled 2^5 .
	Bits D ₄ -D ₀ are all zeros.
5	Bits D ₂₃ -D ₁₇ are all zeros.
	Bits D16 must be set equal to "l".
	Bits D ₁₅ -D ₁₄ must be zeros.
	Bits $D_{13}-D_0$ are vehicle numbers (0001 to 9999) fixed integer.
	This number will be supplied by the STA for each vehicle. (i.e. 1204 or 2203, etc.)
6	D ₂₃ -D ₁₆ , 8 bits all zeros.
	D ₁₅ -D ₁₃ , 3 bits fixed integer, number of vectors being transmitted for this particular vehicle. (This will probably always be 1. See further note 3)
	D ₁₂ -D ₀ are all zeros.
7	D ₂₃ - D _{0,24} bits all zeros.
8	Source, 4 BCD characters.
9	D ₂₃ -D ₀ 24 bits all zeros.
10	bj 11 11 g 11: 11 11
II	и и и и и
12	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
13	
14	H H H H H

15	D ₂₃ -D ₂₀ , 4 bits all zeros .
	D ₁₉ -D ₀ , 20 bits fixed integer, number of data points (or number of observations) used in fit.
16 & 17	t (machine time) see note 4.
18 & 19	x.)
20 & 21	Y position vectors; 48 bits, floating point.
22 & 23	z
24 & 25	x)
26 & 27	velocity vectors; 48 bits, floating point.
28 & 29	ż
30 & 31	σ (standard deviation of data)

- Note 1. Word 1 is a check sum of all bits on the tape. It does not include the parity bits. The check sum is formed by tabulating all 24 bit words on the tape and adding all bits.

 The overflow beyond the 24th bit is folded under and added to the previous sum to get the final check sum.
- Note 2. Words 2 and 3 give the identification number. Any 8 legal BCD characters are permissible. It is suggested that these words be used to indicate the Spacetrack object designation (i.e. 1961 A1 for 1961 Alpha 1, or 1960 B 2 for 1960 Beta 2).
- Note 3. The need for more than one vector at any time for one vehicle is not apparent in this case. Therefore, these 3 bits should always indicate 1.

- Note 4. Machine time is the number of seconds elapsed since 00 Hrs.,

 GMT, on the first of the month.
- Note 5. In Figure 1 the D's indicate data bits and the P's indicate parity bits. Note that there is both horizontal and vertical odd parity. Note the repeating pattern of data word start bits. There must be a tape start header and a tape stop pattern. If there are 10 different vehicles on one physical length of tape there must be 10 tape start headers and 10 tape stop patterns, one for each vehicle. The tape must be transmitted three times in succession.


	etc.		•		
	o ≯ o		•		
	DATA WORD 4	0000000		000000	d d d d d
	Ω ≷ ν		•		
FORMAT OF DATA TAPE	DATA WORD 3	0 0 0 0 0 0 P		0000000	4 4 4 4 4
	Οžν		•		
	DATA WORD 2	000000		0000000	4 4 4 4 4
			•		
	DATA WORD	D ₂₃ D D D D D ₃ P		D ₂₀ D D D D ₀ P	4 4 4 4
	DATA WORD START (DWS)		•		
	HEADER OR TAPE START		•		


. —			١.	٠	•	•	•	•	Ì
			١.		•		•	•	i
	TAPE	STOP	١.		•				ı
	₹	\succeq			•				ı
	_	S	١.	•	•	•	•	•	ŀ
			•	•	•	•	•	•	ŀ
			ے	٥	•	۵.	<u></u>	۵	
				Δ	•	Δ	Ω	۵	Ì
_	Δ		۵	0 0 0 0 0 0	•	Δ	Δ	ے	l
LAST DATA	*		۵	۵	•	Δ	۵	_	١
ૅર્	Š			$\overline{\Box}$	•	۵	$\overline{}$	_	ı
	>	> <u>'</u>		_	•	_	_	_	ı
			בין	ب		۵			1
			0	Δ	•	۵	Δ	٥.	1

Data words are 24 bits with horizontal and vertical parity.

lig. 4.1

FORMAT OF DATA TAPE HEADING

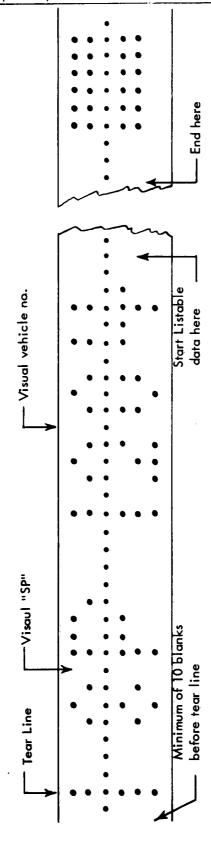

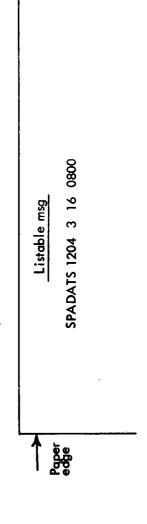

Procede listable msg.by a carriage return, 2 line feeds, and 1 letter. Follow listable msg.by a carriage return, 2 line feeds, and 1 letter.

. 6 Formulation

A. Convert nodal elements to \overline{N} , \overline{M} elements

1.
$$a = q/(1-e)$$

2.
$$p = q(1 + e)$$

3.
$$n_0 = .07436574/a^{3/2}$$

4.
$$a_{xn} = e \cos \omega$$

5.
$$a_{vn} = e \sin \omega$$

6.
$$E_N = -2 \tan^{-1} (\sqrt{(1-e)/(1+e)} \cdot \tan \omega/2)$$

7.
$$M = E_N - e \sin E_N$$

8.
$$L = \omega + M + \Omega$$

9.
$$C^{"} = (-360 n_0^2 c \pi^2)$$
 where $C^{"} = drag$. coeff; c is rate of change of period.

10.
$$k_e L_{so} = \frac{.000120717}{p^{7/2}} \left[3 - 5e^2 - \left| \cos i \right| \left(1 - \frac{3}{2} e^2 \right) - \sin^2 i \left(4 - \frac{27}{4} e^2 \right) \right]$$

- B. Use Analytical Integration Routine (XYZSB) to compute predicted position, <u>r</u>, and velocity, <u>r</u>, and intermediate quantities.
 Equations for this routine may be found in Aeronutronic Publication U-1691 page 4-78.
- C. Upon exit

1.
$$x = 20925725.863 \times Convert earth radii to feet$$

$$y = 20925725.863 y$$

$$z = 20925725.863 z$$

2.
$$\dot{x} = 25935.85859142 \dot{x}$$
 Convert earth radii/kemin to feet/second

$$\dot{y} = 25935.85859142 \dot{y}$$

$$\dot{z} = 25935.85859142 \, \dot{z}$$

3. $t_{\text{day of month}} = [t_0] - t_{\text{mo}}$ $t_{\text{hour}} = (t_0 - [t_0]) 24 + .5$ $t_{\text{secs}} = (t_{\text{day of month}} + t_0 - [t_0]) 86400$

Output: Satellite No., Sunnyvale sat. no., element no., $t_{\rm day\ of\ month},\ t_{\rm hour},\ t_{\rm secs},\ N_{\rm o},\ x,y,z,\dot{x},\dot{y},\dot{z}$

* [to] = Integer value of to

4.	7	Glossary


Location	Symbol	Meaning
ADDCON		Parity indicator
ΑŌ	a	Semi-major axis at to
AXNO	a xn	axn components in orbit plane
AYNO	a yn	a _{yn} at to of a
BODY	y 11	Intermediate buffer used when output quantities converted to Baudot
С	C''	Drag coefficient
CIR		Constant = $360 (2\pi \text{ in degrees})$
CON		Constant = .05862947
COSI	cos i	Cosine of inclination
CTERM		Array of rate of change of period
DATA		31 word output buffer for data in Baudot code
DTR		Constant = .017453292519 (degrees to radians)
E	е	Eccentricity
EE		Array of eccentricities
ELAPS		Seconds in month of epoch revolution number
EO	e _{0.2}	Eccentricity at t
EOSQ, ESC	⊋ e ²	Eccentricity squared
EXPON		Exponent of floating point number
FLNU		Floating point number
FORDE		Alphanumeric E, column 80 in 7 card element sets
FPS		Constant = 25935.85859142 (earth radii/kemin to feet/sec)
FT		Time of epoch in fractional days
HEADER		Table containing heading for paper tape output
ID		Element card number
\mathbf{IEL}		Element number
IHOUR		Hour of epoch
ILE		Array of element numbers from request cards
IR		Epoch revolution number
ISA T		Satellite number
ISTC		Sunnyvale satellite number
IT		Time of epoch in integer days

	J		Index equals number of element sets matched with request card satellite number
	JTI		Input tape
	JTO		Output tape
	LAPD		Day of month of epoch
	MANTIS		Mantissa of floating point number on conversion to Baudot
	МО		Array of total numbers of days since first of year by month
	MON, MONT	`H	Month of epoch
	N		Index equals number of request cards with elements available
	NAT		Satellite number
	NA TNO		Array of satellite numbers from request cards
	N3PIO2		Constant - $3\pi/2$
	NSTC		Year of launch from request cards
	NSTCNO		Array of years of launch, from request cards
	NUMBODO		Table of Baudot code for digits
	P P72	P (P _n) ^{7/2}	Nodal period at epoch - F _n P _n 7/2
	PA	` n'	Array of nodal periods at epoch in days
	PDT	С	C-rate of change of period in days/rev
	PDOT		Binary Baudot rate of change of period
	PI	π	Constant = π
	PI2	2π	Constant = 2π
	PIOV2	π/2	Constant = $\pi/2$
	PTSIX	q _o	Perigee distance
	QQ	-0	Array of perigee distances
	RAN		Array of right ascensions
	REV	N	Epoch revolution number
	REVE		Array of epoch revolution numbers
	REVNO		Binary Baudot epoch revolution number
•	RIN		Constant = 20925725.863 (earth radii to feet)
	SAVĖ		Temporary to save contents of XRl and XR2
	SAVI		Temporary to save contents of XR3 and XR4

SECPOC		Time of epoch in binary Baudot code seconds in month
SET		Switch set to indicate which half paper tape output buffer used
SINI	sin i	Sine of inclination
SIND	s i n μ	Sine of argument of latitude
SOURCE		Country of origin of satellite from request card
SOURCEA		Array of countries of orgin
SMAN		Sign of floating point number
SNAME		Name of satellite from request card
SNAMEA		Array of names of satellite
SYMBNUM		Table of digits which yield visual symbols when punched on paper tape
T		Time interval in minutes since time of epoch
TA	i	Inclination
TAE		Array of inclinations
TAPEOUT		128 word holding buffer for paper tape output
TEMP		Table of TTY functions
TENM6		Constant = 10^{-6}
TIM		Array of epoch times
TIME	t _o	Time of epoch in day of year
TWOPI	Ü	Constant = 2π
w	ω	Argument of perigee in radians
WDOT	ယ်	First derivative of argument of perigee
WN	• ·•	Array of arguments of perigee
wz	cos i	Cosine of inclination
x	x	x-coordinate of r
X 1		Binary Baudot x-coordinate of r
X2		Binary Baudot x-velocity component
X23SAV		Temporary to save contents of XR2 and XR3
X4SAV		Temporary to save contents of XR4
XDOT	×	x-velocity component of r
XJGRCF		Constant = 1.20717×10^{-2}
XKE		Constant - $k_e = .0743674$
XLO	$\lambda_{\mathbf{m}}$	Mean longitude at to in radians
XM3O2	***	Constant = $3/2$


XM4CO3		Constant = $4C/3$
XMZ	sin i	Sine of inclination
XNO		Mean angular motion at t
XNODEO		Right ascension in radians
Y	у	y-coordinate of r
Y 1		Binary Baudot y-coordinate of <u>r</u>
Y2		Binary Baudot y-velocity component
YDOT	y y	y-velocity component of <u>r</u>
Z	z	z-coordinate of <u>r</u>
Zi		Binary Baudot z-coordinate of r
Z 2		Binary Baudot z-velocity component of r
ZDOT	ż	z-velocity component of r

Other terms may be found in description of the subroutine XYZSB.

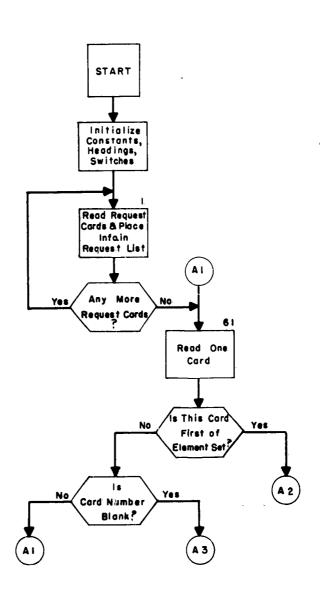


KEY:

- $\begin{pmatrix} A2 \end{pmatrix}$ Read the Remainder of the Element Set
- (A3) Begin Computations

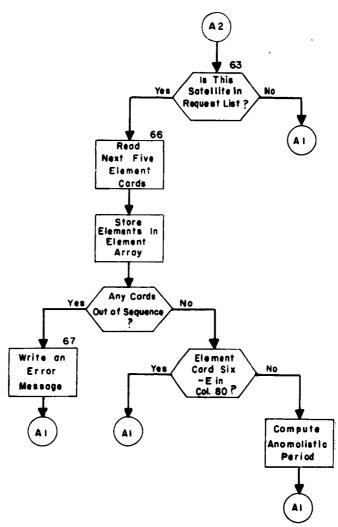


KEY: Returns to Element Card Read




KEY:

Continues with Teletype Conversions

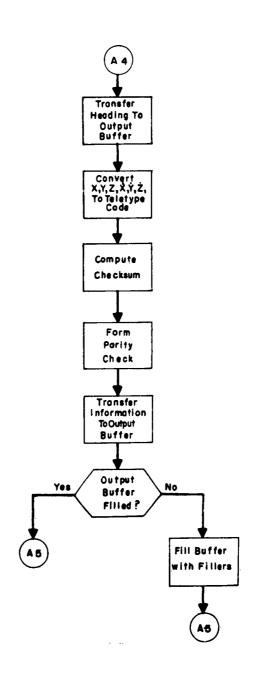

KEY: Continues

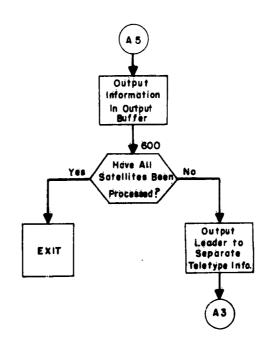

KEY:

A 3

Returns to Compute Next Satellite

5.1 CCOE, Cartesian Coordinates From Orbital Elements

5.2 Function

From a given element set, this program calculates the Cartesian coordinates x, y, z and the components of velocity $\frac{dx}{dt}$, $\frac{dy}{dt}$, $\frac{dz}{dt}$ of a satellite for a specified length of time at given intervals. The output can be expressed either in kilometers and kilometers per second, or in earth radii and earth radii per minute.

5.3 Input

The data deck is comprised of: 1) a standard 6 or 7 card element set, 2) as many request cards as needed and, 3) a blank card. This sequence is repeated for all satellites requiring this computation. The final sequence should be followed by a second blank card to terminate the program.

The following information should be punched on the request card:

cols. 1 - 10	Time start (in days)
cols. 11 - 20	Time step (in days)
cols. 21 - 30	Time stop (in days)
col. 31	Blank - output in kms.

1 - output in earth radii

Decimal points may be punched anywhere in each of the first three fields.

5.4 Output

The output consists of Cartesian coordinates and their related components of velocity for the time increments requested. The dimensions given are in kilometers and kilometers per second, or earth radii and earth radii per minute, depending on the output option chosen. The sentinels required by the TELTYP program are included so that conversion to teletype tape is possible.

5.5 Processing

After reading a standard six or seven card element set and a request card, the variables x, y, z, x, y, and z are calculated and printed according to the specified output option. The time is incremented by the time step specified on the request card. Unless the stop time has been exceeded, the program computes new variables for the incremented time.

When the stop time specified on a request card has been exceeded, the program assumes that the next card is a request card for the same satellite for another time interval. If the card is blank, the program returns to the element read section for another standard element set. A return to the executive routine is made, if a second blank is encountered. Otherwise the requests for the new satellite are processed as above.

5.5.1 Error Messages

- 1. NEGATIVE NODAL PERIOD, SATNO ____. Reading continues until next case is found
- ELEMENT CARDS OUT OF ORDER. Same procedure as 2. under (1)
- MISSING NODAL PERIOD. Continues processing that case. 3. Pa is used for Pn.
- SUBROUTINE ERROR EXIT FROM OCTAL___ 4. Subroutine or irrecoverable input output error. Exits to system if GO option taken. The message will be repeated if the STOP option is used. A dump should be given if the computer is in a non-interruptable mode of operation.

5.6

$$\frac{\text{Formulation}}{1. \quad P_{a} = \frac{360 P_{o}}{360 - P_{o} \&}}$$

2.
$$a_0 = \left[\frac{P_a}{.058672947} \right]$$

3.
$$t = T_I - t_0$$

4.
$$xx = \frac{t}{P_0}$$

N = Integer part of xx

$$\mathbf{6.} \qquad \mathbf{t_1} = \mathbf{t} - \mathbf{t_0}$$

7.
$$\Omega(t) = \Omega_0 + \dot{\Omega}_0 t_1 + \frac{1}{2} \dot{\Omega}_0 t_1^2$$

8.
$$\omega(t) = \omega_0 + \dot{\omega}_0 t_1 + \frac{1}{2} \dot{\omega}_0 t_1^2$$

9.
$$t_n(N) = T_0 + P_0N + cN^2 + dN^3$$

10.
$$P_n(N) = P_0 + 2 cN + 3 dN^2$$

11.
$$P_a(N) = \frac{360 P_n(N)}{360 - P_n(N) \omega}$$

12.
$$a(N) = \left[\frac{P_a(N)}{.058672947}\right]^{2/3}$$

13.
$$e(N) = 1 - \frac{a_0}{a(N)} (1 - e_0)$$

14.
$$E_n = 2 \tan^{-1} \left[\sqrt{\frac{1 - e(N)}{1 + e(N)}} \tan \left(\frac{\omega(t)}{2} \right) \right] \quad 0 \le E_n < 2\pi$$

15. Is
$$(t - t_{\omega}(N)) < 0$$
?

16. If
$$(P_a(N) - (t - t_{\omega}(N))) \le 0$$
 If $(P_a(N) - (t - t_{\omega}(N))) > 0$

$$N = N + 1$$
 Go to 17
Go to 9

17.
$$M(t) = \frac{2\pi}{P_2(N)} \cdot (t - t_{\omega}(N))$$

18.
$$\mathbf{E}'(t) = \mathbf{M}(t)$$

19. E (t) = M(t) +
$$e(N) \cdot \sin(E'(t))$$

20. Is
$$|E(t) - E'(t)| \ge 10^{-7}$$

21. Calculates sines and cosines of Ω , ω , i

22.
$$a_x = a(N) (\cos \omega \cdot \cos \Omega - \sin \omega \cdot \sin \Omega \cdot \cos i)$$

23.
$$a_V = a(N) (\cos \omega \cdot \sin \Omega + \sin \omega \cdot \cos \Omega \cdot \cos i)$$

24.
$$a_z = a(N) \cdot \sin \omega \cdot \sin i$$

25.
$$b_{x} = -a(N) \sqrt{1 - e^{2}(N) (\sin \omega \cdot \cos \Omega + \cos \omega \cdot \sin \Omega \cdot \cos i)}$$

26.
$$b_y = a(N) \sqrt{1 - e^2(N)} (-\sin \omega \cdot \sin \Omega + \cos \omega \cdot \cos \Omega \cdot \cos i)$$

27.
$$b_z = a(N) \sqrt{1 - e^2(N)} \cos \omega$$
. sin i

28.
$$c_1 = \cos(E(t)) - e(N)$$

29.
$$c_2 = \sin(E(t)) - e(N)$$

30.
$$c_3 = \frac{-2\pi}{Pa(N)} \cdot \sin(E(t))$$

$$\frac{1 - e(N) \cdot \cos(E(t))}{}$$

31.
$$c_4 = \frac{2\pi}{Pa(N)} \cdot \cos(E(t))$$

$$1 - e(N) \cdot \cos(E(t))$$

32.
$$x = 6378.174 (C_1 a_x + C_2 b_x)$$

33.
$$y = 6378.174 (C_1 a_y + C_2 b_y)$$

34.
$$z = 6378.174 (C_1 a_z + C_2 b_z)$$

35.
$$\dot{x} = .07382146 (C_3 a_x + C_4 b_x)$$

36.
$$\dot{y} = .07382146 (C_3 a_y + C_4 b_y)$$

37.
$$\dot{z} = .07382146 (C_3 a_z + C_4 b_z)$$

38.
$$t = t + \Delta t$$

39. $t > T_F$?


No: Go to 6


Yes: Return for next case

5.7	Glossary	
Location	Symbol	Meaning
Α		Semi-major axis (on 7 card element sets only)
AMT	M(t)	Mean anomaly at time t
AN	a(N)	Semi-major axis at revolution N
AO	a _o	Semi-major axis at epoch
C2 PI	•	2 · PI
CGT	cosω	Cosine of argument of perigee
CHT	$\cos (\Omega(t))$	Cosine of right ascension at time t
CI	cos i	Cosine of inclination
СО	c	Rate of change of period
CSPTRK		Nodal c term ()
DELT	$\mathbf{t_1}$	Time from epoch
DN	-	Number of complete revolutions from epoch


EAA E(t) Approximation to eccentric anomaly EAG E _n Eccentric anomaly of ascending node EAT E(t) Eccentric anomaly at time t EN e(N) Eccentricity at revolution N EO e _O Eccentricity ET t _O Epoch time GDOT ω First derivative of argument of perigee GO ω _O Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ω _O Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card Satellite number 1, Output in earth radii and earth radii/min. O, Output in kilometers and kilometers/sec. Input tape number, 1 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period of epoch PAN Pa(N) Nodal period for revolution N PI π, (3.1415926536) PNN P _n (N) Nodal period of epoch (if 7 card element set) PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage Sine of argument of perigee	DO	c .	First derivative of rate of change of period
EAT E(t) Eccentric anomaly at time t EN e(N) Eccentricity at revolution N EO e ₀ Eccentricity ET t ₀ Epoch time GDOT ω First derivative of argument of perigee GO ω ₀ Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of Argument of perigee HHDDOT Ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ω ₀ Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. MAGOUT Output tape number, 0 Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN P _n (N) Nodal period of epoch (if 7 card element set) PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	EAA .	E(t)	Approximation to eccentric anomaly
EAT E(t) Eccentric anomaly at time t EN e(N) Eccentricity at revolution N EO e ₀ Eccentricity ET t ₀ Epoch time GDOT ω First derivative of argument of perigee GO ω ₀ Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ω ₀ Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card Satellite number 1, Output in earth radii and earth radii/min. O, Output in kilometers and kilometers/sec. MAGIN Input tape number, 1 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN P _n (N) Nodal period for revolution N PNODL P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	EAG	En	Eccentric anomaly of ascending node
EO e ₀ Eccentricity ET t ₀ Epoch time GDOT ω First derivative of argument of perigee GO ω ₀ Argument of perigee GT ω(t) Argument of perigee at time t HDOT ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT ω Second derivative of right ascension HO ω ₀ Right ascension of ascending node HT ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM 0, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN P _n (N) Nodal period for revolution N PNODL P _n Nodal period of epoch RHO F7.29578 ROOT Temporary storage	EAT		Eccentric anomaly at time t
ET to Epoch time GDOT ω First derivative of argument of perigee GO ω Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ω Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. O, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 MAGOUT Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name NAME 2 PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 ROOT Temporary storage	EN	e(N)	Eccentricity at revolution N
ET to Co Epoch time GDOT ω First derivative of argument of perigee GO ωo Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ωo Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number I, Output in earth radii and earth radii/min. O, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch RHO PO Pn Nodal period of epoch Temporary storage	EO	e	Eccentricity
GO ω _O Argument of perigee GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of Argument of perigee HHDDOT Ω Second derivative of right ascension HO Ω _O Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number Golumn 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM O, Output in kilometers and kilometers/sec. MAGIN Input tape number, 1 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN Pn(N) Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 Temporary storage	ET	_	Epoch time
GT ω(t) Argument of perigee at time t HDOT Ω First derivative of right ascension HGDDOT ω Second derivative of right ascension HHDDOT Ω Second derivative of right ascension HO Ω Right ascension of ascending node HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM 0, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57. 29578 Temporary storage	GDOT	ω̈	First derivative of argument of perigee
HDOTΩFirst derivative of right ascensionHGDDOTωSecond derivative of Argument of perigeeHHDDOTΩSecond derivative of right ascensionHOΩoRight ascension of ascending nodeHTΩ(t)Right ascension at time tIDNNNumber of complete revolutions from epochIELNOElement numberIFORDColumn 80 on fifth element cardISATNOSatellite numberKM0, Output in earth radii and earth radii/min.KM0, Output in kilometers and kilometers/sec.MAGINInput tape number, 0MAGOUTOutput tape number, 11NAME 1First six characters of satellite nameNAME 2Second six characters of satellite namePAEPaAnomalistic period of epochPANPa(N)Anomalistic period for revolution NPIπ, (3.1415926536)PNNPn(N)Nodal period of epoch (if 7 card element set)POPnNodal period of epochRHO57.29578Temporary storage	GO	$\omega_{\mathbf{Q}}$	Argument of perigee
HGDDOT HGDDOT HGDDOT Second derivative of Argument of perigee HHDDOT Ro Right ascension of ascending node HT Ro(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM O, Output in kilometers and kilometers/sec. Input tape number, 0 MAGOUT Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 Temporary storage	GT	ω (t)	Argument of perigee at time t
HHDDOT \(\Omega_0 \) Right ascension of ascending node HT \(\Omega_0 \) Right ascension at time t IDN \(\Omega_1 \) Number of complete revolutions from epoch IELNO IELNO IELNO ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM Output in kilometers and kilometers/sec. MAGIN MAGOUT NAME 1 NAME 1 NAME 2 PAE PA Anomalistic period of epoch PAN Pa(N) Pn(N) Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO F7. 29578 Temporary storage	HDOT	$\dot{\Omega}$	First derivative of right ascension
HO \(\Omega_0 \) Right ascension of ascending node \(\text{HT} \) \(\Omega_1(t) \) Right ascension at time t \(\text{IDN} \) N \(\text{Number of complete revolutions from epoch } \) IELNO \(\text{Element number} \) Column 80 on fifth element card \(\text{ISATNO} \) Satellite number \(\text{1, Output in earth radii and earth radii/min.} \) KM \(\text{0, Output in kilometers and kilometers/sec.} \) MAGIN \(\text{Input tape number, 0} \) Output tape number, 0 \(\text{Output tape number, 11} \) NAME 1 \(\text{First six characters of satellite name} \) NAME 2 \(\text{Second six characters of satellite name} \) PAE \(\text{Pa} \) Anomalistic period of epoch \(\text{PAN} \) Pa(N) \(\text{Anomalistic period for revolution N} \) PI \(\text{\pi, (3.1415926536)} \) PNN \(\text{Pa}_n(N) \) Nodal period of epoch (if 7 card element set) \(\text{PO} \) Po \(\text{Pn} \) Nodal period of epoch (if 7 card element set) \(\text{PO} \) PO \(\text{Pn} \) Nodal period of epoch (if 7 card element set) \(\text{Temporary storage} \)	HGDDOT	<u></u>	Second derivative of Argumentof perigee
HT Ω(t) Right ascension at time t IDN N Number of complete revolutions from epoch IELNO Element number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM 0, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 Temporary storage	HHDDOT	Ω	Second derivative of right ascension
IDN Number of complete revolutions from epoch Elenot number IFORD Column 80 on fifth element card ISATNO Satellite number 1, Output in earth radii and earth radii/min. KM 0, Output in kilometers and kilometers/sec. MAGIN Input tape number, 0 MAGOUT Output tape number, 11 NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI	но	Ω_{O}	Right ascension of ascending node
IELNO IFORD Column 80 on fifth element card Satellite number 1, Output in earth radii and earth radii/min. KM 0, Output in kilometers and kilometers/sec. MAGIN MAGOUT NAME 1 NAME 1 First six characters of satellite name NAME 2 PAE PA Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI T, (3. 1415926536) PNN PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO ROOT Temporary storage	нт	Ω(t)	Right ascension at time t
IFORD ISATNO Satellite number 1, Output in earth radii and earth radii/min. 0, Output in kilometers and kilometers/sec. MAGIN MAGOUT NAME 1 NAME 2 PAE PA Pa(N) Pa(N) Pn(N) Pn(N) PnODL Pn Nodal period of epoch Pho Temporary storage	IDN	N	Number of complete revolutions from epoch
ISATNO Satellite number 1, Output in earth radii and earth radii/min. 0, Output in kilometers and kilometers/sec. MAGIN MAGOUT NAME 1 NAME 2 PAE PA Anomalistic period of epoch PAN Pa(N) PI PNN Pn(N) Pn(N) Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO ROOT Satellite number 1, Output in kilometers and kilometers/sec. Input tape number, 0 Output tape number, 11 First six characters of satellite name Second six characters of satellite name Anomalistic period of epoch Nodal period for revolution N Nodal period for revolution N Nodal period of epoch (if 7 card element set) Nodal period of epoch Temporary storage	IELNO		Element number
1, Output in earth radii and earth radii/min. 0, Output in kilometers and kilometers/sec. MAGIN MAGOUT NAME 1 NAME 2 PAE PA Anomalistic period of epoch PAN Pa(N) PI T, (3.1415926536) PNN PNODL Pn Nodal period of epoch (if 7 card element set) PO Ph Nodal period of epoch RHO ROOT 1, Output in earth radii and earth radii/min. 0, Output in kilometers and kilometers/sec. Input tape number, 0 Output tape number, 1 First six characters of satellite name Second six characters of satellite name Anomalistic period of epoch Nodal period of epoch (if 7 card element set) Nodal period of epoch Temporary storage	IFORD		Column 80 on fifth element card
MAGIN MAGOUT NAME 1 NAME 2 PAE PAN PA(N) PNODL PNODL PO PO PO RHO COUTPUT in kilometers and kilometers/sec. Input tape number, 0 Output tape number, 11 First six characters of satellite name Second six characters of satellite name Anomalistic period of epoch Anomalistic period for revolution N m, (3.1415926536) PNN Po Po Po Po Nodal period of epoch (if 7 card element set) PO Temporary storage	ISATNO		Satellite number
MAGIN Input tape number, 0 MAGOUT NAME 1 NAME 2 PAE PA Anomalistic period of epoch PAN PI PI PI PI NOdal period of epoch (if 7 card element set) PO Ph RHO ROOT Nodal period of epoch Temporary storage			1, Output in earth radii and earth radii/min.
MAGOUT NAME 1 First six characters of satellite name NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 ROOT Temporary storage	KM		0, Output in kilometers and kilometers/sec.
NAME 1 NAME 2 Second six characters of satellite name PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3. 1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57. 29578 ROOT Temporary storage	MAGIN		Input tape number, 0
NAME 2 PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N pi m, (3.1415926536) PNN Pn(N) Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO RHO Temporary storage	MAGOUT		Output tape number, 11
PAE Pa Anomalistic period of epoch PAN Pa(N) Anomalistic period for revolution N PI π, (3.1415926536) PNN Pn(N) Nodal period for revolution N PNODL Pn Nodal period of epoch (if 7 card element set) PO Pn Nodal period of epoch RHO 57.29578 ROOT Temporary storage	NAME 1		First six characters of satellite name
PAN $P_a(N)$ Anomalistic period for revolution N PI π , (3. 1415926536) PNN $P_n(N)$ Nodal period for revolution N PNODL P_n Nodal period of epoch (if 7 card element set) PO P_n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	NAME 2		Second six characters of satellite name
PI π, (3.1415926536) PNN P _n (N) Nodal period for revolution N PNODL P _n Nodal period of epoch (if 7 card element set) PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	PAE	P_a	Anomalistic period of epoch
PNN P _n (N) Nodal period for revolution N PNODL P _n Nodal period of epoch (if 7 card element set) PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	PAN	$P_a(N)$	Anomalistic period for revolution N
PNODL P _n Nodal period of epoch (if 7 card element set) PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	PI		π, (3.1415926536)
PO P _n Nodal period of epoch RHO 57.29578 ROOT Temporary storage	PNN	P _n (N)	Nodal period for revolution N
RHO 57.29578 ROOT Temporary storage	PNODL	P_n	Nodal period of epoch (if 7 card element set)
RHO 57.29578 ROOT Temporary storage	PO	Pn	Nodal period of epoch
	RHO	**	57.29578
SGT sin Sine of argument of perigee	ROOT		Temporary storage
<u> </u>	SGT	$\sin\omega$	Sine of argument of perigee
SHT $\cos(\Omega(t))$ Sine of right ascension at time t	SHT	$\cos\left(\Omega^{-}(t)\right)$	Sine of right ascension at time t

SI	Sin i	Sine of inclination
T	$\mathbf{T}_{\mathbf{I}}$	Initial time in days
TA	i	Inclination
TANN	$t_{\omega}(N)$	Time of perigee passage of revolution N
TNN	$\mathbf{t_n}(\mathbf{N})$	Time of nodal crossing for revolution N
TSTOP	$\mathtt{T}_{\mathbf{F}}$	Final time in days
×	×	x component of position vector of satellite
xx		Revolutions from epoch
XDOT	dx dt	x component of velocity
Y	y	y component of position vector of satellite
YDOT	dy dt	y component of velocity
Z	z	z component of position vector of satellite
ZDOT	$\frac{dz}{dt}$	z component of velocity

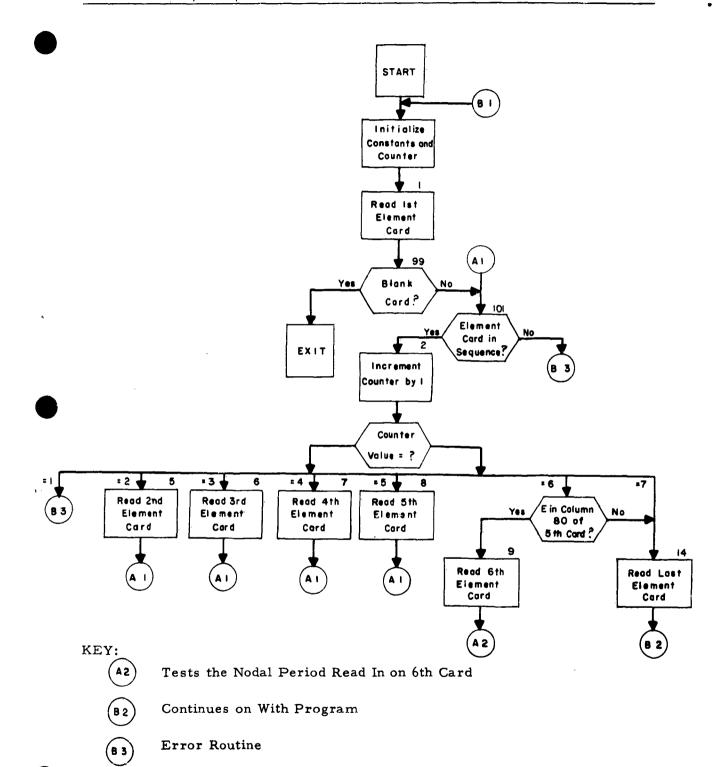

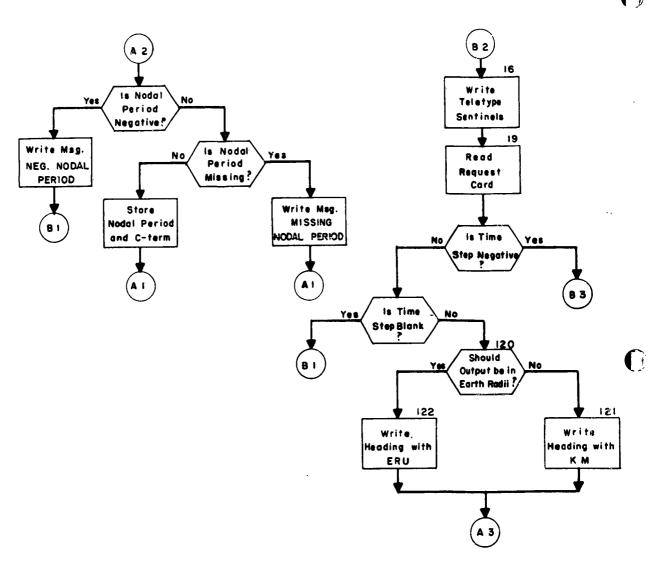


- KEY: Read 7th Card of Element Set
 - (8) Initialize to Read in Next Element Set
 - (A3) Continues on With Program
 - B 3 Error Routine

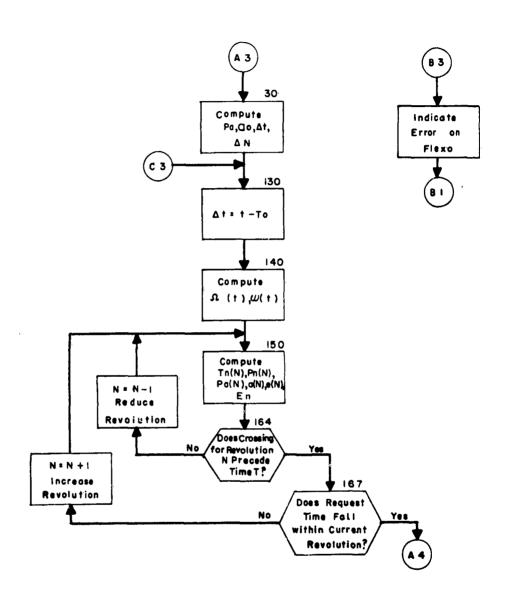


Initialize to Read in Next Element Set

(A.4) Continues With Program

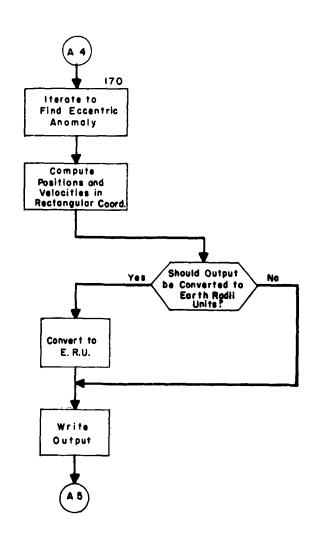

(A 5) Continues With Program

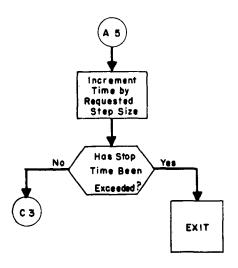


(c3) Returns to Compute Next Set of Co-ordinates

6.1 RESPLT, Residual Plot

6.2 Function

RESPLT reduces observations against the N, M element sets and produces punched card output which can be used on the EAI Data Plotter. The residuals which can be plotted are: (1) the difference in time between the predicted and observed positions versus the revolution and, (2) the vector magnitude difference versus the revolution.

The plots are especially useful as an aid in the analysis of element sets. Large residuals may indicate that the current element sets need updating or that a piece has broken off the satellite. Maneuvers, not otherwise easily detected, may be revealed when these residuals are presented graphic form (cf. Fig. 6.2).

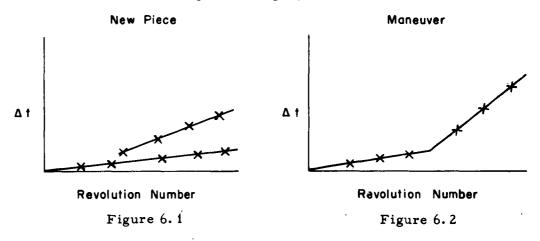

6.3 Input

The program requires observation data to be entered as card input. Element data and sensor data may be entered as card input or read from the SEAI tape.

The observations must be obtained from standard observation cards which have previously been sorted by satellite number. These

cards must have an association status punched in column 80 (cf. Fig. 6.6). If untagged observations (satellite number = zero) are to be reduced against a particular element set, a standard observation card containing the number of the desired element set and a blank sensor number should be placed in the observation deck preceding the untagged observations. The number of observation cards allowed is limited only by the space allocated to OBLOC.

There are six input options which may be specified on the SPSJOB card. Each option specifies the source of the sensor and element data, i. e., input cards or SEAI tape.

Option	Observation	Element	Sensor
0	Ob. Cards	SEAI Tape	SEAI Tape
1	Ob. Cards	Element Cards	SEAI Tape
2	Ob. Cards	Element Number Cards	SEAI Tape
3	Ob. Cards	SEAI Tape	Sensor Cards
4	Ob. Cards	Element Cards	Sensor Cards
5	Ob. Cards	Element Number Cards	Sensor Cards

Fig. 6.3

Element data may be obtained from standard 7 card element sets with an E in column 80. Since the executive routine reads the element sets into EBLOC, the number of element sets is limited by the size of that block. Element data may be obtained from the SEAI tape if element sets are not included in the input deck.

Sensor data may be obtained from standard sensor cards with an S in column 80. The number is restricted only by the size of SBLOC. Sensor data may be obtained from the SEAI tape if no sensor cards are included in the input deck.

6.4 Output

Printed output consists of the reduced observations sorted by revolution number within a satellite number in groups of 100. A heading line, which describes the output quantities in the columns below, is printed for each satellite. The satellite number, observation number, revolution number, time in minutes since epoch, vector magnitude in kilometers, number of revolutions since epoch, element number, association indicator, and station number are printed for every revolution number.

The punched card output can be used to plot residuals on the EAI Data Plotter using $K + E 10 \times 10$ cm. graph paper. The pen command for the Data Plotter is contained in column 55. The data deck is divided up as follows:

- 1) A card with a command to stop the plotter (7 in col. 55).

 The operator can set the origin at this time.
- 2) A set of cards which will enable the plotter to draw the x and y axes (6 cards).
- A card which will stop the plotter so that the above can be tried again if necessary.
- A set of cards which will plot the visual characters S, E, R, T and the information required to identify the plots. S will be followed by the satellite number, E will be followed by the element number, R will be followed by the epoch revolution number, and T will be followed by the the time of epoch in days.
- 5) A card which will stop the plotter (7 in col. 55).
- 6) The data cards containing the residual information to be plotted. There is one card for each line of printed output.

IBM 523 Summary Punch

		1	2	3	•	5	•	7	8	9	10	11	12	13	14	15	16	17	18	19	20
١	Γ	0	0	0	0	- 5	0	•	REPR	ODU	CINC	3	BRUS	HES	0	- 15 O	0	2	0	0	-20
		0	0	0	0	25 O	0	0	0	0	30 O	0	0	0	0	35 O	0	0	0	0	40
				0	0	45 O	0	0	0	0	50 O	0	0	0	0	55 O	0	0	0	0	60
c	1	0	0			65					70					75					80
D	Ĺ	0 -1 —	o − D.	P. 8					TION		-10 -10	<u> </u>	cor		<u> </u>	0 11-			SPLIT		
E		0	0	0	0	15	0	0	0	0	20	0	0	0		o •	9	0	0	0	$^{\circ}$
F		0 -9	0 -8	0	0 - G .	O P. E	O MITT	O ER —	0	0 1		0	Q 2	3	4	o co	O M	7	8	9	0
G	١	0 -11 —	0 12 1	O D.P	0	○ — R	0	0 -RD-	о р	х -	-PD	0	0	0	0	O	0	0	0	0	١١٥
н		0	١٥	0	P	<u>-</u>	- 0	0	o —	<u></u>	0										
J	ſ	-04		o X	PU		20 20	30 30	BR	50	MX O			_							
ĸ	ſ	0	0	0	0	-5- O	0	0	0	PUNG	о (MAG	SNET O	0	0	- 15 - O	0	0	0	0	-207
		0	0	0	0	25 O	0	0	0	0	30 O	0	0	0	0	35 O	0	0	0	0	40
	١	_				45 O			0	0	50 O	0	0	0	o	55 O	0	0	0	0	60
		0	0	0	0	65	0	0			70					75					80
"	ſ	0	<u> </u>	P. X.	BR.	O — 5	•	-0 T ¹⁻	•	<u> </u>	0	0	- M .		RUS	HES-	O 10	•			-
P	1	0	٥	0	0	0 5	<u> </u>	<u> </u>	<u> </u>	O PUN	O CH	O Br.U	O ISHES	· —	<u> </u>	() — 15 -	•	-	0	0	0 -20
۰	1	0	0	0	0	O 25	9	$\overline{\sim}$	0	0	30	o	7°	0	0	O 35	0	0	0	0	0 40
R	l	0	0	0	0		°/	/ †	•	1	l.	 °	0	0	0	O 55	0	0	0	0	0
s	[0	0	0	0	45 O	4	 	þ	þ	6	0	0	0	0	7	0	0	0	0	0
7		0	0	0	0	65 O	0	/	14	[\sigma]	\mathscr{C}		0	0	0	\ o^5	0	0	0	0	. "
u	[0 :	x 0	0	— sı	ELEC O.	TOR/		6	/ .]	x d	1	x 0	0	— S E	LECT O	OR	2 –	•	•	x o
	ł	0 1	4 C	0	0	0/			Λ		ы Г	6	и О	0	1	0	0	0	0	٥	и о
İ						Ζ	X	X		- /		1	. · ·	0	/ 。	0	0	0	٥		c 0
*		R	C O P	0	Γij	1	- FIA	۲/×	,	4/ C	C.O. TRL.	0	K M	. s./	BRU	SHES	- 27-		٦ R	P	- τ
×	ı	0	x 0	<u> </u>	/ }/	<u>/°</u> /	f_{co}°	2 0 MP.	MA	3 / ° \$	ROM	O P	UNC		RUS	60 HES-	Ŷ	7 9	ļ °	x 0	- 20 j
Y		0	0	/ ⁶ /	/ ⁶ /	25	°	$ \circ $	$ ^{\circ} $	^	30	0	0	/ °	0	35	0	0	0	0	40
2		0	£.,	<i>[</i>	<i>F.</i>	- L	, %	LA.	ું	, º/o	TR	0 TO:	r. °/	(IT	O R	О М.	ه 5. اا	0 N	0	0	<u> </u>
A A		1 2	^	√ 2	B 0	1	5 4	i A	•			ВО	4	6	3 0		A 0	0	0	0	19 0
АВ		00	00	0		00	0	0	_	X	Y		P		330	0		88 0	0	0	0 2
AC		ŏ	_			0	0			S	Ş		N	NG 0	0	USHE O	·	0	0	0	_; [;
AD	1		_	_		i_		~		GN	GN		C		0	35 O	0	0	0	٥	40
AE			>			!		Ÿ			••		M	ן ס	OR S3 O	M. S	. O	- 1U		. 0	 590
		10		D 0			50			L :c o								BD 0			
AF		_ s _				 5			-cc	MPA	RIN	S E	RUS	HES-		 15 -					- 5 9
AG		0	0	0	0	O 25	0	0	0	0	30	0	Ġ	0	0	O 35	0	0	0	0	40
AH		0	0	0	0	O 45	0	0	0	0	O 50	0	0	٥	٥	O 55	0	0	0	0	60
AJ		0	0	0	0	O 65	0	0	0	0	O 70	o	0	0	0	O 75	0	0	0	0	0
AK	۱	0	0	0	0	0	0	0	0	0	0	0	0	0	0	ô	0	0	0	0	öl
	L																				

 $\Delta t(y)$ vs. $\Delta Rev(x)$

IBM 523 Summary Punch

		1	s	3	4	5	6	7	•	9	10	11	12	13	14	15	16	17	18	19	20
A	1	0	•	-		-5 -	•	0	REPR	ODL	ICÍN	G	BRU:	SHES	•	- 15 O	•	0	•	۰	-207
		0	0	0	0	25 O	0	0	0	0	30 O	0	0	0	0	35 O	0	٥	0	0	40
c						45					50					55					60
ı	1	0	0	0	0	O 65	0	. 0	0	0	0 70	0	0	0	0	0 75	0	٥	o	٥	•0
D	ו	0 -1~	° o .	P. (s Bi	. cc)L. C	O ETE	0101	<u>،</u>	O -10-	<u> </u>	cor	UMN	<u> </u>	 11-	12	<u> </u>	O SPLI1	· s —	
E		0	0	0	0	O 1 5	0	0	0	0	O 20	0	0	0	0	o •	,	0	0	0	0
F		0	0 —8—	0	∘ ~G.	O P. E	WIT.	O TER-	0	0 -1-	o	0	2	0 3	0	o co	O M	0 7	•	9	0
G	١	0 11 ~-	0 12	о — р.г	o	0	x —	O	O P	о X 	0 - PD -	0	0	0	o	0	O,	0	ō	o	اة
н		0	0	0	ዖ	-	~	0	0	<u></u>	9	Ì									
J	ſ	o-	& X— —0	l °	PU	10	- K E /	4D X	40	50	MX.	1									
ĸ	ſ	0	0	0	•	 5-	0	0	0	PUNG	СН	MAG	SNET O	's o	0	15 O	0	•	•	0	-207
١	ĺ	O	0	0	0	25	0	0	0	0	30	٥	0	0	0	35 O	0	۰	0	0	40
M		0	0	0	0	45	0	0	0	0	50	0	0	0	0	55	0	0	0	0	60
						65					70					75					80
N	ſ	<u> </u>		О Р. Х.		0 -5-	•	г ⁾ -		0	<u> </u>	0	о - м .		RUS		O 10			•	۱۰ ۰ ۱۴ -
P	ı	٥	<u> </u>	<u> </u>	•	0 - 5 -	•	0	<u> </u>	O PUN	CH	BRU	SHES	·	0	0 15	•	<u> </u>	•	<u> </u>	0 -20
٥		0	0	0	0	O 25	0	0	0	0	O 30	0	0	0	0	O 35	0	0	0	0	0
R		0	0	0	0	O 45	0	0	0	0	O 50	0	0	0	0	O 55	٥	رم	1	,	<u>,</u>
s	1	0	0	0	0	0	•	0	•	•	70	0	0	0	0	"	/	K)	K	B	0
т	1	0	0	0	0	65 O	/	8	/	9	0	0	0	0	%	12	<u>/</u>	<u>/</u> 9/	/	0	
υ		0	x o	0		O O	10k %	₹.,	10/	0,	x 0	0 :	хО	9/	2			-	0	0	x o
v	ĺ	0 1	и О	0	0	0/	/。/	Λ,	/。	0 1	۰,0	ر ہ ا			K		0	0	٥	0 1	, ,
w		0	c 0	0	0,	/。	/。	/\	۰ ۱	0 (c 0/	0	/。/	/,	{	o	0	٥	٥	0	
×	1	R O	p x O	7		/		и. х 2 О	PCH 0 3	1. c	M.	S R	_	ا <i>اجعر</i> د د		5HES - 6 0		7 0		x O	Ţ
	ſ	0	0	1	17	<u> </u>	,	MP.	1, ,		ROJE		ONC		RUS		+		L		– 20 ₁
. Y		_	1	/ /	/ /	25	-	"	X			_		/		35	0	٥		0	40
Z	-	Z	2-7	/z		OM	- 2	y G	%	; \	TR.	0		(it		M. S		1			-
^^	١	"	^ o r :		* o	<u> -</u>	5			i		B O	-=-	i o 13 }	, o 	06	^			<u> </u>	2 m
AB	!	00	8	0	0	0	8	9	0	S	Y S		P	NG		O- USHE		• 0	٥	٥	- \$ 7
AC	1	0	_		,	0	_		,		- 1		N	0	0	35	0	0	0	0	0
AO		_	3	₹	_		_	Ý		G N	G N		C	6	0	0	٥	0	0	0	0
AE	1					į			1	! !			Ď	0 5		M. S.		0	0	0 ,	90
AF	ļ	10	0 6	D _O	0		5 0	0	0.8		0.	,		0 7	3 0	0	0 81	0	0	0	- M-1
AG-		- s . o	0	0	0	<u>- 5</u>	0	0	co o	MPA O	RINC	; B	RUSI	HES	0	- 15 - O	0	•	•	0	– s j o
АН		0	0	0	0	25 O	0	0	٥	0	30 O	o	۰	٥	0	35 O	0	0	0	0	40
AJ		0	0	0	0	45	0	0	٥	0	50 O	0	0	0	0	55 O	0	0	0	0	60
Į						65					70					75					80
AK		<u> </u>	۰,٥	°	<u> </u>	٥	٥	•	٥	۰	<u> </u>	٥	°	<u> </u>	°	۰	٥	•	۰	0	٥١

VMag (y) vs $\triangle Rev(x)$

6. 4. 1 EAI Data Plotter Operating Instructions

An IBM 523 Summary Punch is used to read the punched cards for input to the plotter. Board wiring diagrams are included for each of the two possible graphs (cf. Fig. 6.4 and Fig. 6.5).

The residuals which may be plotted are data time versus data revolution and vector magnitude versus data revolution.

Coordinates and pen commands for both graphs appear on the same data cards.

Note that it is possible to plot both graphs on the same piece of graph paper by reading the data cards through the 523 Summary Punch twice. This is accomplished by reading all of the punched cards for the first graph. The axes and visible information as well as the points on the graph will be plotted. If part six (6) of the data deck is reread, the second set of the residuals may be plotted on the same graph paper.

The plotter pen color and 523 board must be changed before rereading the data cards. Two separate graphs may be produced by reading all punched cards twice and changing the graph paper and 523 board.

For the proper plotting of all data, the origin on the graph paper should be five (5) centimeters right and nine (9) centimeters up from the bottom left corner of the graph paper.

Graph scaling is as follows. The revolution number from epoch is the x-axis for both graphs. The epoch revolution number lies at x=0. Each centimeter represents 20 revolutions, so that the possible values for plotting lie in the range of -100 and + 400 revolutions. Vector magnitude in kilometers is the y-axis for one graph. Each centimeter represents 500 kilometers and the possible range of values is 0 to 4500 kilometers. Delta time in

minutes is the y-axis for the other graph. Each centimeter represents five (5) minutes and the possible range of values is -45 to +45 minutes.

6.5 Processing

The program reduces observations against element sets to obtain time and vector magnitude residuals which may be plotted against the revolution number. Up to 100 observations may be processed, one at a time. The association status is checked to determine whether the observation is an angles observation only or a radar observation.

Association Status	Observation Kind	Association Category	Will RESPLT Accept?
1	Radar	Associated	Yes
2	Radar	Doubtful	Yes
3	Radar	Unassociated	Yes
4	Angles Only	Associated	Yes
5	Angles Only	Doubtful	Yes
6	Angles Only	Unassociated	Yes
7	Range Rate	Associated	No
8	Range Rate	Unassociated	No
9	Radar	Special Unassoc.	Yes
O or A			No

Fig. 6.6

The proper year constants are obtained and time of epoch is converted to days since 1950. The observation counter is increased by one and the association indicator, observation number, and sensor number from the observation are stored for output. The sidereal time at the time of epoch is computed. The semi-latus rectum and the components of the unit vector perpendicular to the orbit plane are found to compute the inclination, the right ascension

of the ascending node, the eccentricity, and the semi-major axis at epoch.

The mean argument of latitude, the mean angular motion, a drag coefficient, and the perifocal distance are computed. The time since epoch, the sidereal time at the station, and the x, y components of the station vector are found. The subroutine XYZSB is used to compute the predicted position and velocity plus intermediate quantities.

Observation type (OTYPE) will be referred to in subsequent paragraphs as illustrated in Fig. 6.7

OTYPE	Observation Kind	Quantities From Obs. Card
1	Angles Only	Azimuth-Elevation
2	Radar	Azimuth-Elevation, Range
3	Radar	Azimuth-Elevation, Range, Range Rate
4	Radar	Azimuth-Elevation, Range Rate
5	Angles Only	Right Ascension-Declination
l	l	

Fig. 6.7

If the observation is an angles only observation, the range is computed. If OTYPE = 1, the predicted azimuth and elevation are found. If OTYPE = 5, the predicted right ascension and declination are found.

If the observation is a radar observation, the predicted range is computed. The predicted azimuth and elevation are computed.

If OTYPE = 3 or 4, the predicted range rate is computed.

For all observations, the residuals are computed to find the vector magnitude. Unless 100 observations have been processed, the program returns for the next observation.

When all of the observations have been processed for a single satellite the program generates data for punched card output for the plotter. The punched cards contain all necessary plotter control functions. Punched cards are generated to plot the axes, visual satellite, element, epoch revolution, and epoch day numbers. These cards are followed by the data cards. The program then returns to process the next group of observations.

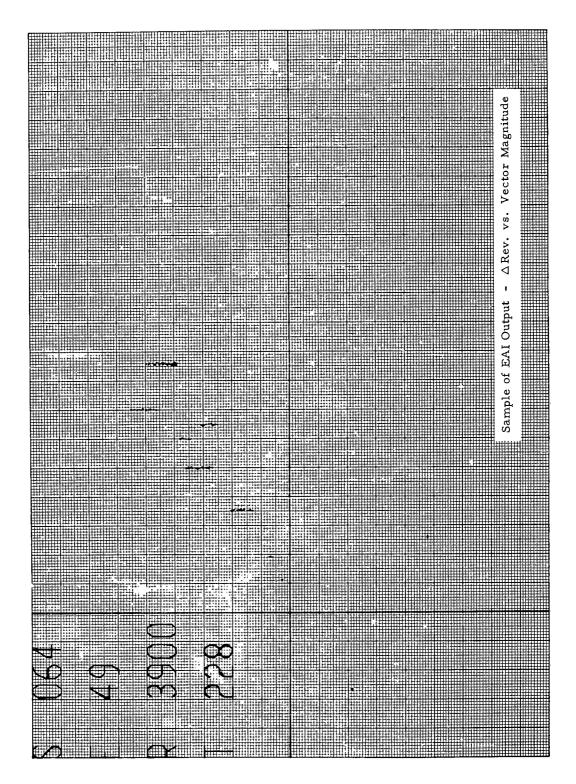


Figure 6.8

6.6 Formulation

- 1. $\theta_G = \theta_o + t_{\text{days}}$ (rotation of earth) deg/solar day
- 2. Compute semi-latus rectum.

$$p_0 = h_{xo}^2 + h_{yo}^2 + h_{zo}^2$$

3. Compute x, y, z components of \underline{W} (unit vector \bot orbit plane).

$$W_{xo} = h_{xo} / \sqrt{p_o}$$

$$W_{yo} = h_{yo} / \sqrt{p_o}$$

$$W_{zo} = h_{zo} / \sqrt{p_o}$$

4. Compute inclination.

$$i = \pi/2$$
 if $W_{-2} = 0$, otherwise;

$$i = \pi/2$$
 if $W_{zo} = 0$, otherwise;
 $i = tan^{-1} \left(\sqrt{1 - W_{zo}^2 / W_{zo}} \right)$

5. Compute right ascension of ascending node at epoch.

$$\Omega_{o} = \tan^{-1} \left[\left(\frac{W_{xo}}{\sin i} \right) / \left(-\frac{W_{yo}}{\sin i} \right) \right]$$

$$e_o = \sqrt{a_{xNo}^2 + a_{yNo}^2}$$
 $a_o = p_o/1 - e_o^2$

7. Compute mean argument of latitude and mean angular motion

$$U_o = L_o - \Omega_o$$
 if W_{zo} positive, otherwise $u_o = L_o + \Omega_o$
 $n_o = k_e/a_o^{-3/2}$

8. Compute a drag coefficient, perifocal distance, and K L ... $c'' = -c_0(n_0^2)360/\pi^2$

$$q_0 = a_0 (1 - e_0)$$

$$K_e L_{so} = \frac{K_e^{Ja} \frac{2}{e}}{\frac{7}{2}} \left[3 - 5e_o^2 - (4 - \frac{27}{4} e_o^2) \sin^2 i - (1 - \frac{3}{2} e_o^2) / \cos i \right]$$

9. Compute time since epoch and sidereal time at station.

T = (t_{obs} - t_o) 1440 + time of day in minutes since midnight.

$$\theta_{s} = \theta_{G} + \lambda + .0043752691 T$$

10. Compute observed position from the observation.

$$\overline{\underline{X}} = \cos \theta_s \, \overline{\underline{X}} / \cos \theta_s$$

$$\frac{\overline{Y}}{\underline{Y}} = \sin \theta_{s} \frac{\overline{X}}{\cos \theta_{s}}$$

Use subroutine XYZSB to compute predicted position, \underline{r} , and velocity, \underline{r} , plus intermediate quantities.

If angles only observations, go to 17.

Equations 11-16 for radar observations.

11. Compute x, y, z components obs. unit vector from observer to obj. with respect to horizon.

$$L_{xh} = -\cos Az \cosh$$

$$L_{vh} = \sin Az \cosh$$

$$L_{zh} = sinh$$

12. Compute x, y, z components S (unit vector from observer to south).

$$S_{x} = \sin \phi \cos \theta_{s}$$

$$S_v = \sin \phi \sin \theta_s$$

$$S_z = -\cos \phi$$

13. Compute x, y, z components \underline{Z} (unit vector from observer to zenith).

$$Z_{x} = \cos \phi \cos \theta_{s}$$

$$Z_{v} = \cos \phi \sin \theta_{s}$$

$$Z_z = \sin \phi$$

14. Compute x, y, z components \underline{E} (unit vector from obs. to east).

$$E_{x} = -\sin \theta_{s}$$

$$E_y = \cos \theta_s$$

$$\mathbf{E}_{z} = 0$$

15. Compute \underline{L}_{0} (obs. unit vector from obs. to object).

$$\underline{L} = L_{xh}\underline{S} + L_{yh}\underline{E} + L_{zh}\underline{Z}$$

16. Compute ob. \underline{r} , vector directed to object, and β .

$$\frac{\mathbf{r}}{\mathbf{r}} = \rho \underline{\mathbf{L}} - \underline{\mathbf{R}}$$

$$\mathbf{r} = \sqrt{\mathbf{x}^2 + \mathbf{y}^2 + \mathbf{z}^2}$$

$$\beta = \left| \sin^{-1} \left(\frac{1}{\mathbf{r}} \left(\underline{\mathbf{R}} \cdot \underline{\mathbf{W}} \right) \right) \right|$$

Go to 30.

Equations 17-29 for angles only observations.

17. Compute x, y, z components of range vector ρ.

$$\frac{\rho = \underline{r} + \underline{R}}{\rho_c} = \sqrt{\rho_x^2 + \rho_y^2 + \rho_z^2}$$

If Az-El type observation, go to 18.

If RA-Dec type observation, go to 20.

18. Compute predicted elevation.

$$L_{xh} = \frac{\rho_x \cos \theta_s \sin \phi + \rho_z \sin \theta_s \sin \phi - \rho_z \cos \phi}{\rho}$$

$$L_{yh} = \frac{-\rho_x \sin \theta_s + \rho_y \cos \theta_s}{\rho}$$

$$\mathbf{L_{zh}} = \frac{\rho_{\mathbf{x}} \cos \theta_{\mathbf{s}} \cos \phi + \rho_{\mathbf{z}} \sin \theta_{\mathbf{s}} \cos \phi + \rho_{\mathbf{z}} \sin \phi}{\rho}$$

$$h_{c} = \tan^{-1} \left(\frac{L_{zh}}{\sqrt{1 - L_{zh}^{2}}} \right)$$

19. Compute predicted azimuth.

$$Az_c = tan^{-1} \left(\frac{L_{yh}}{-L_{xh}} \right)$$

Go to 22.

20. Compute predicted right ascension.

$$\underline{L} = \underline{\rho/\rho}$$

$$a_c = \tan^{-1} \left(\frac{L_y}{L_{xx}} \right)$$

21. Compute predicted declination.

$$\delta_{c} = \tan^{-1} \left(\frac{L_{z}}{1 - L_{z}^{2}} \right)$$

Go to 27.

22. Compute x, y, z components obs. unit vector from observer to object with respect to horizon.

$$L_{xh} = \cos \delta \cos \alpha$$

$$L_{vh} = \cos \delta \sin \alpha$$

$$L_{zh} = \sin \delta$$

- 23-26. Same as equations 12-15. Go to 28.
 - 27. Compute x, y, z components \overline{L}_{0} .

$$L_{x} = \cos \delta \cos \alpha$$

$$L_{v} = \cos \delta \sin \alpha$$

$$L_z = \sin \delta$$

28. Compute observation range.

$$\rho = (X \cdot W_{xo} + Y \cdot W_{yo} + Z \cdot W_{zo}) / (L_x \cdot W_{xo} + L_y \cdot W_{yo} + L_z \cdot W_{zo})$$

29. Compute predicted range.

$$\rho_{\mathbf{c}} = \sqrt{\rho_{\mathbf{x}}^2 + \rho_{\mathbf{y}}^2 + \rho_{\mathbf{z}}^2}$$

30. Compute Δu , change in mean argument of latitude.

$$\Delta u = \tan^{-1} \left(\frac{\underline{U}}{\underline{U}_{\mathbf{x}} \cdot \underline{W}} \right)$$

31. Compute Δt .

$$\Delta t = (\Delta u R^2)/(K_0 \sqrt{p})$$

If angles only observation, go to 36.

- 32. Same as equation 17.
- 33-34. Same as equations 18-19.
 - 35. If Az-El, Range Rate Obs. (OTYPE = 4), compute predicted range rate.

$$\frac{\dot{\mathbf{x}}}{\mathbf{X}} = -\overline{\mathbf{Y}}\dot{\mathbf{\theta}}$$

$$\frac{\dot{\mathbf{x}}}{\mathbf{x}} = \mathbf{x} \dot{\theta}$$

$$\overline{Z} = 0$$

$$\dot{\rho}_{C} = \underline{L} \cdot (\dot{\rho} + \dot{R})$$

36. Compute range residual.

$$\Delta \mathbf{r} = \rho - \rho_{\mathbf{c}}$$

37. If Az-El type observation, (OTYPE \neq 5).

$$\Delta h = h - h_c$$
, $\Delta a = |Az - Az_c|$

If RA-Dec type observation, (OTYPE = 5).

$$\Delta h = \delta - \delta_c$$
, $\Delta a = |a - a_c|$

38. If $\Delta h > \pi$, $\Delta h = 2\pi - \Delta h$

If
$$\Delta \alpha > \pi$$
, $\Delta \alpha = 2 \pi - \Delta \alpha$

If angles only observation, go to 40.

39. Compute vector magnitude.

$$V_{\text{mag}} = \sqrt{\Delta r^2 + (\rho \Delta h)^2 + (\rho \Delta \alpha \cos h)^2}$$

Go to 41.

40.
$$V_{\text{mag}} = \sqrt{(\rho_c \Delta h)^2 + (\rho_c \Delta a \cos h)^2}$$

41. Compute revolution and delta revolution number.

$$N = N_0 + \frac{t_n}{2\pi}$$

$$\Delta N = \frac{t}{2\pi}$$


Process next observation.

6.7 File Definitions

Symbol	Meaning	File	Core Image
ALPHA	Azimuth in radians or right ascension	0	48 bit flt. pt. number
ASTAT	R = association indicator = 1 - 9 (BCD)	0	0 0 0 0 0 0 0 R
AXNO	a ×N	E	48 bit floating point
AYNO	a vN	E	48 bit floating point
BLEXP	Expiration of bulletin, in days since 1950.0	E	48 bit floating point
CAPZ	Z, in earth radii	s	Floating point
CFI	If other than Δ or 0, indicates that RODOT contains max. freq. shift in cyc/sec. ²	0	000000CF

			401119
CO	c, in days/rev. ²	E	48 bit floating point
CTYPE	Coordinate type for LA	S	0000000@
DAYNO	Day number (relative to 1950.0)	0	48 bit flt. pt. number
DELTA	Elevation in radians, or declination	0	48 bit flt. pt. number
ELNO	Element set no. (binary)	E	Binary integer
EFOCH	T days since 1950	E	48 bit floating point
EQTYP	CL = class. T = type of equipment	0	$\mathtt{CL} \; \Delta \; \Delta \; \Delta \; \Delta \; \Delta \; T \; T$
HXO	h _{xo}	E	48 bit floating point
НХО	h yo	E	48 bit floating point
HZO	h _{zo}	Æ	48 bit floating point
ISTOP	Inclination correction indicator	E	0000001
MSGNO	5 character message number	0	$\Delta \ \Delta \ \Delta \ M \ M \ M \ M \ M$
OALT	H, in earth radii	S	Floating point
OBRITE	Brightness in apparent magnitudes	0	Same as tape record
OBSNO	Observation number	0	ΔΔΔΧΧΧΧΧ
OTYPE	Observation type	0	0 0 0 0 0 0 0 OT
	<pre>0 = range rate only 1 = azimuth and elevation 2 = azimuth, elevation, range 3 = azimuth, elevation, range, range rate— 5 = right ascension and declination</pre>		
PHANG	C _n phase angle coeff. in degrees	E	Floating point
PHIRD	p · · · · · · · · · · · · · · · · · · ·	s	Floating point
RANGE	Slant range in earth radii	0	48 bit flt. pt. number
REVF	Final revolution number	E	Floating point
REVI	Epoch rev. no. or initial rev. no.	E	Floating point
RODOT	Range rate in earth radii/kemin	ο.	48 bit flt. pt. number
SATN	Satellite number (BCD)	E	ΔΔΔΔΔΒΒΒ
SATNM	Satellite name	E	NNNNNNN
SATNM2	Satellite name	E	ΝΝΔΔΔΔΔΔ
SATNO	Satellite number	0	ΔΔΔΔΔ S S S
SATOB	Number of observations	E	48 bit floating point

SATRM	Rms in kilometers	E	48 bit floating point
STAID	Station number	0	ΔΔΔΔΛΝΝΝ
	Station number	S	ΔΔΔΔΒΒΒ
STBRT	Standard brightness	E	Floating point
STGAR	F-sign bit on-classified	S	F @ A H p
STNM	Sensor code	S	NNNNNNN
STNM2	Sensor name (BCD)	S	NNNNNNN
STY P E	Sensor type	S	0 0 0 0 A A A
TOY	Year of T _o - 1 BCD character	E	0 0 0 0 0 0 0 Toy
UTIME	Time of day (min. since midnight)	0	48 bit flt. pt. number
XLAMBA	λ radians east	S	Floating point
XLO	L radians	\mathbf{E}	48 bit floating point
XOVCT	X/cos θ earth radii	S	Floating point

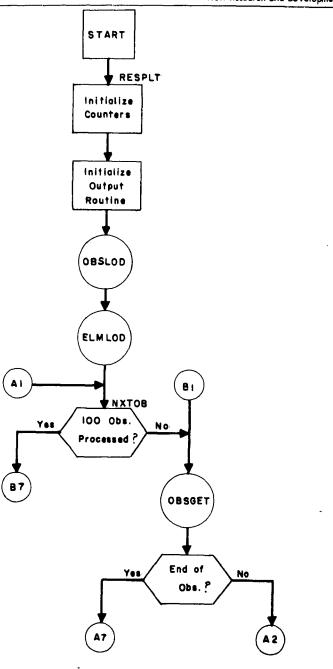

(87) Prepare Obs. for Output

Test for Sensor
Availability

Test Availability of Processed Obs.


ELMLOD

OBSLOD

Initialize to Retrieve 1st Ob. in OBLOC

Initialize to Retrieve 1st Elem. Set in EBLOC

Retrieve Next Ob. from OBLOC

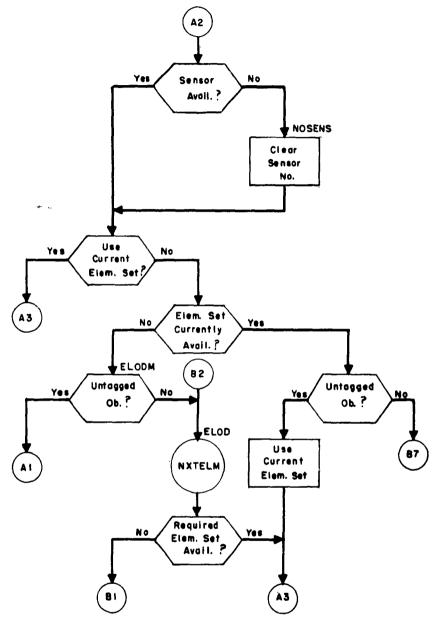


KEY:


A 1 B 1 Return to Retrieve Next Ob. B 7 Prepare Obs. for Output

Check Association Status of Ob.


Retrieve Required Elem. Set from EBLOC

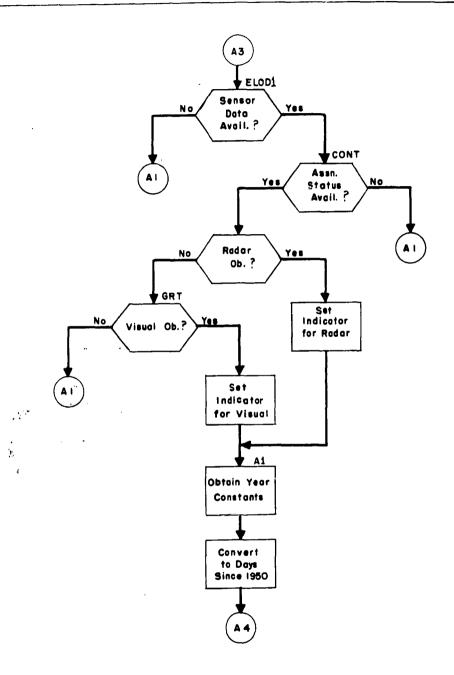

- (A) Retrieve Next Ob. from OBLOC
- (A4) Continue Computations

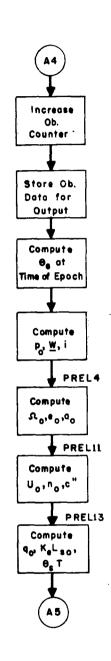


(A5) Compute x, y, z Coordinates

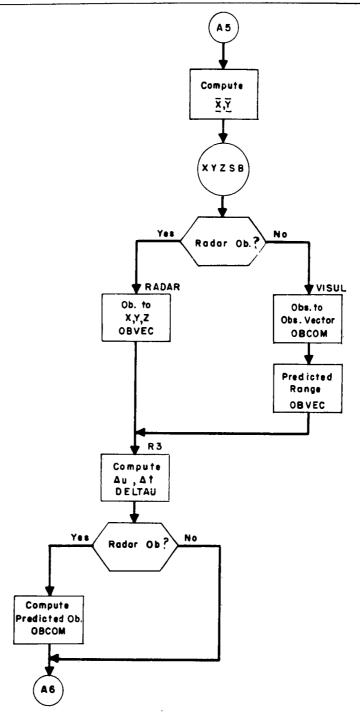

Compute and Store Residuals




Compute Predicted Position and Velocity (xr2 = 30)

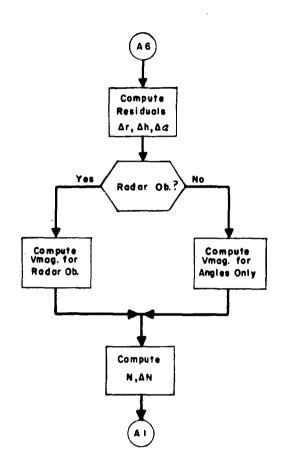


(A1) Return to Process Next Ob. in OBLOC

0

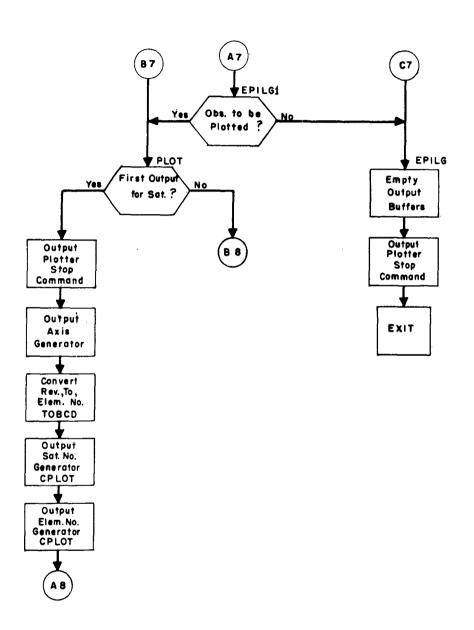


KEY:

- (A8) Continue Plot Header Generation
- (88) Begin Ob. Sort by Rev. No.

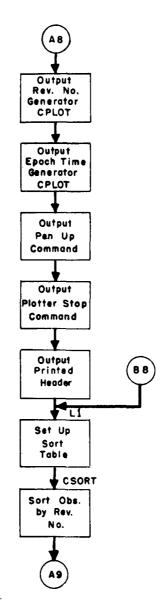

(A9) Retrieve Ob. Data from Array Storage

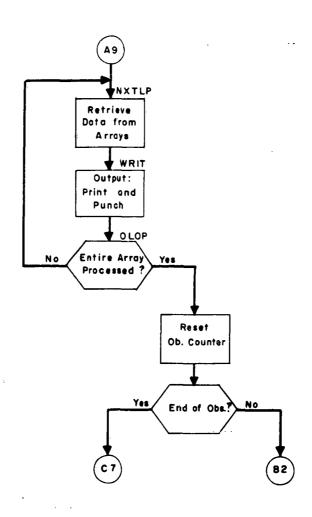

- (82) Return to Process Next Observation
- (c7) Empty Output Buffers and Exit to Exec.

7.1 PREPINT, Satellite Situation Report From Nodal Elements

7.2 Function

The purpose of PREPINT is to supply the sub-satellite point and related data of all satellites at specified times. The longitude and time at the last ascending node are also computed for each satellite.

A maximum of 500 satellites may be included in each report. However, positions will be computed only for those satellites included in the request deck (See 7.3). If any comments (such as "IN HELIOCENTRIC ORBIT") appear on the request card of a satellite, these comments are printed out and the program does not attempt to determine the sub-satellite point.

During one run of PREPINT, as many as 10 reports may be produced, one report for each time card (See 7.3). If a report time is 1200 hours, the output heading will be WEEKLY SATELLITE SITUATION REPORT. A daily report is issued at all other times but both types of report are identical other than heading.

7.3 Input

The input to PREPINT is arranged as follows: 1) request cards (≤ 500); 2) request deck terminator; 3) time cards (≤ 10); 4) time deck terminator; 5) standard 6 or 7 card element sets; and 6) element deck terminator.

(1) The request cards contain the following information:

Cols. 1-3 Satellite number

Col. 7 Comment indicator = 0 or Δ , no comments; = 1, read comments from cols. 21 - 62.

Cols. 9-20 Satellite name

Cols. 21-62 Comments to be printed on report if Col.7 contains a "1" punch. (A maximum of 50 satellites may have comments.)

All other columns on this card are not used.

- (2) The request deck is terminated by a card with a "2" punch in Col. 7
- (3) The time cards contain the times at which reports are desired. They are punched as follows:

Cols. 1-4 Year

Cols. 6-7 Month number

Col. 8 Blank

Cols. 9-10 Day of month

Cols. 11-17 Hours and minutes (HHMM·MM)

Col. 20 Output unit indicator = 0, output in statute mil

= 1, output in kilometers

All other columns are not used.

- (4) The time deck is terminated by a card with a "7" punch in Col. 8.
- (5) Both standard 6 card element sets and standard 7 card element sets may be included in the element deck.
 - (6) A blank card is used as an end of input indicator.

The ordering of the satellites on the output is determined by the order of the request deck, not by the element set order. More than 500 sets of elements may be read in since the program stores only the elements for satellites in the request deck.

7.4 Output

The heading of each satellite situation report contains the date and time for the information following it. One line of data is

printed for each satellite. If comments were read from the request card, these comments are printed out beside the satellite number.

Otherwise, the following information is printed out for each satellite:

- 1) Identifying information: satellite name and number, and element set number.
- 2) Sub-satellite point at report time: latitude and longitude west, in degrees.
- 3) Inclination, i, in degrees and nodal period, P_{N} , in minutes.
- 4) Distances to apogee and perigee in statute miles or kilometers, depending on Col. 20 of the time card.
- 5) Revolution number at report time and T_N , Ω_N , and λ_N for this revolution.
- 6) Eccentricity, e, satellite height in statute miles or kilometers.
 - 7) Satellite latitude and longitude west in tenths of a degree.

The sentinels required by the TELTYP Program are supplied to enable transmission of the above output including all information from 1) to 4).

7.5 Processing

The entire input deck is read in and the data stored in arrays before any computations are made. First, a maximum of 500 request cards are read in. The satellite identification and comments, if any, from the request deck are saved. Next, the report times and output options are read from the time cards and stored. Finally, the element deck is read in and the elements for all satellites in the request deck are stored. For all element sets which are out of order, the satellite and card numbers are printed out via the flexowriter with an appropriate message. After the element deck terminator is read in, a check is made to see if there were any

1

element sets out of order. If there were cards out of order, the program returns control to the executive program. Otherwise, computations for the first report are started.

After retrieving the first report time from the time array, the teletype sentinels and report headings are written on the output tape. Next, the first satellite number is retrieved from the request deck array. If comments appeared on the request card for this satellite, they are written on the output tape and the next satellite number is picked up from the request deck array. For satellites having no comments, the elements are retrieved from the element array for computation of the sub-satellite point at report time. First, the revolution number at report time is computed and all elements are updated to the time of the ascending node for this revolution. If the satellite has decayed prior to report time, an appropriate message is written on the output tape and the next satellite number is retrieved from the request deck array. However, if the satellite is still in orbit, the sub-satellite point at report time and other data for output are computed. The output is converted to the proper units and written on the output tape. The next satellite number is retrieved from the request deck array and the computations continue until all requested satellites have been processed.

The next report time is retrieved from the time array and the same procedure followed until reports have been completed for all requested times. The program then returns control to the executive program.

7.5.1 Error Messages

1. SATELLITE CARD OUT OF ORDER

Program continues reading entire element deck and writes this message for every card out of order. After all elements have been read in, program exits to executive routine.

2. SUBROUTINE ERROR EXIT FROM OCTAL ____

Subroutine or irrecoverable input-output error. Program exits to executive routine if the GO option is taken. If the STOP option is specified, the message is retyped. A dump should be taken if possible.

7.6 Formulation

1.
$$P_{a_0} = \frac{P_{N_0}}{1 - \frac{\dot{\omega} P_{N_0}}{2\Pi}}$$

2.
$$a_o = \left(\frac{P_{a_o}}{.058672947}\right)^{2/3}$$

3.
$$q_0 = a_0 (1 - e_0)$$

4.
$$\Delta t_{N} = P_{N_0} \Delta N + C_0 \Delta N^2 + d_0 \Delta N^3$$

5.
$$P_N = P_{N_0} + 2 C_0 \Delta N + 3 d_0 \Delta N^2$$

6.
$$C_N = C_0 + 3 d \Delta N$$

7.
$$\dot{q}_N = \dot{q}_0 + \ddot{q} \triangle t_N$$

8.
$$q_N = q_0 + \dot{q}_N \triangle t_N + \frac{1}{2} \ddot{q}_0 \triangle t_N^2$$

9.
$$\omega_{N} = \omega_{o} + \dot{\omega}_{o} \triangle t_{N} + \frac{1}{2} \dot{\omega}_{o} \triangle t_{N}^{2}$$
,

$$0 \le \omega_{\mathrm{N}} < 2\Pi$$

10.
$$\Omega_{N} = \Omega_{o} + \dot{\Omega}_{o} \triangle t_{N} + \frac{1}{2} \dot{\Omega}_{o} \triangle t_{N}^{2} ,$$

$$0 \le \Omega_{\rm N} < 2\Pi$$

11.
$$P_{a_N} = \frac{P_N}{1 - \frac{\omega_N P_N}{2\Pi}}$$

12.
$$a_N = (\frac{P_{a_N}}{.058672947})^{2/3}$$

13.
$$e_N = 1 - \frac{q_N}{a_N}$$

14.
$$\dot{\omega}_{N} = \frac{(.086917)(a_{N})^{-7/2}(5\cos^{2}i-1)}{(1-e_{N}^{2})^{2}}$$

15.
$$\dot{\Omega}_{N} = \frac{(-.17383)(a_{N})^{-7/2}(\cos i)}{(1 - e_{N}^{2})^{2}}$$

16.
$$q_N = a_N (1 - e_N)$$

17.
$$E_N = -2 \tan^{-1} \left(\sqrt{\frac{1 - e_N}{1 + e_N}} \tan \frac{\omega_N}{2} \right)$$

18.
$$M_N = E_N - e_N \sin E_N$$

19.
$$M(t) = M_N + \frac{2\Pi \cdot \triangle t}{P_N}$$

20. Solve for
$$E(t)$$
: $M(t) = E(t) - e_N \sin E(t)$

21.
$$v = 2 \tan^{-1} \left(\sqrt{\frac{1+e_N}{1-e_N}} \tan \frac{E(t)}{2} \right)$$

22.
$$\mu = v + \omega_N + \dot{\omega}_N \Delta t + \frac{1}{2} \dot{\omega}_N \Delta t^2$$

23.
$$\phi' = \sin^{-1}(\sin i \cdot \sin \mu)$$

24.
$$\phi = \tan^{-1} \left(\frac{\tan \phi'}{.99329985} \right)$$

25.
$$R_o = \frac{.9966443}{\sqrt{1 - .00670015 \cdot \cos^2 \phi}}$$

26.
$$r = \frac{a_N (1-e_N^2)}{(1+e_N)^{\cos v}}$$

27.
$$H = r - R_0$$

28.
$$\beta = \sin^{-1} \left(\frac{\cos i}{\cos \phi} \right)$$

29.
$$\Delta \lambda' = \sin^{-1} \left(\frac{\tan \phi'}{\tan i} \right)$$

30.
$$\triangle \lambda = \triangle \lambda' + \triangle t (\dot{\Omega}_N - 6.3003883) + \frac{1}{2} \ddot{\Omega}_N \triangle t^2$$

31.
$$\lambda_N = \theta_G - \Omega_N$$
, $0 \le \lambda_N < 360$

32.
$$\lambda_s = \lambda_N - \Delta \lambda$$
, $0 \le \lambda_s < 360$

Perigee =
$$(q_N - 1)$$
 K

34. Course =
$$\tan^{-1}$$

$$\frac{\frac{(107.08829)(1 + e_{N} \cos v)}{\sqrt{a_{N}(1 - e_{N}^{2})} \sin \beta - \left(\frac{6.3003883 \cos \phi' a_{N}(1 - e_{N}^{2})}{1 + e_{N} \cos v}\right)}{\frac{(107.08829)(1 + e_{N} \cos v)}{\sqrt{a_{N}(1 - e_{N}^{2})}} \cos \beta}$$

7.7 Glossary

Location	Symbol	Meaning
AA		Comment from request card
AAl		Array for storage of comments AA
ANGL		Array for storage of inclination angles (i)
ANGLE	i	Inclination angle
ANOMA	P_a	Anomalistic period in days
APOGEE	u	Apogee distance
AXIS	a	Semi-major axis
AZIB	β	Angle β , see diagram
вв		Comment from request card
BB1		Array for storage of comments BB
С	С	Rate of change of period in days/rev. 2
CA		Array for storage of c terms
CC		Comment from request card
CC1		Array for storage of comments CC
CHECK	$\sin \phi'$	Sine of geocentric latitude of subsatellite point
COURSE		Course in radians
D	d	First derivative of c in days/rev. 3
DA		Array for storage of d terms
DAE		Array for storage of epoch times (to)
DAP		Array for storage of decay times (t'_0)
DAYE	t _o	Time of epoch in days of year
DAY	_	Day of month of report
DAYN		Number of whole days in t_{N}
DAYP	t _o '	Epoch time of decay equation
DD		Comment from request card
DDl		Array for storage of comments DD
DELLOT	Δ λ'	Delta longitude of node excluding precession of node for this revolution
DELONG	Δλ	Difference in longitude from node to subsatellite point
DELTAT	$\Delta \mathbf{t}$	Time from ascending node of updated revolution to report time (treport - tn)
DELTTN	$\Delta t_{\mathbf{N}}$	Time elapsed from epoch to last ascending node prior to report time $(t_N - t_0)$

DEPOCH		Time of epoch in Smithsonian days
DTIM		Array for storage of report times in Smithsonian days
DTIME		Report time in Smithsonian days
E	e	Eccentricity
E1		Array for storage of eccentricity values (e)
EE		Comment from request card
EE1		Array for storage of comments EE
EN	${f E}_{f N}$	Eccentric anomaly at the node
EPOK		Array for storage of epoch revolution numbers (N_0)
EPOKR	No	Epoch revolution number
ERAD	· ·	$\sqrt{\frac{1-e}{1+e}}$
ES	E(t)	Eccentric anomaly at time of report
FEPOCH		Time of epoch in fractional part of day
FF		Comment from request card
FF1		Array for storage of comments FF
FRACT		In fractional part of t _M
FTIM		Array of fractional days of report times
FTIME		Fractional part of day of report
FORDC	С	Nodal c term from 7 card element set
FORDE		Column 80 of element cards (E in col. 80 indicates 7 card element set)
FORDP	$P_{N_{0}}$	Nodal period from 7 card element set
GEGL		Latitude of the subsatellite point in degrees
GEOCL	φ'	Geocentric latitude of subsatellite point
GEOGL	ф	Geodetic latitude of subsatellite point
GG		Comment from request card
GG1		Array for storage of comments GG
Н	λN	Longitude of the node
HLS	λ _S	Longitude of the subsatellite point
HT .	Н	Height of satellite above earth

PERGEE

ID Element card number **IELNO** Element number ILN Array for storage of element numbers IT Number of times at which reports are to be issued KAZ Day for which report is issued KIL Array for storage of output options KILO Output option (km or sm) for report Output option {= 1 output in statute miles **KILOM** = 0 output in kilometers MAGIN Input tape number MAGOUT Output tape number **MESS** "Out of Order" message for flexowriter MO Month number of report Ν Number of satellites requested for report Array of comment indicators = 0 no comments = 1 print comments for this satellite N1 NAT Satellite number NATNO Array for storage of satellite numbers Latitude of subsatellite point in degrees NEOGL NLS Longitude of subsatellite point in degrees NN Number of satellites having comments on request card = 0 no comments on card NO Request card switch = 1 store comments from = 2 end of request deck NREV N Revolution number at time of report NRSC Number of element sets which are out of order NYEAR Year of report NZIB .Course in degrees Array for storage of w values PEDOT PERDOT ů First derivative of argument of perigee PERI Array for storage of ω values PERIG Argument of perigee ω

Perigee distance

PERIOD		Nodal period in minutes
PNOD		Array for storage of nodal periods ($P_{ m N_0}$)
PNODL	P_{N_o}	Nodal period in days/rev.
PRDDO	O	Array for storage of $1/2$ $\ddot{\omega}$
PRDDOT	1/2 ὢ	One half 2nd derivative of argument of perigee
Q	q	Perigee distance in earth radii
QA		Array for storage of q values
QDDO		Array for storage of 1/2 q values
QDDOT	1/2 ;	Second derivative of argument of perigee
QDO		Array for storage of q values
QDOT	• q	First derivative of argument of perigee
R	ΔΝ	Revolutions since epoch
RADDO		Array for storage of $1/2~\Omega$ values
RADDOT	1/2 Ω	One half 2nd derivative of right ascension of the ascending node
RADOT		Array for storage of $\hat{\Omega}$
RASDOT	Ω	First derivative of right ascension of the ascending node
RAX		57.2957195 (deg/rad)
RIGHT		Right ascension of ascending node in degrees
RITAS		Array for storage of Ω values
RITASC	Ω	Right ascension of the ascending node
RJ	r	Distance from center of earth to satellite
RO	R_{o}	Radius of earth at subsatellite point
SNAME1 SNAME2		Satellite name
SNAME A SNAME B		Arrays for storage of satellite names
SOLMN	M_{N}	Mean anomaly at the node
SOLMS	M(t)	Mean anomaly at time of report
SUBLN	λ _N	Longitude of the node in degrees
TIM		Time of report in hours and minutes
TIME		Array of times at which reports are to be issued
TME		Time of report in hours and minutes
TIZ		Year of report
TN	t_N	Time of nodal crossing for revolution number of report

U	μ	Argument of latitude of satellite at time of report
VEK	. v	True anomaly at time of report
YCONS		Array for storage of θ_0 values
YCONST	θο	Sidereal time at Greenwich at beginning of year of report
YEAE		Array for storage of epoch years
YEARE		Year of epoch
YEARP		Year of epoch of decay equation
YEAP		Array for storage of epoch years of decay
YEAR		Year of report
YR		Last digit of year of report
ZATE ZETE		Satellite name



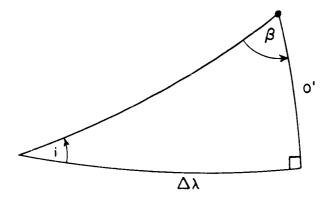



Illustration of Angle β

Fig. 7.1

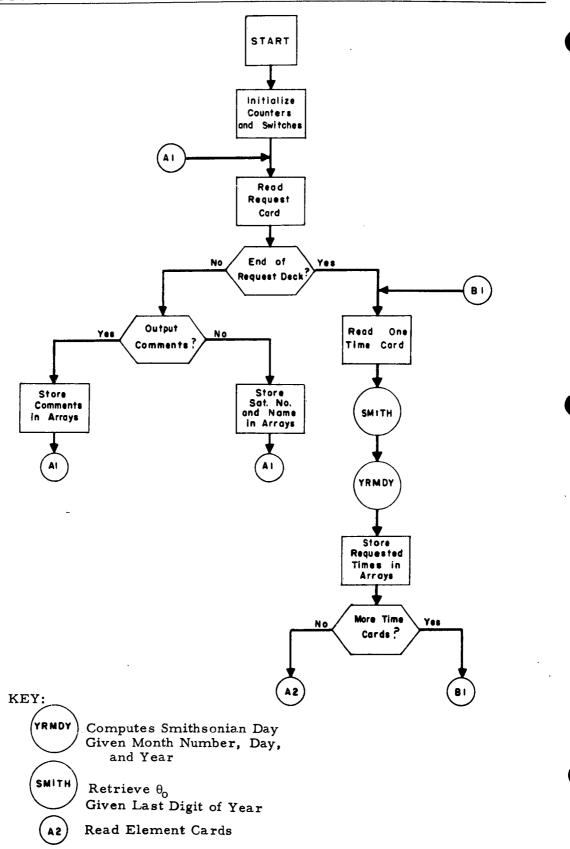


1-7-14

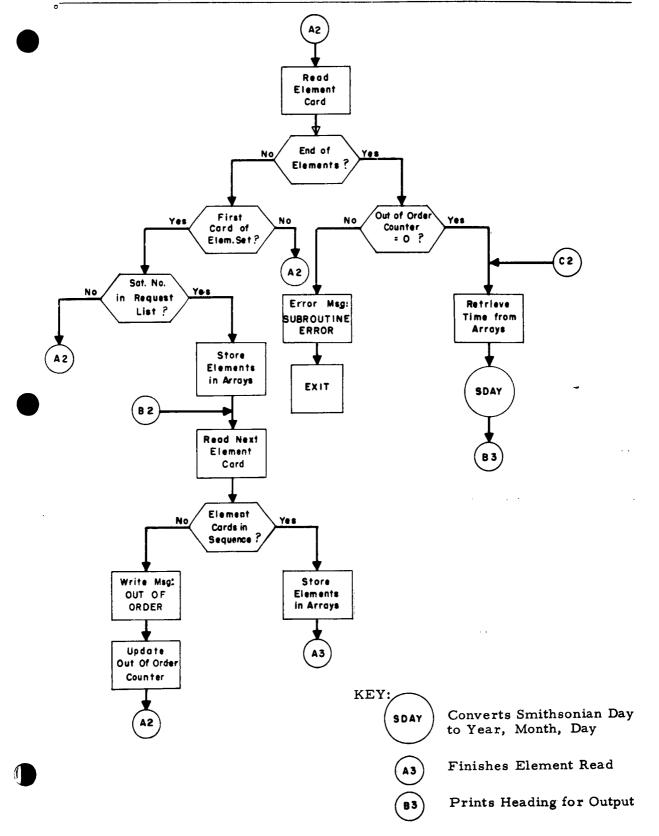


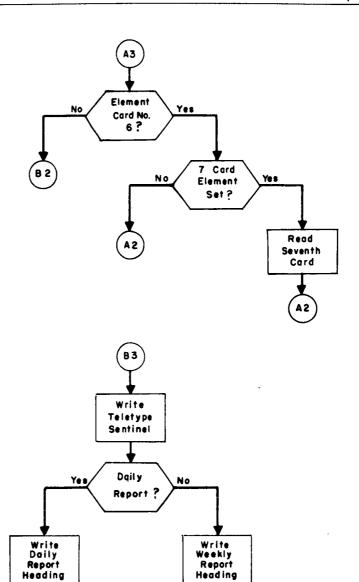


- (A2) Read Element Card No. 1
- (82) Read Element Cards No. 2-6
- Retrieve First Set of Elements for Computations

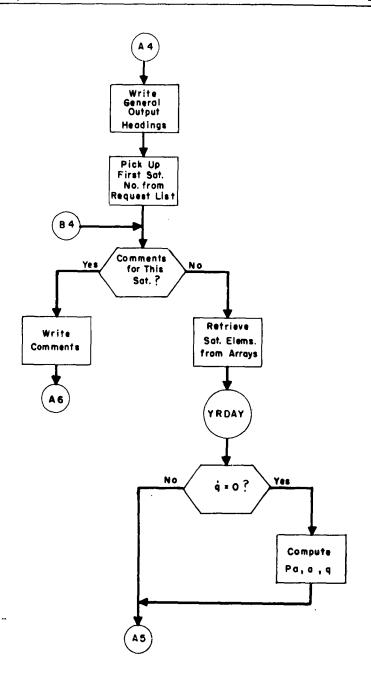

- (A5) Compute Position for This Satellite
- A6 Check to See if All Satellites Have
 Been Processed

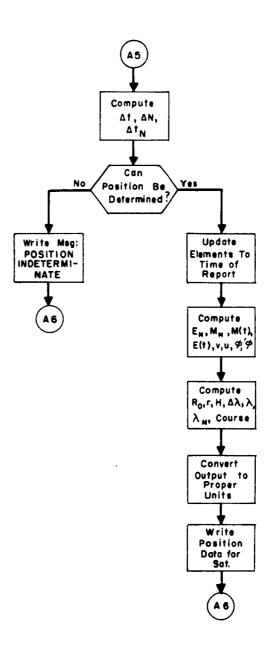

Check to See if All Satellites
Have Been Processed

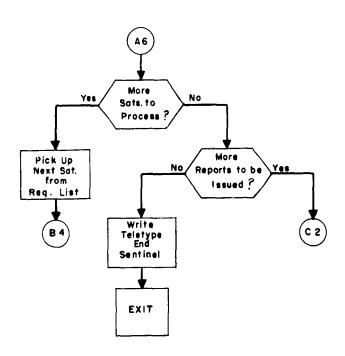

- (84) Start Processing Next Satellite
- (c2) Retrieve Time for Next Report

8.1 MAKETAPE, Make Input Tape for TELTYP

8.2 Function

The program MAKETAPE produces a magnetic output tape incorporating the message sentinels required by the TELTYP program. Only one message is produced by the program. An optional control feature will produce the message broken into 90-line segments.

8.3 Input

Input data originates from the Schedule Tape. This input is moved by the system from the Schedule Tape to the System Data Tape (logical 0).

Two control cards are used in addition to the data cards containing the message to be converted. The following should be in cols. 17-24:

- 1. TELEFORM
- 2. FINDATA

8.3.1 Description of Control Cards

1. TELEFORM

This card, if present, will precede the data deck. When encountered, it will signal the program to break the message into 90-line segments.

2. FINDATA

This must be the last card of the data deck. The program exits to the executive program when this card is intercepted.

8.4 Output


The output tape (logical 11) created by this program is in a form acceptable for subsequent conversion by the TELTYP program. A hard copy of the message with its sentinels may be obtained by printing through the UBC using data select one. For a discussion of the sentinels used, the writeup of the TELTYP program should be consulted.

8.5 Processing


MAKETAPE reads data into core from logical tape zero. Each card image is scanned for the control information described under the input section. If TELEFORM is found, an internal switch is set to cause line counting. If the program is in the line counting mode, each group of 90 lines will be preceded by the begin sentinel and followed by the end sentinel required by the TELTYP program.

All data read into core will be written onto the output tape, with the exception of right-adjusted blank fields. The program will exit to the executive routine when the FINDATA control card is intercepted.

It is generally expected that the TELTYP program will be used immediately following this program or, at least, before logical tape eleven is wrapped up by the system.

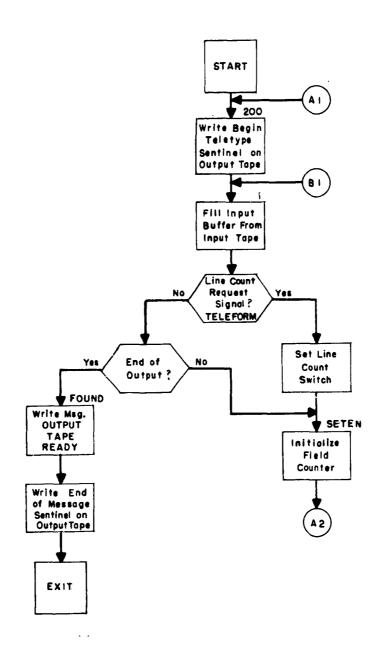

KEY: Find First Non-Blank Field On Right of Input Card

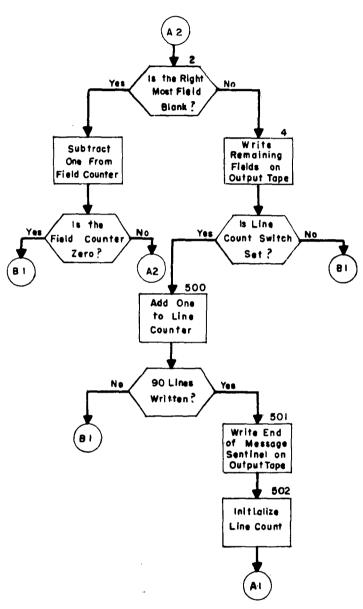

Writes Begin Sentinel for Teletype Message

(Bi) Reads Next Input Card

9.1 XYZLAR, Look Angle Report From x, y, z, Coordinates

9.2 Function

The program is used for predicting the position of a satellite in terms of the tracking coordinates of a particular station. The program is especially useful for deep space probes.

The position of the satellite is defined in terms of the right ascension, declination, azimuth, elevation, and slant range at the prediction time, for a particular station. The elevation and illumination angles of the sun are also computed to determine if the satellite is visible.

Input options exist to consider the restrictions imposed by the type of observing equipment used. No data will appear for a requested prediction time unless these limitations have been met.

The ephemeris data, used in the calculations of the look angles, may be read from an ephemeris tape previously written by either the Unified Encke Differential Correction Program (accuracy, approximately ten lunar distances), or by the Interplanetary Program. If the ephemeris tapes are not available, the data may be read in from punched cards. Predictions for more than one station may be based on the same ephemeris data.

9.3 Input

An input set consists of a standard station card for the observing station, a request card, and the ephemeris information from an ephemeris tape or punched cards containing the ephemeris data followed by a blank card. Each input set results in a look angle schedule for the station specified. If look angle schedules are required for the same satellite but different observing stations, additional pairs of cards, composed of a station card and a request card, may be added to the input deck. If new ephemeris data is to be entered from punched cards, the station card of the next input set must contain a negative station number. Any number of input sets may be entered. The last set must be followed by a blank card which is in addition to the blank card following the ephemeris data cards.

The format of the request card follows: columns 1 to 4 contain the year of the desired predictions; columns 5 to 7 contain the day of year; columns 8 and 9 contain the hour; columns 10 and 11 contain the minutes; columns 12 to 17 contain the base, or starting time, for the desired predictions.

The time increment used is determined by the ephemeris data. Columns 25 to 34 contain the maximum time increment or the time range for predictions. This time is expressed in minutes from the base time of the request. Any ephemeris data beyond this time range will be ignored. If columns 25 to 34 are blank, the program will calculate predictions for all ephemeris data supplied. Program option switches are specified in columns 44 to 47. A 1 punch in the respective column will set an internal switch. A 1 punch in column 44 indicates that the ephemeris data will come from the ephemeris tape for this set of input. If column 44 is blank the program expects ephemeris data from ephemeris cards. A 1 punch in column 45 indicates that only visible passes are desired. If a 1 is punched in column 46, negative elevations will be acceptable. A 1 is punched in column 47 if punched ephemeris cards are desired as output.

9.3.1 Ephemeris Cards

The ephemeris cards contain the time increment from the base time specified on the request card and the inertial geocentric coordinates of the satellite. All data is in floating point. Columns 1 to 14 contain the time increment, columns 15 to 28 contain the x-coordinate, columns 29 to 42 contain the y-coordinate, and columns 43 to 56 contain the z-coordinate in earth radii. Ephemeris cards are ordered by increasing time increment. A satellite identification card with the alphanumeric satellite name punched in columns 1 to 16 must precede the ephemeris cards.

9.3.2 Ephemeris Tape

The ephemeris tape can be obtained from two sources: 1) the Unified Encke Differential Correction Program and; 2) the Interplanetary Program. Both programs were written by Aeronutronic a division of the Ford Motor Company. In the former case, logical tape 10 is the desired tape and in the latter, the required tape is logical 9. The format for both tapes follows:

Block 1. Contains the alphanumeric satellite name in the first two words.

Block 2 thru N. Contains a time increment from the base time and x, y, z, x, y, z in the inertial geocentric coordinate system at that particular time. Each value is contained in one full computer word and is in the floating point format. Eighteen groups of these seven values plus two zero words make up each one hundred and twenty-eight word block. The tape is considered to be terminated when the first word of a seven word set is filled with Z's.

9.4 Output

If a 1 is punched in column 47 of the XYZLAR request card, the ephemeris data will be punched on cards in the same format as the input ephemeris data when the binary ephemeris tape is used for input. The satellite name appears on the first card.

Printed output contains all TELTYP control functions, therefore, transmission of the output is possible. The first line is the alphanumeric satellite name. The second line is the comment LOOK ANGLES FOR followed by the alphanumeric station name. The third and fourth lines are heading lines describing the output data for each prediction time. Each data line contains the day of year, hour, minute, and fraction of minute of the search point, the predicted right ascension, declination, azimuth, and elevation in degrees and slant range in kilometers. These quantities define the position of the satellite. The elevation and illumination angles of the sun complete the data line and determine if the satellite will be visible at the time of the prediction.

9.5 Processing

XYZLAR predicts the right ascension, declination, azimuth, and elevation angles for a given satellite as well as the elevation and illumination angles of the sun at the requested prediction time. Restrictions on the observing capability of the station, specified on the request card, are considered. Any restrictions that are not met will cause computations to cease for that particular prediction time,

and no printed output will appear. The program will begin processing the next ephemeris position. In addition, when and if the maximum time increment is exceeded, the program will ignore the remaining ephemeris data of that input set. The next request is then processed.

If an input set utilizes ephemeris cards, all of the ephemeris data is written in binary on logical tape seven before processing begins. However, an input set may originally include an ephemeris tape mounted on logical seven and in that case, processing will begin immediately.

The program adds the specified base time from the Request card, and the time increment from the ephemeris data to obtain the time of the search point. The sidereal time at Greenwich at prediction time and the coordinates of the station in a fixed system are found in order to compute the slant range. The right ascension and declination of the satellite, the sidereal time at the station, the hour angle, zenith distance, and elevation angle are computed for the prediction time.

If negative elevation angles are acceptable, the program continues on to compute the azimuth. If, however, negative elevation angles are not acceptable, a test is made and if the angle is found to be negative the program returns to process the next group of data.

Visibility at prediction time is determined by computing the elevation and illumination angles of the sun. If the elevation angle is less than -4 degrees, and the illumination angle is greater than -4 degrees, then the satellite is visible. If only visible passes are required, these conditions must be met.

Output quantities at each prediction, or search point, time include the time, right ascension, declination, azimuth, elevation, and slant range of the satellite, and the elevation and illumination angles of the sun.

The program then processes the next group of data. If the station number is positive, the program computes another search ephemeris for the same satellite in the manner stated above, but for this new station. If the station number is found to be negative new ephemeris information is assumed. If the station card is blank, control is returned to the executive program.

Punched card output, if specified, is under control of a PATH switch which eliminates multiple punching of the same ephemeris data. This switch also controls the production of an ephemeris tape from a set of ephemeris cards. This switch equals one (1) for the first time through the program for a particular set of ephemeris data, and two (2) for each subsequent pass through the program for this same data. It can be reset to one by reading a negative station number. Thus, ephemeris cards are punched or an ephemeris tape made only on the first pass through the program for that particular set of ephemeris data.

9.5.1 Error Message

If the program is unable to read the ephemeris tape, the comment EPHEMERIS TAPE TROUBLE will be written on the output tape. In addition, the comment PROGRAM TERMINATED DUE TO EPHEMERIS TAPE TROUBLE will appear on the Flexo, and control will return to the executive routine.

9.6 Formulation

- 1. $\phi' = \tan^{-1} (.99329985 \tan \phi)$
- 2. $R = [.9966443/(1 .00670015 \cos^2 \phi)^{1/2} + H/6378174] 6378.174$
- 3. Compute station coordinates in rotating geocentric system.

 $x_{stat} = R \cos \lambda \cos \phi'$

 $y_{stat} = R \sin \lambda \cos \phi'$

 $z_{stat} = R \sin \phi'$

- 4. Convert starting or base time to days and fractional days. $t_a = days + hours/24 + minutes/1440 + secs/86400$
- 5. Find time of computed point.

 $t_c = t_a + t_i$

If $t_i > t_{max}$ return to process next input set.

- 6. $r = x^2 + y^2 + z^2$
- 7. $\theta_{G} = \theta_{o} + .98564735 t_{d} + 360.985647 t_{f}$ $0 \le \theta_{G} < 360^{\circ}$
- 8. Compute station coordinates in inertial geocentric system

 $\bar{\mathbf{x}} = \mathbf{x}_{stat} \cos \theta_{G} - \mathbf{y}_{stat} \sin \theta_{G}$

 $\overline{y} = x_{stat} \sin \theta_G + y_{stat} \cos \theta_G$

 $\overline{z} = z_{stat}$

9. $\rho = [(x-\overline{x})^2 + (y-\overline{y})^2 + (z-\overline{z})^2]^{1/2}$

where x, y, and z are geocentric coordinates from the ephemeris data.

- 10. $\cos \alpha = (\mathbf{x} \overline{\mathbf{x}})/[(\mathbf{x} \overline{\mathbf{x}})^2 + (\mathbf{y} \overline{\mathbf{y}})^2]^{1/2}$ $\alpha = \tan^{-1}[(\mathbf{y} \overline{\mathbf{y}})/(\mathbf{x} \overline{\mathbf{x}})]$ If $\cos \alpha$ negative, $\alpha = \alpha + \pi$. Otherwise, $0 \le \alpha < 360^\circ$
- 11. $\sin \delta = (z \overline{z})/\rho$ $\delta = \sin^{-1}(\sin \delta)$

12.
$$\theta_{ST} = \theta_G + \lambda$$

13.
$$HA_s = \theta_{ST} - \alpha$$
 $0 \le HA_s < 360^{\circ}$

14.
$$\beta = \cos^{-1} (\sin \phi \sin \delta + \cos \phi \cos \delta \cos HA_s)$$

15.
$$h = \pi/2 - \theta$$
If negative elevations acceptable, go to 16.
If negative elevations not acceptable and $h < 0$: Go to 29.

16.
$$\sin Az = (\cos \delta \sin HA_s/\sin \beta)$$

 $\cos Az = (-\sin \delta \cos \phi + \cos \delta \sin \phi \cos HA_s)/\sin \beta$
 $Az = \tan^{-1} (\sin Az/\cos Az)$
If $\cos Az < 0$, $Az = Az + \pi$. $(0 \le Az \le 360^{\circ})$

17. Begin visibility computations. l_{\odot} (t) = L_{\odot} + .98564735 t_{c} + 1.91665 sin (.98564735 t_{c} - c_{14})

18.
$$\alpha_{\alpha} = I_{\alpha}(t) - 2.46682 \sin(2I_{\alpha}(t))$$

19.
$$\delta_{\Omega} = \tan^{-1}(.4336608 \sin \alpha_{\Omega})$$

20.
$$\theta(t) = \theta_G + \lambda$$

21.
$$h_{\Theta} = \sin^{-1} \left[\sin \phi \sin \delta_{\Theta} + \cos \phi \cos \delta_{\Theta} \cos (\theta(t) - a_{\Theta}) \right]$$

22.
$$\alpha_{gc} = \tan^{-1}(y/x)$$

23.
$$SD_{gc} = \sin^{-1}(z/r)$$

 $\xi = \cos^{-1}(-\cos(SD_{gc}) - \cos\delta_{\Theta}\cos(\alpha_{\Theta} - \alpha_{gc}) - \sin(SD_{gc}) \cdot \sin\delta_{\Theta})$

24.
$$\eta = \sin^{-1}(1/r)$$

If only visible passes desired, go to 25. Otherwise, go to 27.

25. If $h_{\varphi} > -4$ degrees, pass not visible: Go to 29.

26. I =
$$\xi$$
 - η
If I < - 4 degrees, pass not visible: Go to 29. Otherwise Go to 28.


27.
$$I = \xi - \eta$$

- 28. Output of time, a, δ , Az, h, ρ , h_{φ}, I.
- 29. Pick up next group of ephemeris data, Go to 5.


9.7	Glossary		
	Location	Symbol	Meaning
	AA	×stat	x coordinate of station in rotating geocentric system
•	BB	y _{stat}	y coordinate of station in rotating geocentric system
	C14	c ₁₄	Difference between longitude of sun and argument of perigee of sun
	C2PI	2 π	Constant 6.28318530
	CAPR	R	Radius of earth at station
	CAZ	cos Az	Cosine of azimuth angle of satellite
	CC	^z stat	z coordinate of station in rotating geocentric system
	CRA	cos a	Cosine of right ascension of predicted sighting
	CRAGC	cosagc	Cosine of a _{gc}
	CXI	cos ξ	Cosine of §
	CZD	cos β	Cosine of zenith angle
	ELEVA	h	Elevation angle of sat. (predicted)
	ETA	η	Intermediate calculation for illumination
	FMIN		Fraction of minute of computed point
	HITE	н ~	Height of station
	HSUNJ	h _e	Elevation of sun
	IDAY		Day of month of computed point
	IDCI		Symbolic name for input tape
	IDCO		Symbolic name for output tape
	IHM		Hour, min, fractional minute of computed point
	IPUNCHC		Symbolic tape name for intermediate punch card tape
	ISSW4		l, Ephemeris tape0, Ephemeris cards
	ISSW5		l, Only visual passes desired0, All passes desired
	ISSW6		 Only positive elevations desired All elevations desired

	•	
ISSW7		 punch cards from ephemeris tape don't punch cards
ISW		l, for first pass through program for a particular set of ephemeris data
		2, for each subsequent pass through program for same ephemeris data
NSTA		Station number
OX	l _o (t)	Longitude of the sun at prediction time
PHI	ф	Geodetic latitude of station
PHIP	φ'	Geocentric latitude of station
PI	π	Constant: 3.14159265
RAD		Constant: degrees/radian
RAV	r	Distance of satellite from center of earth
S	HA _s	Hour angle of satellite
SAZ	sin Az	Sine of azimuth angle of satellite
SD		Day of year of base time from Request card
SDEC	$\sin\delta$	Sine of declination .
SDGC	$\mathtt{SD}_{\mathtt{gc}}$	Intermediate calculation
SH		Hour of base time from Request card
SHSUNJ	$\sin h_{\Theta}$	Sine of elevation of sun
SLRANG	ρ	Slant range
SM		Minutes of base time from Request card
SS	,	Seconds and fraction of seconds from Request card
STIME	ta	Base time of predictions
STNM1, STNM2 STNM3		Alphanumeric station name
TA	t _i	Time increment from ephemeris data
	t_c	t _i + t _a Time of computed point
TD	t_d	Prediction time in days
TDECS	tan $\delta_{\mathbf{o}}$	Tangent of declination of sun
TF	t_f	Prediction time in fractional days
TH	th	Hour of prediction time
THETG	θG	Sidereal time at Greenwich at prediction time in degrees
THETST	$\theta_{\mathbf{ST}}$	Sidereal time at the station
THTGT	θ(t)	Sidereal time at station

TMAX	t_{max}	Maximum time increment from base time
TPHIP	tan φ'	Tangent of geocentric latitude of station
TRA	tan a	Tangent of right ascension of predicted sighting
x	x	Geocentric x coordinate of satellite in earth radii from ephemeris data
XAZ	Az	Azimuth angle of satellite
XBAR	≖	x coordinate of station in inertial geocentric system
KDECS	δ_{o}	Declination of sun
XI	\$	Intermediate quantity
XIA	I	Illumination angle (sun).
XL .	λ	Longitude of station
XLSUN	$\mathbf{L}_{\mathbf{e}}$	Celestial longitude of sun at start of year
X RASUN	a _o	Right ascension of sun
XTHETG	$\theta_{\mathbf{G}}$	Sidereal time at Greenwich at prediction time, in radians
XZD	β	Zenith angle
Y	у	Inertial geocentric y coordinate of satellite in earth radii, from ephemeris data
YR		Year of base time of predictions
YBAR	y	y coordinate of station in inertial geocentric system
Z	z	Inertial geocentric z coordinate of satellite in earth radii, from ephemeris data
ZBAR	Z	z coordinate of station in inertial geocentric system
ZDEC	δ	Predicted declination of satellite
ZRA	a	Right ascension of predicted sighting
ZRAGC	a _{gc}	Right ascension of satellite

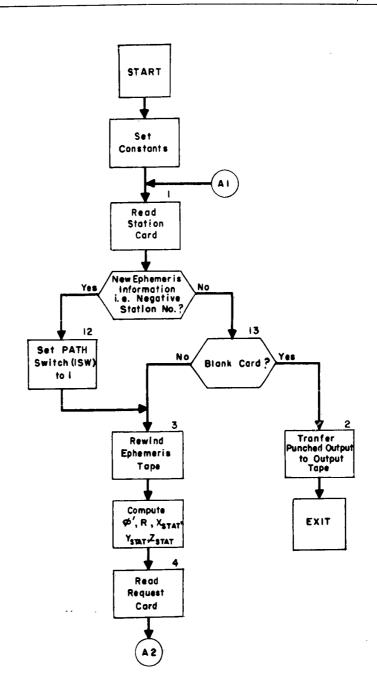


Obtain Ephemeris Data

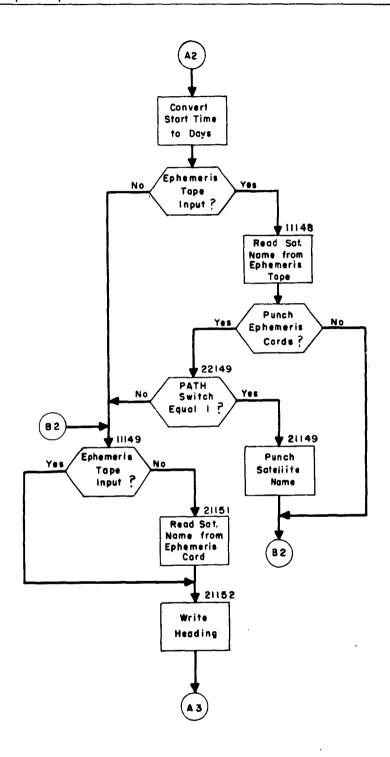


KEY:


(A3) Transfer Any Input Cards to Ephemeris Tape

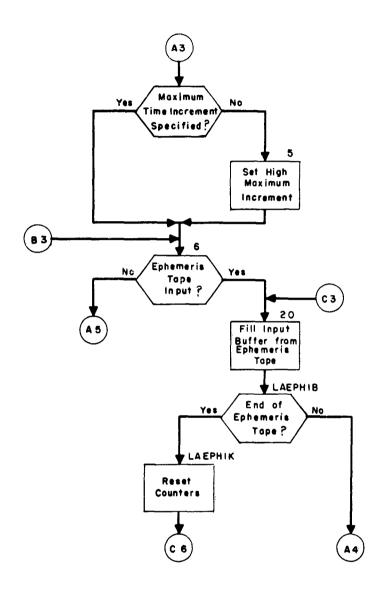


- (A 5) Process Ephemeris Cards
- (A4) Retrieve Time and Related x, y, z
- (cs) Obtain Next Input Set

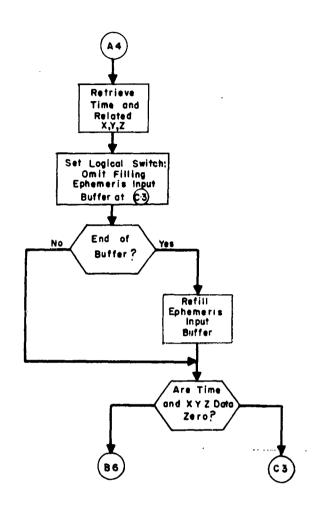


- 8 6) Begin Computations for Prediction Time
- (c3) Return to Ephemeris Tape Buffer for Next t, x, y, and z

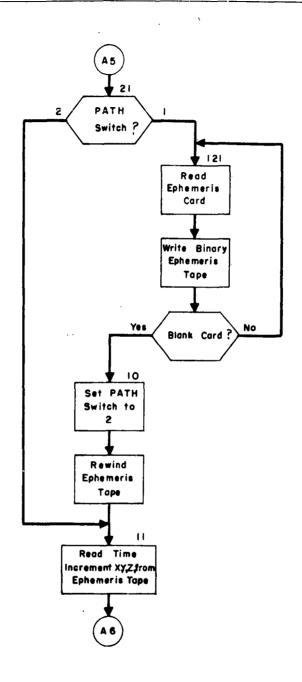

(A6) Begin Computations for Requested Prediction Time

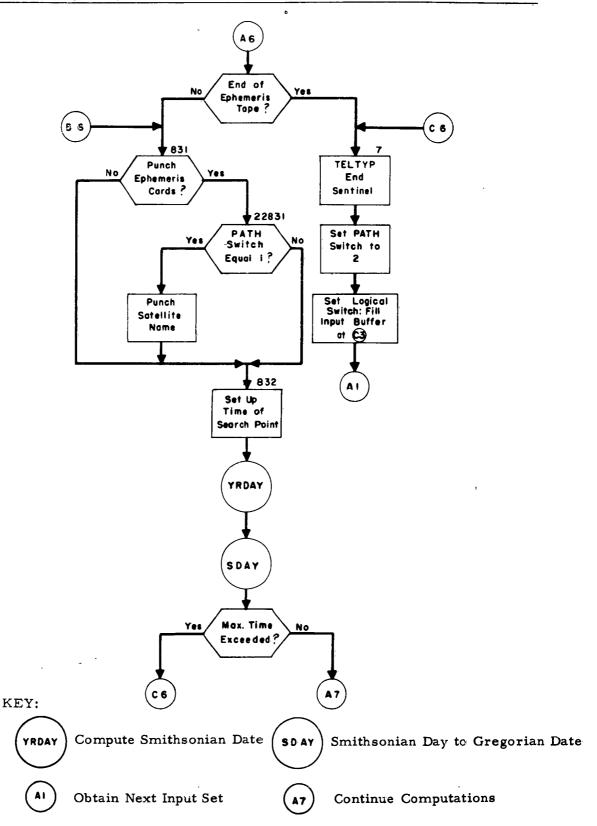

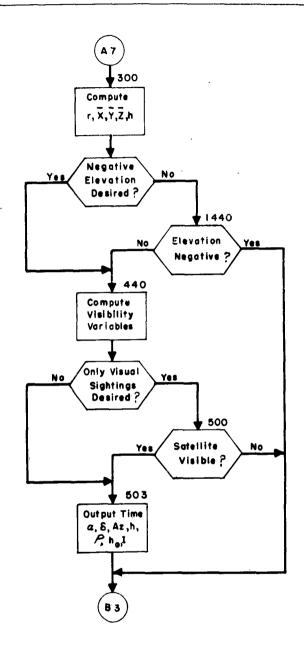

Obtain Next Group of Ephemeris Data

10.1 POSE, Point Search Ephemeris

10.2 Function

When a radar picks up an unknown object, one may have for some reason, the suspicion that it could have been an unidentified satellite. If this is the case, one likes to search for it. All orbital elements, however, are completely unknown. Disregarding the recession of the line of the nodes and the precession of the line of apsides, which is permissible over one or two revolutions, once can expect that the object (if it should be a satellite) will come close to the same point in inertial space again, one revolution later.

The program computes a search ephemeris for a given station for this point in space.

10.3 <u>Input</u>

The input consists of: (1) a request card, (2) a standard observation card, (3) one or more standard station cards and (4) an option card.

The information contained on the request card is as follows:

- Cols. 1-5 T-start in minutes (DDDD.)
 the smallest orbital period expected
 (usually 80 mins.)
- Cols. 6-8 Δt in minutes (DD.) the time increment added to the orbital period (usually 5 mins.)
- Cols. 9-13 T-stop in minutes (DDDD.) the largest orbital period expected.
- Col. 14 Iout the output option desired

 1 = long form

 0 = short form

 (explained in output section)

A decimal point should be punched within fields one, two and three.

The option card is used to initiate the read-in of a new request deck or to terminate the program. If a -1 is punched in cols. 1-4, the program will read in a request card, observation card, station card(s) and an option card. If a zero or blank field is read from the option card the program will be terminated.

10.4 Output

The output consists of a look-angle schedule for each station requested. The long form of output includes the following data:

- a) Station information: latitude, longitude and height
- b) Observed time in days, hours, minutes and seconds (GMT)
- c) Observed elevation, azimuth and slant range
- d) Value of θ_G sidereal time at Greenwich
- e) Value of $\boldsymbol{\theta}_{_{\mathbf{S}}}$ sidereal time at the station
- f) Distance of station from center of the earth (CAPR)
- g) Geocentric station latitude
- h) Station 's Cartesian coordinates where x and y are in the equatorial plane and x points to the Greenwich meridian.
- i) Right ascension and declination of station
- j) Cartesian coordinates of station 's position where x and y are in the equatorial plane and x points to the vernal equinox.
- k) Cartesian coordinates of the point or satellite where x and y are in the equatorial plane and x points to the vernal equinox.

In addition to the above the short and long forms of output list the look-angle information:

- a) Time of crossing day, hour and minutes of Zebra time.
- b) Elevation and azimuth angles
- c) Slant range in kilometers

The sentinels required by the TELTYP program will be supplied to enable transmission of the short form, or look-angle section, of the output.

10.5 Processing

The first request card, observation card and one station card are read at the start of the program. The x, y, and z coordinates of the station and the object are then calculated. These values are written on the output tape if a long form of output is requested.

The assumption made is that the object will appear in the same place one revolution later. Therefore, the look-angle, or search ephemeris quantities are calculated for the time t, which is equal to the observation time plus the smallest orbital period expected. If the point is visible at the station the quantities are written out on tape.

The orbital time is then updated by the time increment and compared to the largest orbital time expected. If this period is within the limits, the search ephemeris is computed for this new time. The process continues until the time limits have been exceeded.

After the search ephemeris has been computed for the largest orbital period expected the next station card is read into core. If the station number is greater than zero, the look-angles for this same object are computed for this new station. A negative station number indicates that a new request deck is to be read into core and the processing initiated for another point in space. A blank or zero station number terminates all processing and the program returns to the executive program.

10.5.1 Error Messages

2.

- THE SLANT RANGE IS MISSING.
 The program exits to the executive routine.
 - SUBROUTINE ERROR EXIT FROM OCTAL

 Subroutine or irrecoverable input-output error.

 Exits to executive program if the GO option is taken.

 The message is retyped if the STOP option is specified.

 A dump should be taken if possible.

10.6 Formulation

a) Initialization

1.
$$\theta_{G} = \theta_{o} + .98564724 \cdot t_{D} + 360.98565^{\circ} \cdot t_{FR}$$

2.
$$\theta_s = \theta_G + \lambda_E$$

3.
$$t_g \phi' = .99329985 \cdot t_g \phi$$

4.
$$\xi = R \cdot \cos \ell \cdot \cos \phi'$$

5.
$$\eta = R \cdot \sin \ell \cdot \cos \phi'$$

6.
$$\zeta = R \cdot \sin \phi'$$

7.
$$\beta = 90 - h_0$$

8. $\sin \delta = \cos \beta \cdot \sin \phi + \sin \beta \cdot \cos \phi \cdot \cos Az$

9.
$$\sin S = -\sin \beta \cdot \sin Az/\cos \delta$$

10.
$$\alpha = \theta_s - S$$

11.
$$\Delta x = \rho \cdot \cos \alpha \cdot \cos \delta$$

12.
$$\triangle y = \rho \cdot \sin \alpha \cdot \cos \delta$$

13.
$$\triangle z = \rho \cdot \sin \delta$$

14.
$$X = \zeta \cdot \cos \theta_G - \eta \cdot \sin \theta_G$$

15.
$$Y = \zeta \cdot \sin \theta_G + \eta \cos \theta_G$$

16.
$$Z = \xi$$

17.
$$x = X + \Delta x$$

18.
$$y = Y + \triangle y$$

19.
$$z = Z + \angle z$$

b) Computation of look-angle

20.
$$t = t_{obs} + t_{start}$$

21.
$$\theta_G = \theta_0 + C_3 \cdot t_d + C_2 \cdot t_{fr}$$

22.
$$\theta_s = \theta_G + \lambda_E$$

23.
$$X = \zeta \cdot \cos \theta_G - \eta \sin \theta_G$$

24.
$$Y = \zeta \cdot \sin \theta_G + \eta \cos \theta_G$$
 (Note that Z is a constant)

25.
$$\Delta x = x - X$$

26.
$$\triangle y = y - Y$$
 (Note that $\triangle z$ is a constant)

$$27. \quad \rho = \sqrt{\Delta x^2 + \Delta y^2 + \Delta z^2}$$

28.
$$\sin \delta = \Delta z/\rho$$

29.
$$\cos \delta = \sqrt{1 - \sin^2 \delta}$$

30.
$$\cos \alpha = \Delta x / \rho \cos \delta$$

31.
$$S = \theta_s - \alpha$$
, $0 \le S \le 360$

32.
$$\cos \beta = \sin \phi \cdot \sin \delta + \cos \phi \cdot \cos \delta \cdot \cos S$$

33.
$$\sin Az = (-\cos \delta \cdot \sin S)/\sin \beta$$

34.
$$\cos Az = (\sin \delta \cdot \cos \phi - \cos \delta \cdot \sin \phi \cos S)/\sin \beta$$

35.
$$h = 90^{\circ} - \beta$$


36.
$$t = t + \Delta t$$


37. If
$$t \le t_{stop}$$
: Go to 21

10.7	Glossary		\mathbf{O}
	Location	Symbol	Meaning
	AA1		First digit (may be overpunched) of satellite no. from observation card
	AZ	Az	Azimuth angle
	AZD		Azimuth of computed point in degrees
	Az_1		Azimuth of original observation in degrees
	Ci	Ci	.99329985 conversion coefficient used to compute ϕ
•	C2	C ₂	360.98565 rotation rate of the earth in degrees/solar day
	C3	c ₃	. 98564724 rotation rate of the earth in (deg/solar day) -360°
	C4	C ₄	1440 minutes/day
	CAPR	R	Radius of the earth at the station
	CAPX	X	x coordinate of station, x, y in equatorial plane;
	CAPY	Y	y coordinate of stations points toward the
	CAPZ	Z	z coordinate of station vernal equinox
	COSDEC	cos δ	Cosine of declination
	COSLAT	cos φ	Cosine of station latitude
	COSZD	cos β	Cosine of zenith angle
	C2PI	2 π	6. 2831853072
	DA		Day of observation
	DECL	δ	Declination
	DELT	Δt	Time increment
	DELX	△x	x coordinate - increment from station to satellite
	DELY	∠ y	y coordinate - increment from station to satellite
	DELZ	\triangle ${f z}$	z coordinate - increment from station to satellite
	EARTHR		6378.174 km/e.r.
	ELEV	h _o	Elevation angle of observation
	ELEVD	h	Elevation angle of computed point
	ETA	η	y coordinate of station (x, y in equatorial plane; x points to Greenwich meridian)

IOUR		Hour at which point is computed
IRANGE		Slant range for output point
IYR		Last digit of year of observation
IDAY		Day at which point is computed
KSTA		Station number
MO		Month of observation
PI	π	3.1415926536
RA	a.	Right ascension of satellite
RANGE	ρ	Slant range of computed point
RHO		degrees/radian = 57.29578
S	S	Hour angle
SINAZ	Sin Az	Sine of azimuth angle
SINDEC	Sin δ	Sine of declination
SINLAT	Sin φ	Sine of station latitude
SINZD	$\sin \beta$	Sine of zenith angle
SNI, SN2 SN3, SN4		Station name
STALAT	φ,	Station latitude
STALATC	, 4	Geocentric latitude of station
STALON		Station longitude in degrees
STH		Station height
STLORA	$^{\lambda}_{ ext{E}}$	Station longitude in radians
Т	t	Time at which ephemeris is computed
TD	\mathbf{t}_{D}	Day of year of observation
T DAYS	t d	Integer part of t
TFR	t _{fr}	Fractional part of t
TH	11	Hour of observation
THETAO	θ_{o}	Greenwich Sidereal time at the beginning of year
THETAS	θs	Siderial time at station
THETAG	$\theta_{\mathbf{G}}$	Greenwich sidereal time
THETAG1		Siderial time at Greenwich in degrees
TM		Minute of observation
TMIN		Minute at which point is computed
TOBFR	^t FR	Time of observation in fractional part of day


TOBS	tobs	Day of year of observation
TS	000	Seconds of observation
TSTART	t start	Minimum period
TSTOP	tstop	Maximum period
x	×	x coordinate of satellite
XAT		Last 2 digits of satellite number from observation card
XI	ξ	x coordinate of station (x, y in equatorial plane; x points to Greenwich meridian)
Y	у	y coordinate of satellite
YEAR		Year of observation
YR		Last digit of year of observation
Z	${f z}$	z coordinate of satellite
ZENDIS	β	Zenith angle
ZETA	ζ	z coordinate of station(x, y in equatorial plan x points to Greenwich meridian)

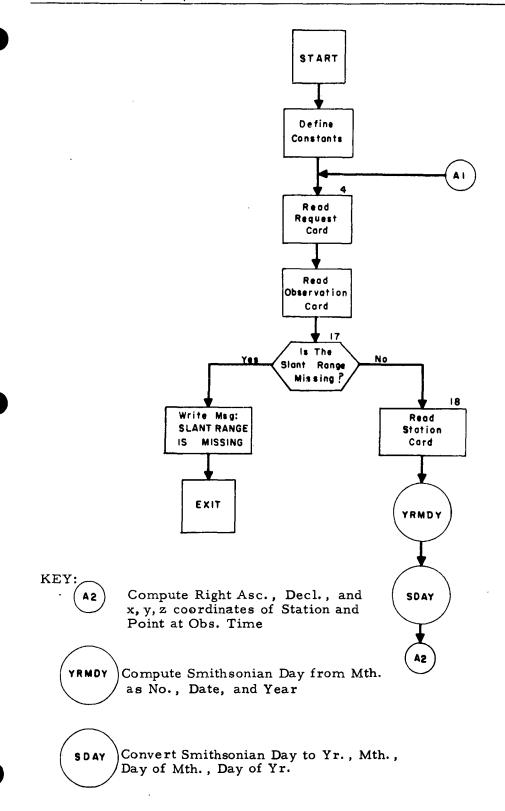

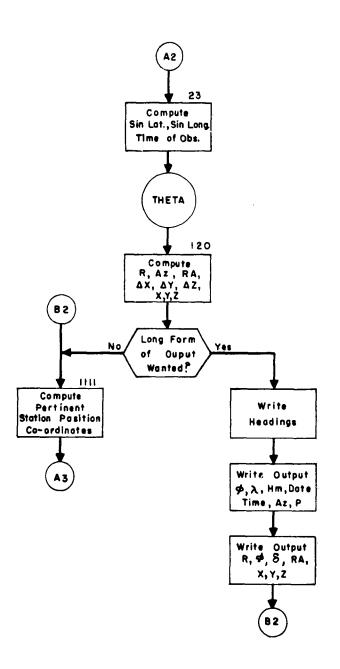


KEY: (A3) Writes Headings and Begins Ephemeris Calculations

THETA Retrieve θ_0 for Year.

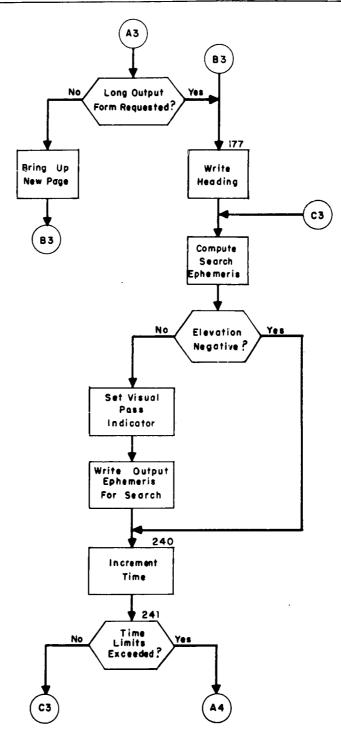

Tests for Visual Passes

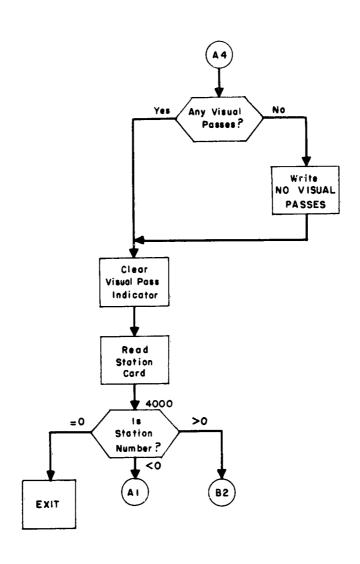

- Reads New Request Card, Observation Card and Station Card
- Calculates Search Ephemeris for Same Satellite but New Station

11.1 ORPS, Orbital Plane Search

11.2 Function

ORPS is used for predicting search times for observing satellites at a given observing station. Limitations of the observing station, imposed by the type of equipment used, are considered. For example, the results must meet the criteria for maximum slant range, minimum elevation angle, and visibility.

The program computes the XYZ search point coordinates of a satellite from which its position may be defined in terms of right ascension, declination, azimuth, elevation, and slant range. The elevation and illumination angles of the sun are also computed at the search point or prediction time.

11. 3 Input

A set of input consists of a standard six or seven card element set, a standard station card for the observing station, and a request card. The set may be repeated as often as desired, but the last set must be followed by a blank card to terminate the program.

The format of the request card is as follows:

1) columns 1-10 contain the requested start time, in day of year, for predictional data for a given observing station and satellite; 2) columns 11-20 contain the time increment in minutes between search points; 3) columns 21-30 contain the stop time in day of year; 4) the search azimuth angle in degrees of the station is contained in columns 31-40; 5) columns 41-47 contain the maximum slant range in kilometers acceptable to the observing station; 6) columns 48-57 contain the minimum elevation angle in degrees acceptable to the observing station; 7) if only visible passes are desired, a one (1) is punched in column 58.

Quantities specified in the above paragraph depend upon the limitations of the equipment type used by the observing station.

11.4 Output

ORPS may be used with the TELTYP program if teletype transmission of the output is desired. Therefore, all TELTYP control functions are included with the output.

The first line is the heading "ORBITAL PLANE SEARCH AND XYZ LOOK ANGLE PROGRAM". The next line is the satellite and element numbers of the satellite for which the predictions were requested. The next line is the comment "ORBITAL ELEMENTS". This indicates that the nodal elements used in the computations appear in the next three rows, five columns to a row. The elements that are printed out by row are the day of year of epoch, fractional day of epoch, nodal period at epoch, rate of change of period in days/rev² at epoch, rate of change of c in days/rev³, first and second derivatives of the nodal period, the right ascension of the ascending node at epoch, first and half second derivatives of the right ascension, the argument of perigee at epoch, first and half second derivatives of the argument of perigee, eccentricity, and the inclination.

The next three lines consist of the parameters specified on the parameter input card. The start time in days of year, the time increment in minutes, and the stop time in days of year are printed. The search azimuth of the station in degrees and the criteria for maximum slant range in kilometers and minimum elevation angle in degrees are printed.

The year constants are printed including the sideral time at the start of the year, the longitude of the sun, and the difference between the longitude of the sun, and the argument of perigee of the sun.

The next line is a heading line, and the station name, latitude, longitude, and height appear directly below. The satellite and element numbers are printed next.

The main output of the program consisting of the time of search point, predicted position, and visibility quantities is preceded by two heading lines. The output appears in order of increasing time of search point in increments specified by the parameter input card.

Each data line includes the year, month, day, hour, and minute of the search point, right ascension, declination, azimuth, elevation, and slant range of the satellite, and the elevation and illumination angles of the sun. Unless the specified criteria for maximum slant range, minimum elevation angle, and visibility are met, no output for the time of search point will apppear.

11.4.1 Comments with Output

- 1. PROGRAM ASSUMES PN = PA FOR SATELLITE NO. XXX. This comment indicates that the nodal period at epoch in days is missing from the sixth card of a seven card element set. The anomalistic period is used in its place.
- 2. ELEMENT CARDS ARE OUT OF ORDER FOR SAT NO XXXX ELEM NO XXXX. This comment indicates that a card was out of order or missing in an element set. The program returns to read another element set. SATELLITE XXX CARD XXX OUT OF ORDER appears simultaneously on the Flexowriter.

11.5 Processing

ORPS predicts the right ascension, declination, azimuth and elevation angles for a given satellite and the elevation and illumination angles of the sun, in a specified time range, for a given station. The limitations of the observing station are considered. The program consists of two sections, the Orbital Plane Search section and the XYZ Look Angle section.

The Orbital Plane Search section computes the xyz point coordinates from the satellite elements and station coordinates. The geocentric latitude of the station, difference in longitude from station to search point, longitude at the search point, radius of earth at station, and the x, y, z coordinates of the station in a rotating system are computed. The time of search point is converted from day of year to month, day, hour, and minute. The sidereal time at Greenwich at the search point time, sidereal time at the search point, right ascension of ascending node at search point, argument of latitude of satellite in the orbit plane, the argument of perigee at the prediction time, the true anaomaly, semi-major axis at epoch, anomalistic period at the prediction time, semi-major axis at the predicted time, eccentricity at the prediction time, and the distance of the satellite from the center of the earth are computed. Then the x, y, z search point coordinates are found. 1-11-3

(i)

The XYZ Look Angle section defines the position of the satellite in terms of right ascension, declination, azimuth, elevation angle, and slant range from the x, y, z search point coordinates. The x, y, z coordinates of the station in a fixed system are found to compute the slant range. If the predicted slant range is greater than the maximum specified slant range, the program increments the time of search point and returns to the Orbital Plane Search section to compute the x, y, z search point coordinates for the incremented time. Otherwise, the right ascension of the satellite, declination of the satellite, sidereal time at the station, hour angle of the satellite, zenith angle, and elevation angle are computed for the search point or prediction time. If the specified minimum elevation angle is greater than the predicted elevation, the program increments the time of search point and returns to the Orbital Plane Search section. Otherwise, the azimuth is computed.

The program determines if the satellite will be visible at search point time by computing the longitude of the sun at the prediction time, right ascension, declination, and elevation of the sun, and the angle η (see illustration). If only visible passes are required, the program tests the elevation and illumination angles of the sun. If the former is less than -4 degrees and the latter is greater than -4 degrees than the pass will be visible. If not, the program increments the time and returns to the Orbital Plane Search section.

Output quantities at each search point time include the time, right ascension, declination, azimuth, elevation, and slant range of the satellite, and the elevation and illumination angle of the sun. The program then increments the time of search point, and returns to the Orbital Plane Search section unless the stop time has been exceeded.

11.6.1 Formulation - Orbital Plane Search Section

1.
$$\phi = \tan^{-1} (.99329985 \tan \phi)$$

2.
$$i_{sp} = \cos^{-1} (\sin Az \cos \phi)$$
 $0 \le i_{sp} < 180^{\circ}$

3.
$$\Delta \lambda = \cos^{-1}(\cos Az/\sin i_{sp})$$
 $0 \le \Delta \lambda < 360^{\circ}$

4.
$$\lambda_{sp} = \lambda - \Delta \lambda$$
 $0 \le \lambda_{sp} < 360^{\circ}$

- 5. R = 6378.145 (.998320047 + .001683494 cos 2 ϕ .000003549 cos 4 ϕ + .000000008 cos 6 ϕ) + H/1000
- 6. $x_{stat} = R \cos \lambda \cos \phi'$ $y_{stat} = R \sin \lambda \cos \phi'$ $z_{stat} = R \sin \phi'$

7. S
$$t_c = t_a$$

8.
$$\theta_{G} = \theta_{o} + .98564735 t_{d} + 360.985647 t_{f} 0 \le \theta_{G} < 360^{\circ}$$

9.
$$\Omega_{\rm sp} = \theta_{\rm G} + \lambda_{\rm sp} \quad 0 \le \Omega_{\rm sp} < 360^{\rm O}$$

10.
$$\Omega_{t} = \Omega + \dot{\Omega} (t_{c} - T_{o}) + \frac{1}{2} \dot{\Omega} (t_{c} - T_{o})^{2} \quad 0 \leq \Omega_{t} < 360^{\circ}$$

11.
$$\Delta\Omega = \Omega_{\rm sp} - \Omega_{\rm t} \quad 0 \le \Delta\Omega < 360^{\circ}$$
 If $|\Delta\Omega| \ge 10^{-31}$ go to 14. If $|\Delta\Omega - 180^{\circ}| \le {\rm go}$ to 14.

- 12. $\cos \gamma = \cos i \cos i_{sp} + \sin i \sin i_{sp} \cos \Delta \Omega$ Find proper quadrant of γ
- 13. $\sin \mu = (\sin \Delta \Omega \sin i_{sp})/\sin \gamma$ Go to 15.
- 14. $\sin \mu = \sin \phi / \sin i$ Go to 16.

15.
$$\mu = \tan^{-1} (\sin \Delta \Omega / \cos \Delta \Omega \cos i - \sin i / \tan i_{sp})$$
 $\cos \mu = \sin \mu / \tan \mu$ Go to 17.

16.
$$\alpha_{st} = \theta_G + \lambda$$

$$\cos \mu = \cos (\alpha_{st} - \Omega_t) \cos \phi$$

$$\mu = \tan^{-1} (\sin \mu / \cos \mu)$$

17. If
$$\cos \mu$$
 is negative $\mu_0 = \mu + \Pi$, otherwise $\mu_0 = [\mu]_{(0.360)}$

18.
$$\omega_{t} = \omega + \dot{\omega} (t_{c} - T_{o}) + \frac{1}{2} \dot{\omega} (t_{c} - T_{o})^{2} \quad 0 \leq \omega_{t} < 360^{\circ}$$

19.
$$V = \mu_0 - \omega_t$$
 $0 \le V \le 360^\circ$

20.
$$a_0 = (P_a/.058672947)^{2/3}$$

21.
$$P_{at} = P_a + \dot{P}_o (t_c - T_o) + \frac{1}{2} \dot{P}_o (t_c - T_o)^2$$

22.
$$a_t = (P_{a_t}/.058672947)^{2/3}$$

23.
$$e_t = 1 - (a_0/a_t) (1-e)$$

24.
$$r = a_t (1) - e_t^2 / (1 + e_t \omega s V)$$

25.
$$x = 6378.145 \text{ r} (\cos \mu_0 \cos \Omega_t - \sin \mu_0 \sin \Omega_t \cos i)$$

 $y = 6378.145 \text{ r} (\cos \mu_0 \sin \Omega_t + \sin \mu_0 \cos \Omega_t \cos i)$
 $z = 6378.145 \text{ r} (\sin \mu_0 \sin i)$

11. 6. 2 Formulation - XYZ Look Angle Section

26.
$$\overline{x} = x_{stat} \cos \theta_G - y_{stat} \sin \theta_G$$

$$\overline{y} = x_{stat} \sin \theta_G + y_{stat} \cos \theta_G$$

$$\overline{z} = z_{stat}$$

27.
$$\rho = [(x - \overline{x})^2 + y - \overline{y}^2 + (z - \overline{z})^2]^{1/2}$$
If $\rho > \rho_{max}$, go to 47.

28.
$$\cos \alpha = (\mathbf{x} - \overline{\mathbf{x}})/[(\mathbf{x} - \overline{\mathbf{x}})^2 + (\mathbf{y} - \overline{\mathbf{y}})^2]^{1/2}$$

$$\alpha = \tan^{-1}[(\mathbf{y} - \overline{\mathbf{y}})/(\mathbf{x} - \overline{\mathbf{x}})]$$

29. If
$$\cos \alpha$$
 negative $\alpha = \alpha + \Pi$, otherwise $\alpha = [\alpha](0,360)$

30.
$$\sin \delta = (z - \overline{z})/[(x - \overline{x})^2 + (y - \overline{y})^2 + (z - \overline{z})^2]^{1/2}$$

31.
$$\theta_{st} = \theta_{G} + \lambda$$

32.
$$HA_s = \theta_{st} - \alpha$$
 $0 \le HA_s < 360^\circ$

33.
$$z_{\beta} = \cos^{-1} (\sin \phi \sin \delta + \cos \phi \cos \delta \cos HA_s)$$

34. h =
$$\pi/2 - z_{\beta}$$

If $h_{\min} > h$, go to 47.

35.
$$\sin Az = (\cos \delta \sin HA_s)/\sin \beta$$
 $\cos Az = (-\sin \delta \cos \phi + \cos \delta \sin \phi \cos HA_s)/\sin z_d$
 $Az = \tan^{-1} (\sin Az/\cos Az)$
If $\cos Az$ negative, $Az = Az + \Pi$ $0 \le Az < 360^\circ$

36.
$$l_{\odot}$$
 (t) = L_{\odot} + .98564735 t_a + 1.91665 sin (.98564735 t_a - C_{14})

37.
$$a_{\odot} = l_{\odot}(t) -2.46682 \sin(2l_{\odot}(t))$$

38.
$$\delta_{\odot} = \tan^{-1} (.4336608 \sin \alpha_{\odot})$$

39.
$$\theta(t) = \theta_G + \lambda$$

40.
$$h_{\odot} = \sin^{-1} [\sinh \sin \delta_{\odot} + \cosh \cos \delta_{\odot} \cos (\theta(t) - \alpha_{\odot})]$$

41.
$$a_{gc} = tan^{-1} (y/x)$$
 $0 \le a_{gc} < 360^{\circ}$

42.
$$SD_{gc} = \sin^{-1}(z/6378.145 \text{ r})$$

 $\xi = \cos^{-1}(\cos SD_{gc}\cos \delta_{\Theta}\cos(\alpha_{\Theta} - \alpha_{gc}) - \sin SD_{gc}\sin \delta_{\Theta})$

43.
$$\eta = \sin^{-1}(1/r)$$
If all passes desired go to 45, otherwise test elevation of sun (h_{Θ}) . If $h_{\Theta} > -4$ degrees, pass not visible, go to 47.

- 44. I = ξ η Test illumination angle of sun (I). If I < -4 degrees, pass not visible, go to 47. If I \geq 4 degrees go to 46.
- 45. $I = \xi \eta$
- 46. Output time, a, δ , Az, h, ρ , h_O , I.
- 47. Increment time:

$$t_c = t_c + \Delta t$$

If $t_c \le t_e$ return to 8, Orbital Plane Search Section. Otherwise return to start of program to process next set.

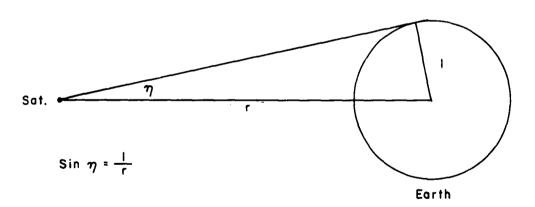


Illustration of Angle η


11.7 Glossary

Location	Symbol	Meaning
A	a	Semi-major axis
	tc-to	Start time minus epoch time
.A.A	×stat	x coordinate of station in rotating system
ALST	a _{st}	Sidereal time at the station
AO	a _o	Semi-major axis at epoch
AT	a _t	Semi-major axis at prediction time
AZ	Az	Search azimuth angle
ВВ	Ystat	y coordinate of station in rotating system
С	C	Rate of change of period at epoch in days/rev
C2PI	2π	Constant, 6.28318530
C14	C ₁₄	Difference between longitude of sun and argument of perigee of sun
CAL		Month of computed point
CAPR	R	Radius of earth at station
CAZ	cos Az	Cosine of astronomical azimuth of object
CC	^z stat	z coordinate of station in rotating system
CDL	cos Δλ	Cosine of delta longitude
CMUO	cosμ	Cosine of μ
CRA	cos a	Cosine of right ascension
CRAGC	cosagc	Cosine of agc
CXI	cos ξ	Cosine of §
CZD	β	Cosine of zenith angle
D	d	Rate of change of c in days/rev ³
E	е	Eccentricity
ELEVA	h	Elevation angle
ET	e _t	Eccentricity at prediction time
ETA	η	See illustration
FNIOM		Constant 10 ⁻³¹
GI	i	Inclination
HITE	H	Height of station
HMIN	h_{MIN}	Minimum elevation angle in degrees
HSUNJ	$^{ ext{h}}\odot$	Elevation of sun


ID		Element card number
IDAY		Day of month of computed point
IDCI		Input tape
IDCO		Output tape
IELNO		Element number
IHR		Hour of computed point
IMIN		Minute of computed point
ISATNO		Satellite number
IYR		Year of computed point
MP		Satellite number for Flexo error message
NIX		Switch set to 1 if element card out of order
NOE		E to check against column 80 for 7 card set
OMEGT	$\omega_{\mathbf{t}}$	Argument of perigee at prediction time
OMGAT	Ω_{t}	Right ascension of ascending node at search time
OMGSP	Ωsp	Sidereal time at the search point
OX	1 ⊙(t)	Longitude of the sun at prediction time
PA	P_{a}	Anomalistic period at epoch
PDDOT	p	Second derivative of nodal period (days/rev. 3)
PDOT	P	First derivative of nodal period (days/rev. 2)
PHI	ф	Latitude of station
PHIP	φ′	Geocentric latitude of the station
PI	π	Constant, 3.14159265
PMAX	^ρ MAX	Maximum slant range in km.
PN	Pn	Nodal period at epoch
PT	$\mathtt{P_{a}}_{t}$	Anomalistic period at prediction time
R ·		Constant, km/earth radius
RA	Ω	Right ascension of ascending node at epoch
RAD		Constant, degrees/radian
RADDOT	$1/2\Omega$	$1/2$ second derivative of Ω in deg/day ²
RADOT	Ω	First derivative of Ω in deg/day
RAV	r	Distance of satellite from center of the
		earth
S	HA _s	Hour angle of satellite
SAZ	sin Az	Sine of astronomical azimuth of object
SD	tds	Smithsonian days at time of computed point

SDEC	$\sin\delta$	Sine of declination
SETA	sin η	Sine of angle η
SHSUNJ	$^{ m sin}$ h $_{ m \odot}$	Sine of elevation of sun
SLRANG	ρ	Slant range
SMUO	sin μ	Sine of argument of latitude of the satellite
STEP	Δt	Time increment in minutes
STNM1, STNN STNM3,STNM		Alphanumeric station name
TA	ta	Start time (day of year)
	tc	Time of computed point
TANMU	tan µ	Tangent of angle μ
TD	$\mathbf{t}_{\mathbf{d}}$	Prediction time in days
TDECS	tan δ⊙	Tangent of declination of sun
TE	t _e	Stop time (day of year)
TF	t_f	Prediction time (fraction of day).
THETG	θG	Sidereal time at Greenwich at prediction time in degrees
THETO	Θ_{O}	Sidereal time of Greenwich at start of year
THETST	θst	Sidereal time at station
THTGT	θ(t)	Sidereal time of Greenwich at time t
TO	$\mathtt{T_o}$	Day of year of epoch
TOD	t _o	Integral day of year of epoch
TOF		Fractional day of epoch
TPHIP	tan φ'	Tangent of geocentric latitude of station
TRA	tano	Tangent of right ascension of predicted sighting
v	v	True anomaly
w	ω	Argument of perigee at epoch
WDDOT	1/2 ₺	$1/2$ second derivative of ω in deg/day ²
WDOT	ώ	First derivative of ω in deg/day
x	x .	x coordinate of station in fixed system
XAZ	$\mathbf{A}\mathbf{z}$	Azimuth of object.
XBAR	x	x coordinate of station in fixed system
YCDL	Δλ	Difference in longitude from station to search point.

XCGAM	Υ	Intermediate quantity used in computation of SMUO
XDECS	$^{\delta}\odot$	Declination of sun
XI	ξ	Angle & intermediate
XIA	I	Illumination angle
XISP	i_{sp}	Intermediate quantity used in computing CDL
\mathbf{x} L	λ	Longitude of station
XLSUN	$^{\mathrm{L}}\mathrm{o}$	Celestial longitude of sun at beginning of year
XRASUN	a⊙	Right ascension of sun
XTHETG	θG	Sidereal time at Greenwich at prediction time in radians
XZD	β	Zenith angle
Y	у	y coordinate of satellite
YBAR	y	y coordinate of station in fixed system
YLSP	$^{\lambda}_{ exttt{sp}}$	Longitude at the search point
YR	- F	Year of epoch
Z	q	z coordinate of satellite
ZBAR	$\frac{-}{z}$	z coordinate of station in fixed system
ZDEC	δ	Declination of satellite
ZMUO	μ ο	Argument of latitude of satellite in orbit plane
ZOMG	$\Delta\Omega$	$\frac{\Omega}{\text{sp}} - \frac{\Omega}{\text{t}}$
ZRA	a	Right ascension of satellite
ZRAGC	αgc	Right ascension of satellite

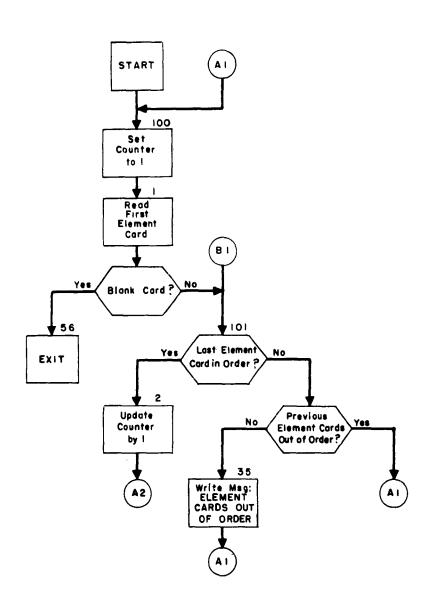


(A2) Read Remainder of Element Set

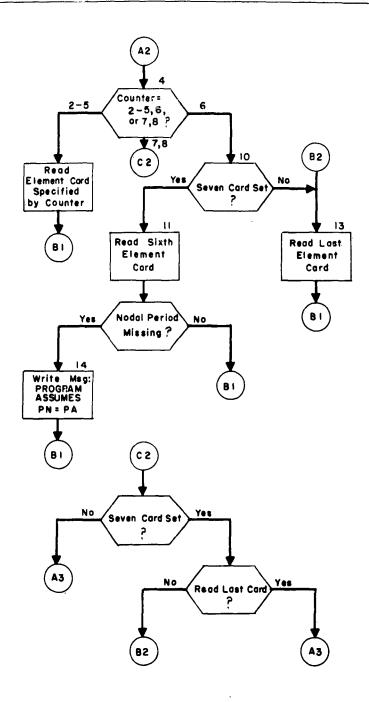

KEY:


- (B) Read Next Element Card
- (A3) Read Station Card

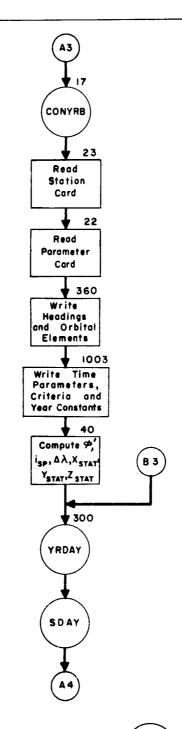


Convert Smithsonian Day

Convert Smithsonian Day

to Gregorian Date

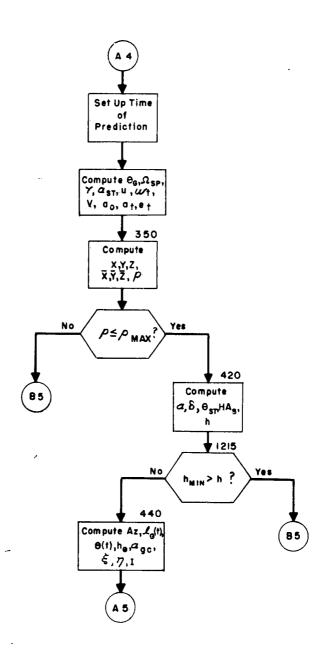

- (A5) Output Predictions
- (25) Increment Time

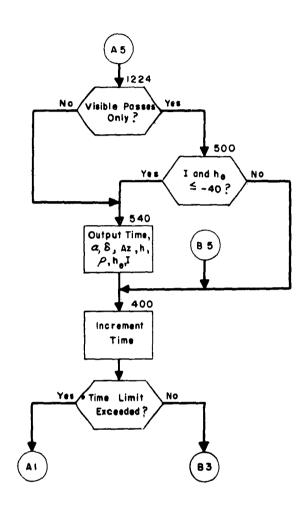

- (A) Returns to Start of Program
- B3 Computes Next Position

12.1 ASUM, Observation Acquistion File Summary

12.2 Function

This program will provide a complete listing of the current Observation Acquistion File.

12. 3 Input

The input is comprised entirely of the information written on the A-File of the SEAI tape.

12.4 Output

The output consists of the sensor information required to obtain look angles for a given satellite. The output is sequential according to satellite number and includes the following:

Satellite number

Sensor number

Sensor name

Pass code (all or visual)

Format request (short or complete)

Type (all, 3-point, Baker-Nunn.)

Minimum azimuth

Maximum azimuth

Minimum elevation

Maximum elevation

Maximum range

Grid, or step, size in minutes

12.5 Processing

The program reads the Sensor File to obtain the required sensor information. The Acquisition File is then located and decoded. Sensor information is retrieved from the sensor storage area when the need arises. If the information is not available the following message is printed:

NOT IN FILE

The data is written onto the output tape under control of counters which allow fifty lines of output per page. Output is single spaced. It is in satellite number order and in the sensor number order called for by the Acquisition File. A double space separates the satellites.

12.5.1 Error Messages

When tape reading difficulties occur the following message will appear on the flexo:

TAPE TROUBLE

TYPE GO TO RETRY JOB. TYPE STOP TO TERMINATE.



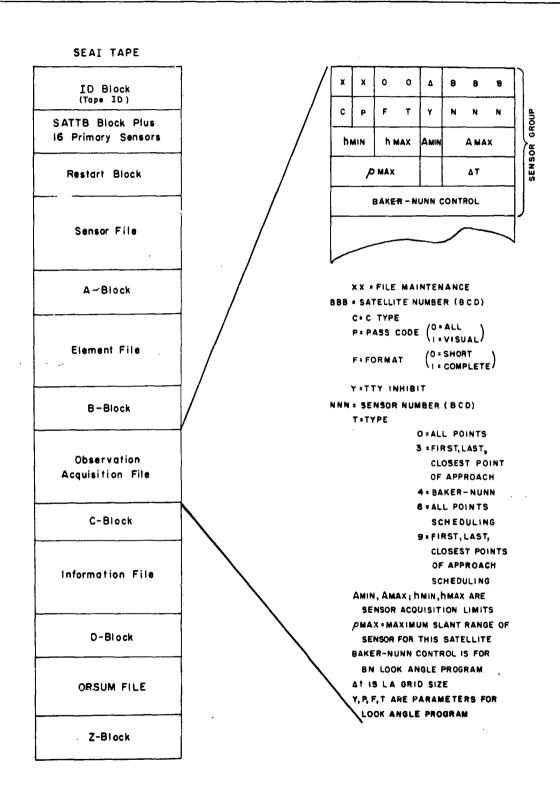


Fig. 12.1

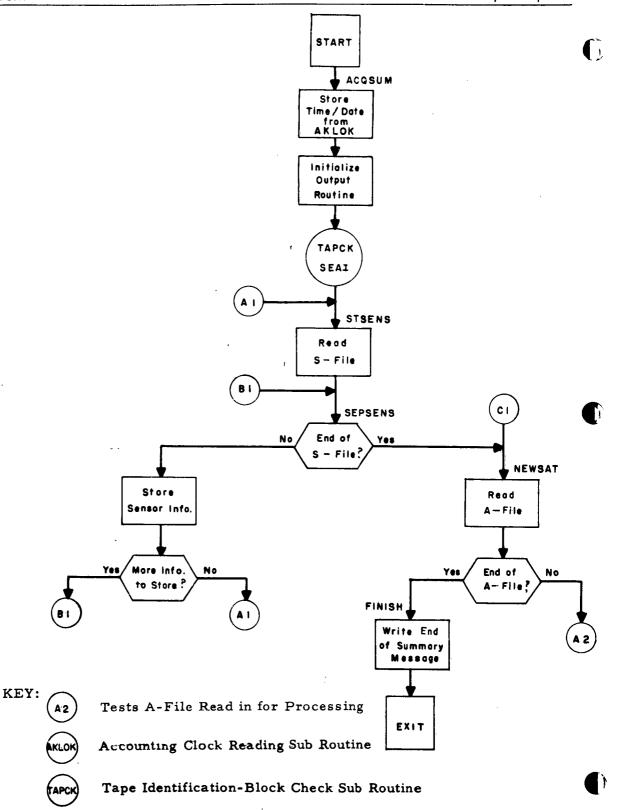

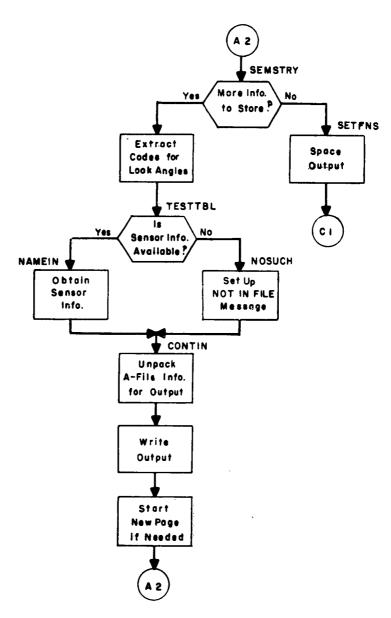

KEY: c: Returns to Read More from A-File

13.1 SSUM, Sensor File Summary

13.2 Function

This program prepares a complete listing of the Sensor File.

13.3 Input

The input is comprised entirely of the Sensor File willien on the SEAI tape.

13.4 Output

A listing of the sensor data contained in the S-File is provided. The following information is included as part of the output:

Sensor number

Sensor name

Latitude in degrees

Longitude in degrees

Height in earth radii

X/cos θ or - (C+H) cos θ in earth radii

Z or -(S+H) sin φ in earth radii

Accuracy digit for azimuth, elevation and range

Classification code

Sensor type

13.5 Processing

The SEAI tape is read to locate the Sensor File. After locating this file the program reads 1386 words into core storage. If the ending sentinel is found before the buffer area is filled, the program will process as much information as it has been able to retrieve. If more information is still to be read from the Sensor File the program returns for a second pass after processing the first buffer full of data.

Counters are used to provide for nine groups of five sensors for each page of printed output. Headings and a page count are written on the top of each page. The order of the S-File determines the order of the printout.

G

c


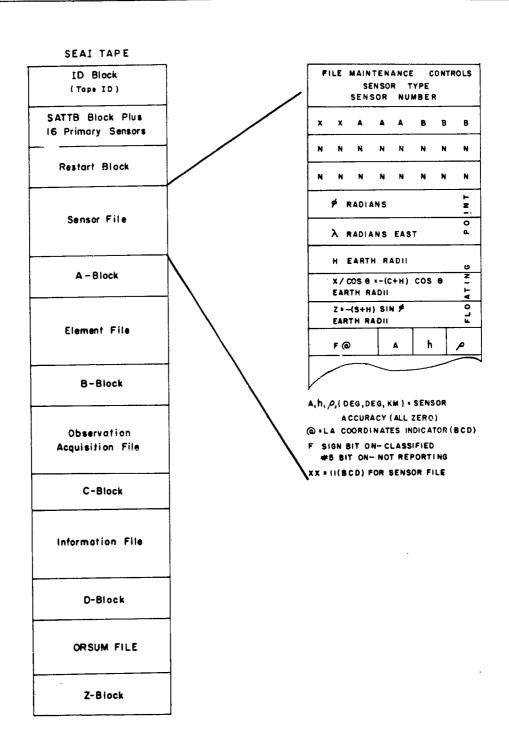



Fig. 13.1

the walk of the walk of the state of the sta

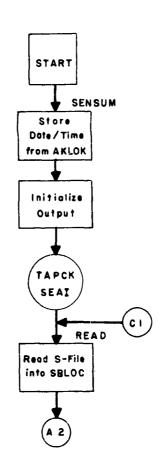

KEY:

Processes Information Contained in S-File

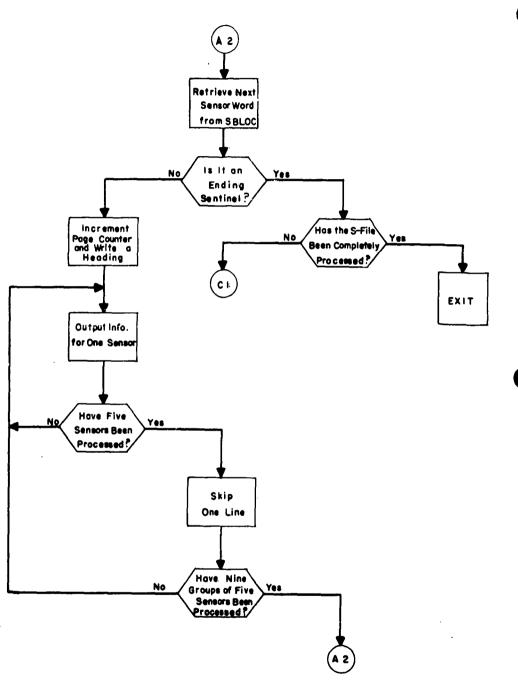

KEY: Read More Information from S-File

14.1 ISUM, Information File Summary

14.2 Function

The program generates a listing of all or specified sections of the Information File of the SEAI tape. A "box score" or tally of the number of satellites still orbiting can be obtained.

14. 3 Input

The input consists primarily of the I-File of the SEAI tape. Control cards included in the Job deck contain the information required to set up the options available in the program. The following data is punched in cols. 1 - 3:

- a) ALL used to obtain a complete listing of the I-File.
- b) BOX used to obtain a tally of the number of satellites orbiting.
- c) NNN a three digit satellite number for each satellite, required if the ALL option is not used.
- d) END this signals the end of the control data and is always required.

14.4 Output

The I-File of the SEAI tape is written for off-line printing. Information printed out includes:

Satellite number

Satellite name

Launch date

Launch site

Booster country

Payload country

14.5 Processing

The control information described in the input section is read from the system data tape (logical zero). If all satellites are requested, the entire I-File is read and prepared for output purposes. If individual satellites are requested, then the I-File is scanned and only the information desired is written onto the output tape. If a box-score of the orbiting satellites is called for, then this is written out following the printout of the I-File.


14.5.1 Error Messages


If irrecoverable tape errors are encountered while reading the SEAI tape the following message is written on the Flexo:

PROGRAM TERMINATED DUE TO POOR BLOCK MARKS, SPROCKET ERROR, S1 OR S2 ERROR, OR DISABLED UNIT ON LOGICAL 4.


A parity error will cause a single reread and a second failure will result in the program issuing a minus one read order with the following comment:

MINUS ONE READ ORDER ISSUED TO OVERRIDE PARITY ERROR

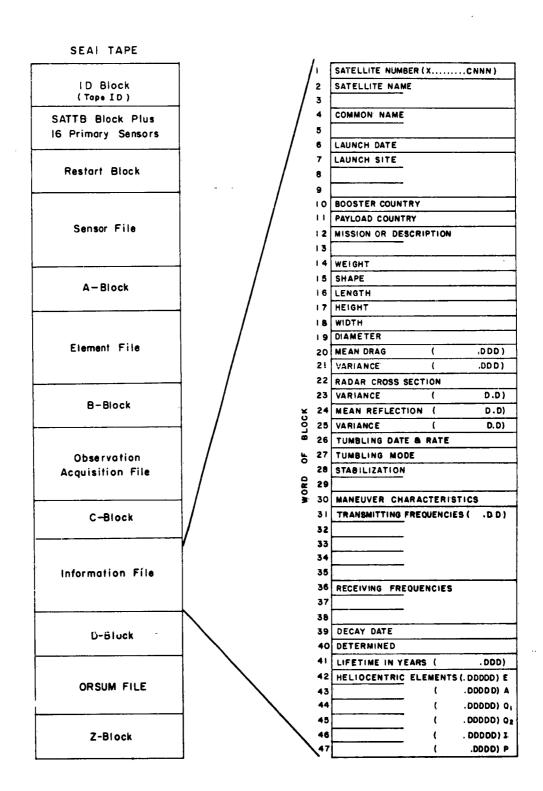

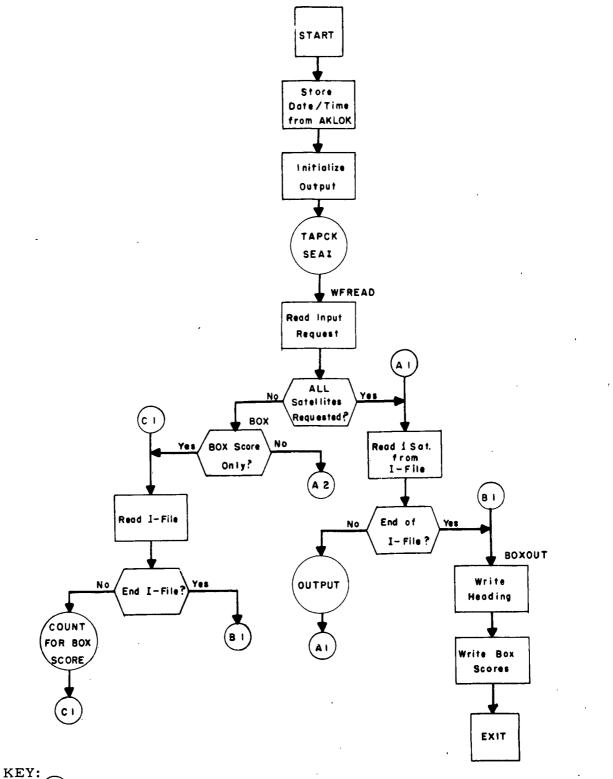

Read Information from I-File for Requested Satellites

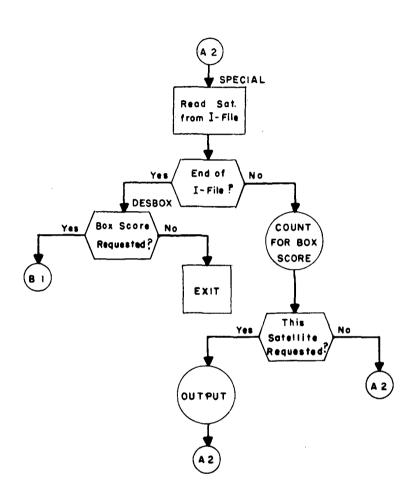

KEY:

Output Box Score and Exit

0

(Subroutine Output)



15.1 <u>TELTYP</u>, Magnetic Output Tape to Teletype Tape Conversion

15.2 Function

The TELTYP Program is used to convert an output tape, written by other programs, to Baudot code. The magnetic output tape used as input to this program must contain the sentinels described in the input section. These sentinels are used to identify the messages to be converted by the TELTYP program. The output tape is searched for the beginning sentinels. Conversion then proceeds from BCD to Baudot code until an end of message sentinel is located. With the completion of one message, succeeding units are sought, identified and converted.

After completely processing the input tape the TELTYP program writes the teletype code onto the input tape. This new information follows the last output previously written onto that tape. A special data select character is used to mark this output as information to be punched from magnetic tape to 5-level paper tape via the Universal Buffer Controller (UBC).

15.3 Input

Input to the TELTYP program is comprised entirely of the output tape (logical 11) previously written by any one program, or several programs, processed by the computer.

The TELTYP program must be called upon to perform its function immediately following the programs desiring this optional output. The output tape must not be wrapped up or rewound by the operator or system under which the programs are functioning. If the tape has been rewound, the teletype conversion will not be performed and a message will be written on the Flexo indicating the status of the input tape.

The following sentinels will be searched for on the input tape which must be addressable as logical tape 11 (eleven):

- 1. Data select 1
- 2. 14 B's

1

- 3. * \$
- 4. A block of U's.

15.3.1 Description of the functions of the sentinels.

1. Data select one

This sentinel is searched for at the beginning of each line on the input tape. If a data select one character is found, printed output is assumed and the processing continues. If any other data select character is present, other types of output are indicated and the line is ignored. The next line is then brought in for processing.

2. BBBBBBBBBBBBBBB (14 B's)

This sentinel marks the beginning of a message to be processed into Baudot code. There will be as many sentinels of this type on the input tape as there are messages to be converted.

3. * \$ (an asterisk followed by a dollar sign)

This signals the end of the message being converted. The message is wrapped up when this sentinel is found and the sentinel described under 3.1.1 is then searched for by the program.

4. 128 words (1 block) of U's

This sentinel is written on the input tape by the TELTYP program itself before the input tape is rewound and processing is started. It signals the end of the input tape and all processing ceases once it has been found.

When this sentinel has been located the program will rewind the intermediate tape used to store teletype output and copy its contents onto the input tape. The program then exits to the executive program.

15.4 Output

The output consists of the required conversion to Baudot code and is written on logical tape 11 (eleven) following the information previously written on that tape. Processing of other

programs requiring tape 11 (eleven) for output, but not requiring teletype conversion, can follow the termination of this program.

The 5-level paper tape output can be obtained through use of of the UBC if data select 4 is used.

15.5 Processing

The TELTYP program first tests the input tape to determine if data is available for conversion to Baudot code. If the tape is in a rewound status a comment is made on the Flexo and control is returned to the executive program.

After it has been determined that data is available, a block of U's are written on the tape following the last piece of information recorded. The tape is then rewound and processing starts.

A search is made for an output line of information written under data select one. Once this requirement has been met, an attempt is made to locate the second sentinel (14 B's). If the B's are not located the program returns to the search for data select one. If the B's are located before the end sentinel (one block of U's) is reached, conversion of the message which follows is initiated by the setting of a logical switch.

In converting to Baudot code each character is examined. Numeric and alphanumeric characters are converted directly upon entry to a dispatch table. The appropriate shifts are determined and placed in the output buffer as required. Illegal characters are treated as blanks and a space code is supplied to the output buffer. Line feed can be called for by the insertion of an 8-5 punch (octal 15). Two carriage returns and a line feed are supplied by the program at the end of each line of information. An octal 32 (asterisk) is treated the same as any end-of-line indicator (octal 77). Each new line is examined for the data select one character.

The character by character evaluation and conversion continues until an end of message indicator is met. Two indicators are used: (a) an asterisk followed by a dollar sign, or (b) an absolute stop code which normally signifies the end of an output

tape. The message will be terminated by either signal. Letter shifts will be used to fill out the output area and an end of message indication will be given to the operator via the Flexo. The program then returns to search for the next message on the input tape.

This process continues until the block of U's is found. At that time the intermediate tape, which is used to store the converted message, is rewound and copied onto the input tape. The block of U's is written over by the information being added to the tape. An exit is then made to the executive program.

15.5.1 Error Indications

- 1. The following messages will be typed on the Flexo and a return will be made to the Exec.:
 - (a) TAPE FOR STANDARD TTY CONVERSION ALREADY REWOUND. JOB TERMINATED.
 - (b) NON-RECOVERABLE ERROR IN READING INPUT TAPE.

 UNABLE TO RESTORE TO ORIGINAL POSITION. REMOVE
 WITHOUT WRAPUP. JOB TERMINATED.

The first message was discussed under the input and processing sections. The second message is self-explanatory.

- 2. Other error messages are as follows:
 - (a) SUBROUTINE ERROR EXIT FROM OCTAL

 LOAD COMPACT INTO UPPER CORE AND TAKE DUMP.

This comment will be made only if the computer jumps to location zero or three. A stop-go option is given. Go will send control to the executive program. Stop will print out the message again. The operator is requested to give a dump only if the computer is in a non-interruptable mode.

(b) ERROR IN READING INPUT TAPE.

TYPE GO TO ACCEPT OR STOP TO

TERMINATE.

This is typed out whenever parity or sprocket errors are encountered.

(c) BAD INTERMEDIATE TAPE. CHANGE TAPE AND TYPE GO.


Converted messages can be lost when the tape change is made.

(d) SCRATCH OR INPUT TAPE DID NOT REWIND,
TYPE GO TO TRY AGAIN OR STOP TO
TERMINATE JOB.

This message is self-explanatory.

(e) EM

This indicates that the end of message indicator has been encountered.

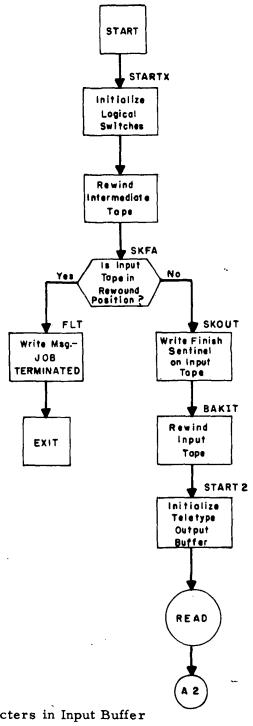


KEY:

Test Characters in Input Buffer




Fill Input Buffer from Input Tape

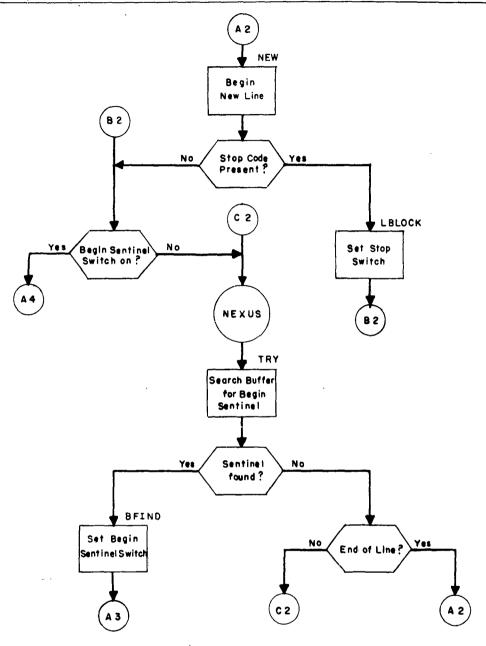


KEY:


Retrieve Next Character from Input Buffer

- A 3 Test for End of First Line
- (A4) Convert Character to Teletype Code

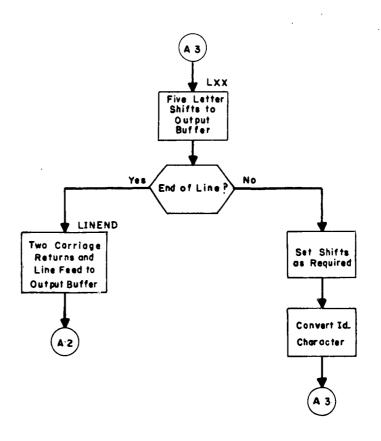

KEY: Begin New Line

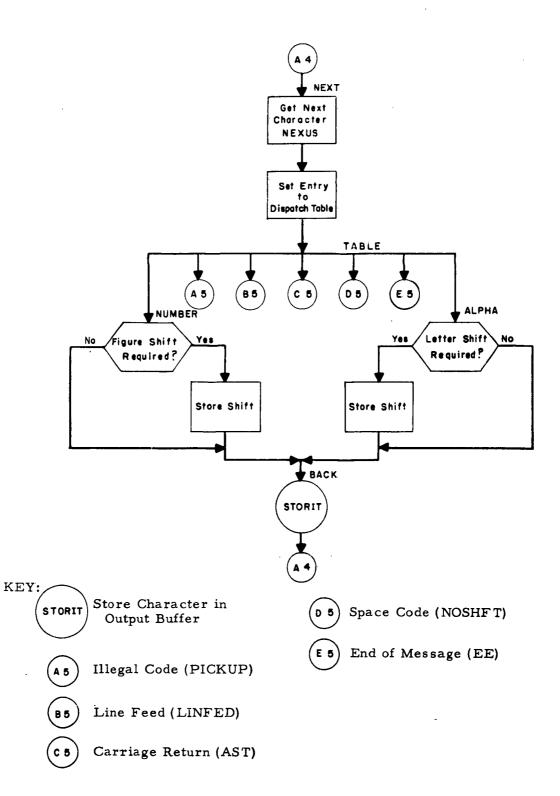


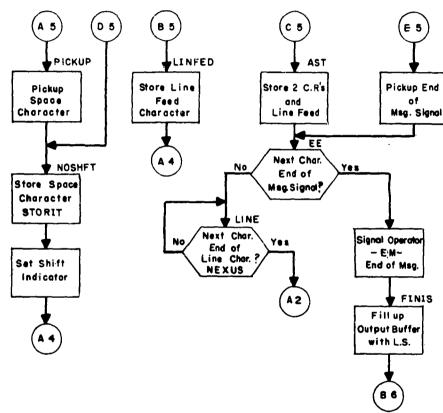


KEY:

- A2) Begin New Line for Conversion
- (A 4) Process Next Character
- (8 6) Write Output Buffer


(Subroutine Storit)



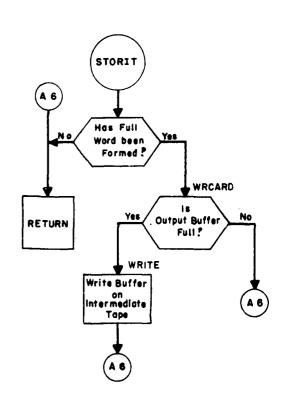

KEY:

(c2) Search for Start of Next Msg.

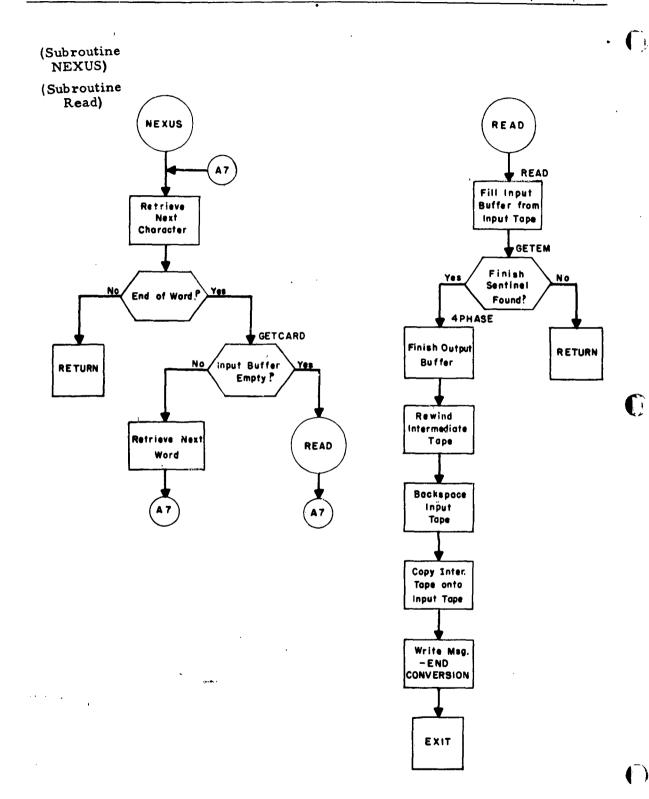

16.1 BMEWSPT, BMEWS Paper Tape Conversion

16.2 Function

BMEWSPT scans output messages from the DIP computer in search of possible SPADATS messages. Other messages of variable length are ignored. Any possible SPADATS message is examined for consistency. If the message appears to be valid, certain control bits are stripped, and the message is converted to standard observation format and put out as a binary tape. This binary output tape is in the format of a system $TTY\Delta IN$ tape and is used as direct input to ORCON.

16.2.1 Definitions

The following terms will be used throughout the BMEWSPT description:

- BMEWS Character The format of this character changes during preparation of magnetic input tape. See BMEWS word. It originally consists of 6 information bits preceded by a parity (P) bit during transmission to SPADATS.
- BMEWS Group Consists of three 24 bit BMEWS words (input tape format). There are three BMEWS groups in a SPADATS message.
- BMEWS Message Any message output by the DIP which may or may not be a SPADATS message.
- BMEWS Word Consists of three BMEWS characters. The format of a BMEWS word changes during preparation of the magnetic input tape. Details appear in that section. The format of a BMEWS word is shown in Figure 16.1.

Fig. 16.1

BMEWS Word Bit Number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Chad-less Paper Tape	¥ p	I	I	I	I	I	I	¥	I	I	Ι	I	I	Ι	*P	Ι	I	I	I	I	I			
Five Channel Paper Tape	P	E	I	I	I	Ι	I	I	I	I	Ι	I	I	I	I	Ī	I	I	Ι	I				
Input Tape	S	P	Ε	I	I	I	S	I	I	I	I	1	S	Ι	I	I	I	I	S	I	I	I	I	I

- Chad-less Paper Tape Original paper tape received by SPADATS from the DIP. BMEWS words appear as three 7 bit characters. Control Bit An S. P. or E bit.
- DIP Computer used to process all BMEWS data. Q-point data (observations) are outputted on chad-less paper tape and

are detected between the DIP and SPADATS.

- received by SPADATS.

 E-bit Error bit. The second bit of the 20 bit BMEWS word appearing on five channel paper tape. Set to one if transmission errors
- Filler Words Philco 8 character words of all filler characters (32)g.
- Five Channel Paper Tape Intermediary between chad-less paper tape and magnetic input tape. BMEWS words appear as four 5 level characters.
- I-bit-Information data bit. Any bit contained in a SPADATS message. except for control bits.
- P-bit Parity bit. The first bit of the 20 bit BMEWS word appearing on five channel paper tape.
- P -bit Parity bit. Original parity bit associated with a BMEWS character.
- S-bit Sixth level bit. The sixth level (most significant) bit added to each of the four 5 level characters on the five channel paper tape when preparing the magnetic input tape.
- SPADATS Message Three groups of three BMEWS words each of which contain Q-point data.
- TTYΔIN Tape System input tape for teletype data which is processed by ORCON Tape ID is 70TTYΔIN

TYPE 25 Standard Observation - Observation in standard format from a station using a moving beam antenna with T tracking capability. Data readout is automatic.

Zebra - Time - Greenwich Mean Time.

16.3 Preparing Magnetic Input Tape

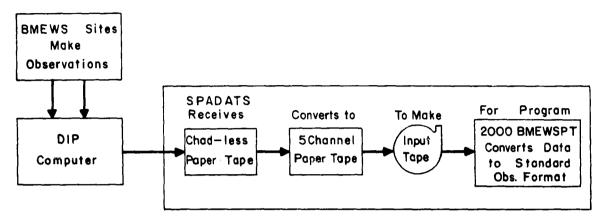


Fig. 16.2

SPADATS receives chad-less paper tape which is direct output from the DIP computer. The chad-less paper tape is converted by equipment to five channel paper tape by decoding BMEWS words.

BMEWS words are decoded into four 5-level characters. The P* bit of each of the three BMEWS characters is checked and deleted. The remaining 18 bits become the least significant of the 20 on the five channel paper tape. If the check of the P* bits detected transmission errors, the E-bit is set to one. A new parity bit is generated and becomes the P-bit. An odd parity for the 20-bit group results.

In preparing the input tape from the paper tape, the reader must be in 5-level binary mode. The equipment adds an S-bit to each of the four 5-level characters. Therefore, the required six bit character will appear in computer storage. At least one block of filler words must be added via the simulator.

16. 3.1 Zebra Time from Flexowriter

Since SPADATS messages do not contain the zebra year, month, and day of the Q-point data, these times must be obtained before conversion to standard observation format. Normally, there is a restriction that input data cannot be more than one day old. Then the year, month, and day may be obtained from the accounting clock. However, if the accounting clock is not working properly, or is set to local time, or if the input data is more than one day old, the correct zebra time must be obtained from the flexowriter.

The program first interrogates the accounting clock and converts the time to BCD. The time is typed out in the format of YR-MM-DD-HHMM ZEBRA. If the time is correct, the operator types a carriage return and the program starts processing the messages.

If the time is incorrect the operator types the requested YR-MM-DD-HHMM followed by a carriage return. The corrected time is then typed out for approval. See 16. 4.1-2 for further details.

16.3.2 Input Tape

A BMEWS word will appear on the prepared input tape and in computer storage as 24 bits. Since there are 9 BMEWS words in a SPADATS message, a total of at least 4 1/2 Philco words are required.

The input tape may or may not contain messages of varying lengths other than SPADATS messages. The program will ignore extraneous data. A SPADATS message consists of three BMEWS groups. Each BMEWS group contains 72 bits. The format of each group including control bits is illustrated in tables following this section. Note, however, that a BMEWS message in core does not necessarily start at the beginning of a Philco half word. The beginning character of a BMEWS message may be any one of the 8 characters in a Philco word, therefore, the program examines each character separately.

If the control bits are ignored a BMEWS message will appear on the input tape and in core storage as shown in Figures 16.3 and 16.4.

Group Number	Number Bits	Information Data	Representation or Data Range
i	3	SPADATS Identifier	IOO(Binary)
	3	Group Count	000(Binary)
	2	Site Number	01 or 10
]		(Binary)
	14	Sequence Number	0-16383
	5	Time — Hours	0-23
	6	Time – Minutes	0-59
	6	Time - Seconds	0-59
į	4	Time - Fractional Seconds	0-15/16
	5	Credence	Ignored
	6	No. Consolidated Reports	0-63
2	3	SPADATS Identifier	IOO(Binary)
	3	Group Count	OOI(Binary)
	2	Site Number	OI or IO
	14	Sequence Number	0-16383
	ı	Azimuth Sign O=+, t=-	O or I
	2	Radians	0-3
	14	Fractional Radians	0-1
	1	Range Rate Sign 0=+, = -	O or I
	3	Nautical Miles Per Second	0-7
	11	Fractional NM/Sec	
3	3	SPADATS identifier	IOO(Binary)
	3	Group Count	OIO(Binary)
	2	Site Number	01 or 10
	14	Sequence Number	0-16383
	12	Range Nautical Miles	0-4095
	l l	Fractional NM	0 or 5
	2	Elevation Angle Radians	0~3
	14	Fractional Radians	0~1
	3	Blank	OOO(Binary)

Fig. 16.3

Group																			•	Total Bits
Total No. Bits		2	*					24							3	24				72
Control Bits	SPENS		8	S	SPE			s		8		SP	E	1/8		8		S		<u>se</u>
No. Information Data Bits	3	3 2	2	2		3			4	22	23		3		4	4	=		5	54
Information Data	SPADATS Group ID Count	Wp Site		Sequence Number	Numbe	يا	-	Time Hours	 	Time Minutes		Time Seconds	• p	P. S.	Fract. Secs.	Credence Reports	2 5	Conso	No.Consolidated Reports	

Group 2																													Bits
Total No. Bits				24	get-							`	74										24						72
Control Bits	SPE	2		S	5	S	S	E E		15			5		S		S	PE		S				<u> </u>		S			~
No. Information Data Bits	3	2		2	2		-// -		3		- 2			5		5	///		2			33			55,		ري ا		54
Information Data	SPADATS Group Site	S Group Site	<u> </u>	÷ è		Seque	Sequence Number	Jump	_		,	/zin	# = = = = = = = = = = = = = = = = = = =	Azimuth Sign, Integer, Rodians Fractional Radians	± 6	eger, Rodi	5 8	bi bi	\$		2	nge 7.	Ra oct	te Si ional	Range Rate Sign, NM/sec, Fractional NM/sec.	Z Z	2 3	ပ္ခ်	

Group 3								Ł			- 1						ŀ		- 1				1				ŀ			2∞	Bits
Total No. Bits				24									24										-	24							- 21
Control Bits	SPE	//s		8		S		<u>S</u>	W W		S		S			1/2	19	SPE			S			S			S				∞
No. Information Data Bits	3	3	2		5		5			ю		4			25	2	 (_	2			2			S.		2	33		42
Information Data	SPADATS Group Site	Group Site Count No.	S. S.		S	Sequence Number	N P	Ē	\$			Rg.	Fro	Maut	Range Nautical Miles Fractional NM	Z Z			Ü	N P	tion ICti	A C	- B	adi.	Elevation Angle Radians, Fractional Radians	·	,		Blank	¥	

Fig. 16.4

16.4 Output

BMEWSPT output is a magnetic tape containing Q-point data converted to standard observation format. The output tape is in the system $TTY\Delta IN$ tape format described below and is suitable for input to ORCON. Unused portions of all blocks are filler words.

70TTYAIN BEGINOBS Q-point **Observations ENDOFOBS** ENDADATA ZZZZZZZZ

The first word of the first block is the tape ID, $70\text{TTY}\Delta\text{IN}$. This indicates to the executive routine that the tape is an ORCON input tape.

The first word of the second block is the ORCON control word BEGINOBS. This indicates to ORCON that the following input will be in standard observation format.

The Q-point data converted to type 25 standard observations are written 12 observations per block. There are no restrictions on the number of blocks used for the observations which are all classified unknowns.

The first word of the second to last block is the ORCON control word ENDOFOBS. This is a signal for ORCON indicating the end of the standard observation input.

The first word of the next to last block is the ORCON control word END \triangle DATA. This indicates to ORCON that there is no more input from the TTY \triangle IN tape.

The last block contains 120 words of Z's

Each generated observation will occupy the equivalence of ten Philos computer words on the output tape. Each observation will be in the standard observation format shown in figure 16.6.

Philco Word		_			2	3	4		5	9
Card Columns 1-3 4,5 6-9 10 11-15	1-3	4,5	6-9	으	11-15	16-24	25 – 30	25-30 31-37 38-44	38 – 4	4
No. BCD Characters	3	3 2	4	_	2	6	9	7	7	
Information	Sat. Type	Type	Station C	∢ ∪∪	A C C Date	Time (Z)	Elevation	Elevation Azimuth	Slant Range Km.	Æ.
Representation -00 25 xxxx to YMMDD or Data Range	- 00	25	XXXX	ဝဍ တ	DOWNY	HHMMSS.sss	D D. dddd	DDD. dddd	KKKK.kk	*

Philco Word		မ	7	 	80	6	9	
Card Columns		45 -	45 - 53				73 - 78	
No. BCD Characters			6				9	
Information		Rang	Range Rate KM/Sec.				Sequence	
Representation or Data Range		K K	KK. KKKKKK				XXXXX	

Fig. 16.6

16.5 Processing

BMEWSPT obtains the zebra year, month, and day of observation from the accounting clock and/or from corrections entered via the Flexowriter. The two header blocks containing the tape identification 70TTYAIN and the ORCON control word BEGINOBS as their first words respectively are written on the output tape. The input data is then transferred to the data storage area. If the data storage area does not contain any zero characters, the message, "MAY BE CODE MODE" is typed on the Flexo. This indicates that the input tape may have been prepared from the five channel paper tape under code mode, which ignores blanks, rather than binary made which converts blank paper tape to zero characters. This is only a possible error message.

The program then searches for a SPADATS message. Each character in core is examined until one is found which has 100 as the last three bits. This is tentatively assumed to be the SPADATS identifier. The next three information bits are checked and should indicate the first group count, 000. If they are, the bits corresponding to the SPADATS identifiers and group counts for the second and third groups are examined. If they agree with the expected values, the site and sequence numbers from the first group are compared with the corresponding values in the second and third groups. If there is agreement and if the site number is 1 or 2, it is assumed that a SPADATS message has been located. If any test fails, the search for the SPADATS identifier continues with the character following the original character with 100 as its last three bits.

After a SPADATS message is found, the Q-point data is converted to a type 25 standard observation. The sequence number is converted to BCD. The site number is converted to station number by a table look up. The zebra time is converted to BCD. Year, month, day are obtained from the accounting clock or Flexowriter while hours, minutes, and seconds are obtained from the Q-point data. The credence is ignored.

The number of consolidated reports is used in the determination of the accuracy. The first three of the six bits form a binary number, 0-7. This number is subtracted from 7 to give the accuracy. A resultant accuracy of 0 corresponds to a large number of reports. An accuracy of 8 or 9 may result from the detection of one or more parity errors, respectively. An error count is made up of the sum of the 9 E-bits and the number of bad parity checks. A non-zero error count results in an 8 or 9 accuracy.

If the azimuth is positve, there is a direct conversion from radians to circles. If it is negative, the magnitude is substracted from 2π and converted to circles.

Elevation is converted to circles. If the result is greater than 0.25, one-half circle is added to the azimuth and the elevation is subtracted from 0.5. The resultant elevation and azimuth values are converted to degrees.

Range and range rate are converted to kilometers and kilometers/second respectively. Because the output range rate has nine characters, the integer and fractional parts are processed separately.

The resultant observations are written out on the output tape, 12 observations per block. After all data has been processed, and all observations written on the output tape, two blocks containing the ORCON control words ENDOFOBS and ENDADATA as their first words respectively are written on the output tape. The last block written on the output tape contains 120 words of z's. The output tape is now ready to be processed by ORCON.

16.4.1 Flexowriter Messages

1. MOUNT SCRATCH ON UNIT 7 AND INPUT ON UNIT 0.

This message is typed at the start of the program. After typing this message, the program goes to the STOP-GO routine. The program will begin when the operator types GO.

2. YR-MM-DD-HHMM ZEBRA

The zebra time at the start of the program is typed for the operator's approval. One or more of the zebra groups may be altered by the operator. The groups are separated by hyphens. See 16.3.1.

a. TRY AGAIN

This message is typed if the operator makes an error in typing in the requested time. Program waits for another type in of the time and retests.

b. ILLEGAL DATE-TIME. RETRY

Typed if an illegal group in the zebra time is found such as a month > 12. The operator will then type in a new zebra time which will be tested.

3. WRITE ERRORS

READ ERRORS

PROC ERRORS

Appropriate comment is typed if tape errors occurred and could not be corrected. Control returns to the executive routine after typeout.

4. INPUT MAY BE CODE MODE


This message indicates that the paper tape may have been converted to the magnetic input tape under code mode instead of binary mode. The program tests one block for zero characters. If no zero characters are found, the above message is typed on the Flexo. The program then continues normally.

Punched card output, if specified, is under control of a PATH switch which eliminates multiple punching of the same ephemeris data. This switch also controls the production of an ephemeris tape from a set of ephemeris cards. This switch equals one (1) for the first time through the program, for a particular set of ephemeris data, and two (2) for each subsequent pass through the program for this same data. It can be reset to one by reading a negative station number. Thus ephemeris cards are punched, or an ephemeris tape made, only on the first pass through the program for that particular set of ephemeris data.

9.5.1 Error Message


If the program is unable to read the ephemeris tape, the comment EPHEMERIS TAPE TROUBLE will be written on the output tape. In addition, the comment PROGRAM TERMINATED DUE TO EPHEMERIS TAPE TROUBLE will appear on the Flexo, and control will return to the executive routine.

C

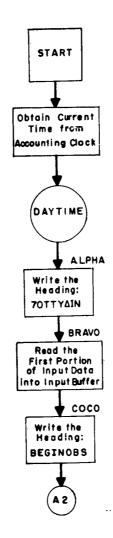

KEY:

Beginning of Processing

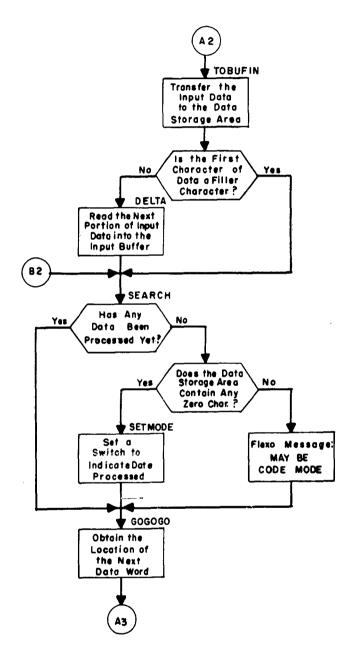



KEY:

A3

Control of the same of the control of the same of


Detailed Examination of the Data Word

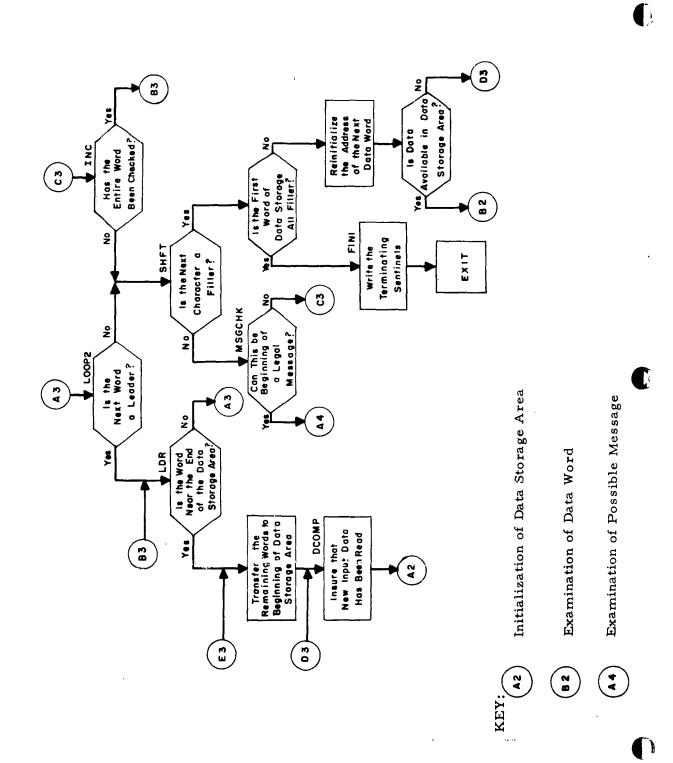

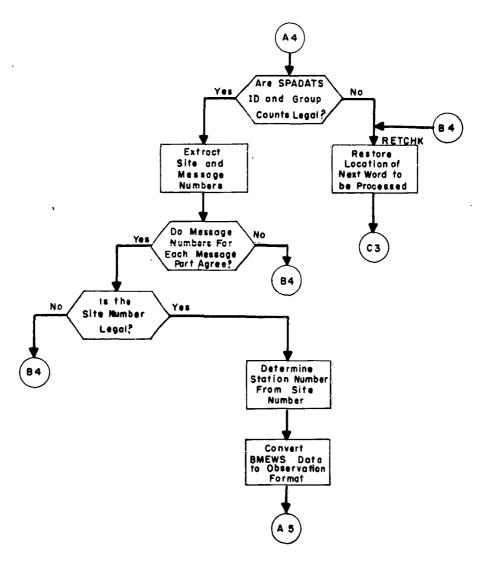

KEY: (A5) Preparation for Output

(c3) Resumption of Detailed Examination

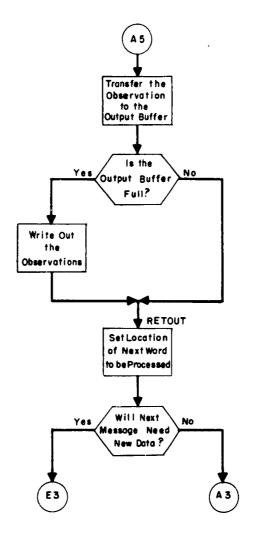


KEY:

Detailed Examination of the Data Word

(E3) Transfer of New Data to Data Storage Area


(Subroutine Daytime)

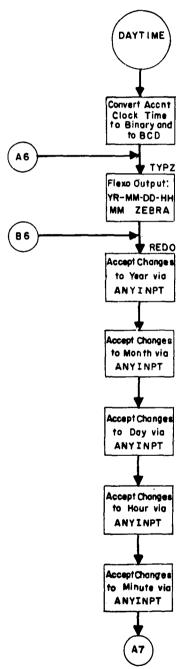

KEY:

A7 Examines Changes Entered

(Subroutine Daytime)

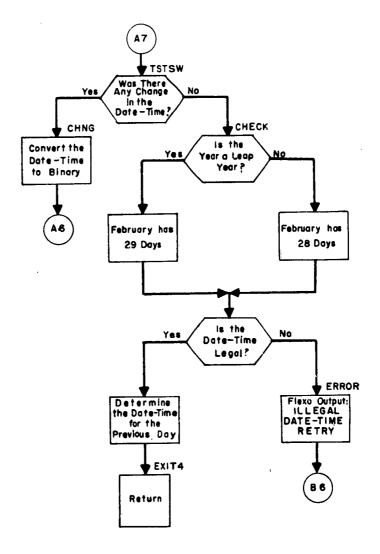


KEY:

(A6) Output of Date-Time to Flexowriter

(86) Acceptance of New Date-Time from Flexowriter

(Subroutine ANYINPT)

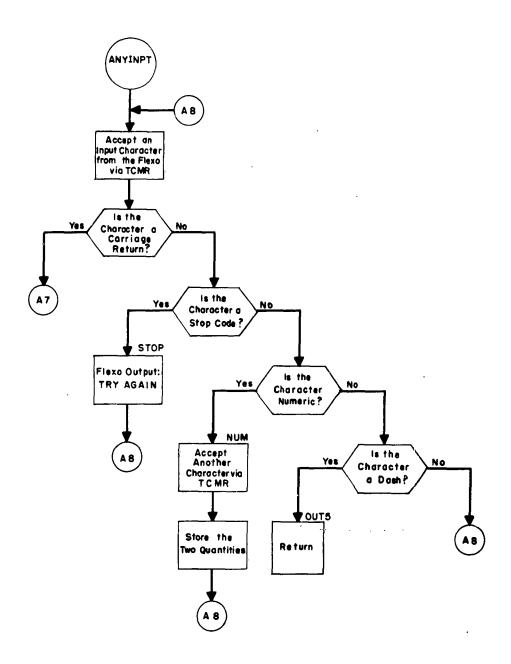

KEY:

Returns to DAYTIME

SECTION 2 SUBROUTINES AND FUNCTIONS

This section contains descriptions of subroutines and functions which are used by many of the programs described in Section 1. All, with the exception of XYZSB, have been written with the linkage required by FORTRAN or ALTAC. The description of XYZSB, which was written by Aeronutronic, a division of the Ford Motor Company, has been included to serve as a convenient reference within this volume.

The functions described are used to perform intermediate calculations and produce a single valued result. The subroutines perform a series of calculations and may produce more than one result.

Number	Name	Title	Type
1	CONYRB	Obtain year constants	S
2	NHOLY	Remove overpunch (fix. pt.)	F
3	PROPR	Properize argument (0 to 2π)	F
4	SDAY	Gregorian date from Smithsonian day	S
5	SHOLY	Restore Hollerith sign	F
6	SMITH	Obtain theta Greenwich	F
7	UNHOLY	Remove overpunch (flt. pt.)	F
8	YRDAY	Convert to Smithsonian day from yr., day of yr.	s
9	YRMDY	Convert to Smithsonian day from yr., mth., day	s
10	XYZSB	Analytical integration routine	S

1.1 CONYRB, Year Constants (Subroutine)

1.2 Purpose

CONYRB is used to obtain Theta Greenwich, the celestial longitude of the sun, and the difference between the longitude of the sun and the argument of perigee of the sun at the start of a year.

1.3 <u>Use</u>

Call CONYRB (IX, X1, X2, X3, X4, X5, X6, X7, X8)

1.4 Input

IX must be a fixed point integer equal to the last digit of the year. No further arguments are necessary for entry to the subroutine.

1.5 Output

Upon exit from the subroutine, the arguments represent the following constants:

- IX (Fixed point) = last digit of the year.
- X1 (Floating point) = year.
- X2 (Floating point) = Theta Greenwich at start of year.
- X3 (Floating point) = celestial longitude of the sun.
- X4 (Floating point) = .017202789
- X5 (Floating point) = difference between the longitude of the sun and argument of perigee of the sun.
- X6 (Floating point) = .0334502.
- X7 (Floating point) = .043053055.
- X8 (Floating point) = .43365539.

- 2.1 NHOLY, Remove Hollerith Overpunch (Function)
- 2.2 Purpose

NHOLY is used to remove an overpunched sign and to convert the argument to the absolute value of the fixed point integer.

2.3 Use

NHOLY (IX)

2.4 Input

The argument (IX) contains any left justified BCD character which may include an overpunched sign.

2. 5 Output

NHOLY yields the absolute value of the fixed point integer contained in the left most BCD character of the original argument.

- 3.1 PROPR, Properize Argument (Function)
- 3.2 Purpose

PROPR is used to properize an angle, i.e., find the value of the angle between 0 and 2π . If x is any angle in radians, PROPR = [X] (0, 2π)

3.3 Use

PROPR (X)

3.4 Input

The angle (X) must be in floating point radians. There is no restriction on its value.

3.5 Output

PROPR yields the value of the angle (X) in the range $0 \leq \ x < 2 \, \pi.$

- 4.1 SDAY, Gregorian Date from Smithsonian Day (Subroutine)
- 4. 2 Purpose

SDAY is used to convert the Smithsonian day number to Gregorian day, month, and year.

4.3 Use

Call SDAY (SDATE, YEAR, YRDATE, MO, HMO, DATE)

4. 4 Input

SDATE is the floating point Smithsonian day number. No further arguments are necessary for entry to the subroutine.

4.5 Output

Upon exit from the subroutine the arguments represent the following quantities:

SDATE (Floating point) = Smithsonian day number.

YEAR (Floating point) = year, i.e., 1963

YRDATE (Floating point) = day number in year.

MO (Fixed point) = month number.

HMO (Alphanumeric) = month (3 BCD characters) abbreviation, i.e., JAN.

DATE (Floating point) = day number in month.

4.6 Formulation

F = Smithsonian day -15018

$$y = \frac{F}{365, 25} + 1900$$

[x] = integer function of x

$$A = [365.25y + .9]$$

year day = F - A

If year day < 0, y = y - 1 recompute A and year day.

$$B = 365.25y + .9 - A$$

C
$$\begin{cases} = 1 \text{ if } B - 8 \ge 0 & (\text{leap year add 1 day}) \\ = 0 \text{ if } B - .8 < 0 \end{cases}$$

$$J = \text{year day} - 59 - C$$
If $J \le 0$, $h = 30$. 1; otherwise $h = 32$. 3 - C

month =
$$\frac{\text{year day}}{30.6}$$
 + 2

E = [30.6 month - h]

If year day \leq E subtract 1 from the month and recompute E. Otherwise day number in month = year day - E.

- 5.1 SHOLY, Restore Hollerith Sign (Function)
- 5.2 Purpose

SHOLY is used to interpret the original overpunched BCD argument in terms of an algebraic + or -.

5.3 Use

SHOLY (X, Y)

5.4 Input

SHOLY requires two arguments. The first argument (X) is the overpunched BCD character. The second argument (Y) is the unsigned value of the first argument (X) in floating point.

5.5 Output

SHOLY yields the signed floating point value of the second argument.

- 6.1 SMITH, Obtain Theta Greenwich (Function)
- 6.2 Purpose

SMITH is used to obtain Theta Greenwich in degrees for the start of the year.

6.3 Use

SMITH (X)

6.4 Input

The argument (X) is the last digit of the year expressed in floating point.

6. 5 Output

SMITH yields the proper Theta Greenwich (X) in degrees.

7.1 UNHOLY, Remove Hollerith Overpunch (Function)

7.2 Purpose

UNHOLY is used to remove an overpunched sign and to convert the argument to an unsigned floating point number.

7.3 Use

UNHOLY (X)

7.4 Input

The argument (X) contains any left justified BCD character which may include an overpunched sign.

7.5 Output

UNHOLY yields the absolute value of the floating point number contained in the left-most BCD character of the original argument. UNHOLY uses the function NHOLY.

- 8.1 YRDAY, Smithsonian Day from Year and Day of Year (Subroutine)
- 8.2 Purpose

YRDAY is used to convert the Gregorian year, and day number to Smithsonian day.

8.3 Use

Call YRDAY (YRDATE, YEAR, SDATE)

8.4 Input

YRDATE is the floating point day number of the year and YEAR is the floating point year, i.e., 1963.

8.5 Output

Upon exit from the subrouting the arguments represent the following quantities:

YRDATE (Floating point) = day number of year.

YEAR (Floating point) = year.

SDATE (Floating point) = Smithsonian day.

8.6 Formulation

[x] = integer function of x

y = year - 1900

A = [365.25y + .9]

d = day number of year

c = 15018, Smithsonian day number of January 1, 1900

Smithsonian day = A + d + c.

9.1 YRMDY, Smithsonian Day from Year, Month, Day (Subroutine)

9.2 Purpose

YRMDY is used to convert the Gregorian year, month, and day to Smithsonian day.

9.3 Use

Call YRMDY (MO, DATE, YEAR, SDATE)

9. 4 Input

MO is the fixed point integer month number, DATE is the floating point day number of the month and YEAR is the floating point year, i. e., 1963.

9. 5 Output

Upon exit from the subroutine the arguments represent the following quantities:

MO (Fixed point) = month.

DATE (Floating point) = day number of month.

YEAR (Floating point) = year.

SDATE (Floating point) = Smithsonian day.

9.6 Formulation

[x] = integer function of x

y = year - 1900

m = month of year

d = day of month

A = [365.25y + .9]

B = 365.25y + .9 - [365.25y + .9]

h $\begin{cases} = 32.3 \text{ if B} - .8 \ge 0 \text{ (leap year, add 1 day)} \\ = 31.3 \text{ if B} - .8 < 0 \end{cases}$

c = 15018, Smithsonian day number of January 1, 1900 Smithsonian day = [30.6m - h] + d + A + c.

10.1 XYZSB, Analytical Integration Routine

This routine was written by Aeronutronic. A complete description of the subroutine, including equations, appears in the Aeronutronic Publication U-1691, pages 4-78.

10.2 Farpose

XYZSB computes the predicted position, r, and velocity, \dot{r} , at some given time, t. The \underline{N} , \underline{M} orbital elements at some epoch time, t, must be supplied upon entry to the routine (c. f. Fig. 10.1).

10.3 Calling Sequence

TIXZ
$$\begin{cases} 10, 2 \\ 20, 2 \\ 30, 2 \end{cases}$$
JMP XYZSB

10.4 Input

Index register two (XR2) must be set equal to 10, 20 or 30 upon entry. The significance of this setting will be explained under the output section (10.5) and will be referred to as the exit flag.

The following quantities must be available in the indicated locations upon entry into this routine: (See Assign Table).

Location	Symbol	Contents
T	t - t _o	Time interval in minutes since epoch time, t
AO	a _o	Semi-major axis at t
QO	q_{o}	Perigee distance at to
EO	e _o	Eccentricity at t
XNO	n o	Mean angular motion at t

AXNO	$\begin{bmatrix} a_{\mathbf{x}}^{N} \\ 0 \end{bmatrix}$	Components in orbit plane at t_0 of $\underline{a} = e\underline{P}$
AYNO	a _y N _o	
XNODEO	ດ ່	Longitude of ascending node at t in radians
XLO	L _o	Mean longitude at to radians
С	c ¹¹	Drag coefficient
XM4CO3	(-4/3)c''	
COSI	$\cos i = W_z$	Cosine of the inclination
XKELSO	k L e so	
XNX+2	$N_z = 0$	
XMX+2	$M_z = \sin i$	
XKE	$k_e \approx 0.07436574$	a constant
XJGRCF	$k_e^{\sqrt{\mu} Ja_e^2} = 0.120717 \times 10$	-3, a constant

Index register two (2) must be set equal to 10, 20 or 30 upon entry.

The significance of this setting will be explained below under Output and will be referred to as the exit flag.

10.5 Output

1. (XR2) = 10, 20 or 30

If the exit flag is equal to 10, 20 or 30 the following quantities are available upon exit from this routine in the indicated locations:

Location	Contents	Location	Contents
A	a	ESQ	e ^{2.}
E	e .	XNODE	Ω (rad)
p	р	XNODOT	Ω (rad/min)
RTP	√p	RTA	√a
		XN	n

2. (XR2) = 30


If the exit flag is equal to 20 or 30 the following is also output:

Location	Contents	Location	Contents
OMGDT	$\dot{\omega}$ (rad/min)	RTESQ	$\sqrt{1 - e^2}$
ÒMGAS	$\omega_{_{\mathbf{S}}}$ (rad)	XL	L (rad)
AXN	$^{\mathrm{a}}_{\mathrm{xN}}$	U	U (mod 2π) (rad)
AYN	^a yN		

3. (XR2) = 30

If the exit flag is equal to 30 the following is also output:

Location	Contents	Location	Contents
SINO	$\sin \Omega = N_{y}$	UX	$\mathtt{U}_{\mathbf{x}}$
COSO	$\cos \Omega = N_{x}$	UY	u_y \underline{u}
WX	W	UZ	$\mathbf{U}_{\mathbf{z}}^{'}$
WY	Wy	vx	$\mathbf{v}_{\mathbf{x}}$
XMX	M _x	VY	v_y \underline{v}
XMY	M _v	VZ	$\mathbf{v}_{\mathbf{z}}^{'}$
DENM	$(1 + \sqrt{1 - e^2}) \sqrt[2]{1 - e^2}$	x	×]
COSEO	$\cos (E + \omega)$	Y	y
SINEO	$\sin (E + \omega)$	Z	z
ESINE	e sin E	RDOT	ř
ECOSE	e cos E	RVDOT	$\mathbf{r}\dot{\mathbf{v}}$
R	r	XDOT	×)
AR	a/r	YDOT	$\dot{y} \rightarrow \dot{\underline{r}}$
SINU	sin u	ZDOT	ż
COSU	cosu		

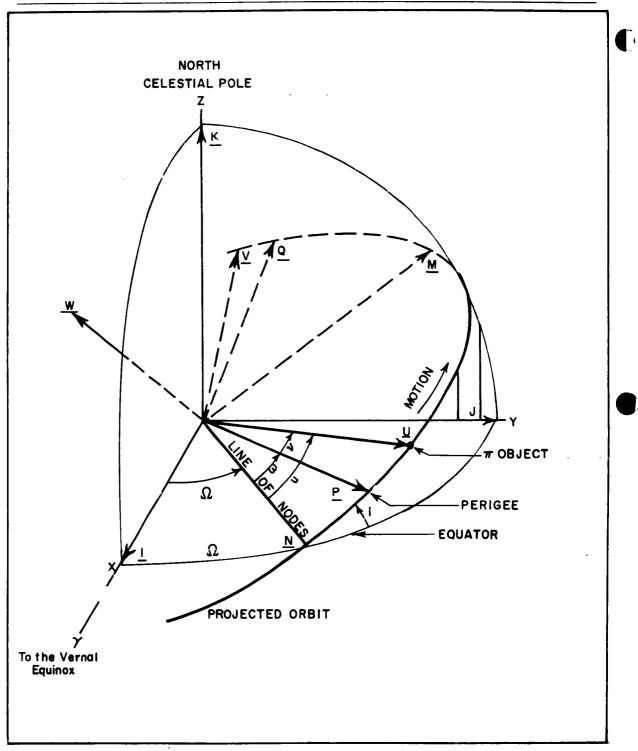

PROJECTION OF ORBIT ON CELESTIAL SPHERE, WITH ORIENTATION UNIT VECTORS AND ANGLES DISPLAYED

Fig. 10.1


Element Card Formats:

All programs accept a standard 7-card element set as input. The formats for these cards appear on the following pages. Those columns which are shaded are not used. In all floating point numbers, the decimal point may be placed anywhere in the field. Numbers requiring an exponent indicator such as c_a , d_a , and c_n , must be in one of the following formats:

- + . DDDDDDDDE + XX
- + . DDDDDDDDD $\Delta\Delta + X$
- + .DDDDDDDD + XXX

All programs except ASUM, SSUM, ISUM, PSR, and RESPLT will also accept a 6-card element set. Fields which differ from those of the 7-card element set are noted in the rightmost column of the card format description.

Element Card (1 of 7)

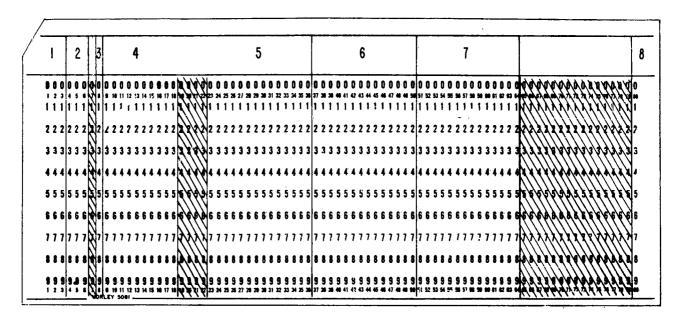

Field	Columns	7-Card Element Set	6-Card Element Set
1	1-3	Satellite Number, Right Justified	Same
2	4- 6	Element Set Number, Right Justified	Same
3	8	Card Number = 1	Same
4	9-18	Satellite Name, Alpha- numeric	Same, except in Col. 9-20
5	23-36	Epoch Revolution Number, (N _O), Right Justified	Same
6	37-50	Eccentricity, (e)	Same
7	51-64	Inclination, (i)	Same
8	80	Card Type = E	Blank

Element Card (2 of 7)

i		2	•		3		4	1																	5								1	6																	7																							
00	0 0	0 (0	Q	0	0	0	0	0	Ò	À	Ì,	K,	Ų	Ø,	٥/	N	Ņ	Ų0	0	0	0	0	0	0	0 1	0 1	0 (0 (0 (0 (10) (0	0	q	Þ	<u>√</u>	D)	V)	λį	N)	ľ	V	lo	0	0	0	0	0	0	0	0	0	0	0 (0 0	t	λÌ	l l	Į.	ĮΪ	۱۱	Q 1	1	0,	0	, O,	T.	O	0	4	4	0
1 2	3 4	• :	6	K	•	•	10	11	12	ŀ,	ĮÌ,	þ,	Á,	v)	w)	(À	À	/>	ψ	24	25	26	27 :	26 :	29 :	30 3	11 3	12 3	33 3	34 :	15 3	613	7 3	39	40	W	γλ	ŀλ	À	٤ì	٤)	γÀ	ę١	Y	51	52	53	54	55	56	57	54	19	60 (81 (12 (3 6	Ð	6)	ď	1,	4	4	ю/	ď	(3)	ίy	Λy	Ŵ	4,	₹,	Ã,	Ā	×
15	1 1	1 1	1	1	1	1	1	1	1	/	Ì	Į,	1	Ι,	1	1	V	/1	Į1	1	1	1	1	1	1	1 1	1 1	1	1	1	1 1	1	1	1	1		Ŋ	V	V)		'	1	X	V	1	1	1	1	1	1	1	1	1	1	1	1 1	1	1	<i>\</i>	1	/	/	/	1	1	1	1	Ŋ	Ŋ	þ	þ	þ		1
2 2 2	2/2	2 2	2	R	2	4	2	2	2	א	X)	7	8/	s/	ş	ş/	$\langle \rangle$	1/3]2	2	2	2	2	2	2	2 :	2 :	2 :	2	2 :	2 2	2 2	2	2	2	B	β	Ŋ,	<u>}</u>	/	ξ\	₹\\$	V	Y)	2	2	2	2	2	2	2	2	2	2	2 :	2 2	? 2	2	1	V	/	$\langle \cdot \rangle$	Į,	ý	Ý,	Ý,	þ	þ	à	ž	X	X	X	2
3 3 3	3 3	3 3	3	3	3	3	3	3	3	٤	å,	3/	3/	ş	ð,	'n			1/3	3	3	3	3	3	3	3 :	3 :	3 :	3 :	3 :	3 3	3 3	3	3	3	B	Ŋ	Y,	<u>,</u>	/	$\langle \cdot \rangle$	Ŋ	Ŋ	/3	3	. 3	3	3	3	3	3	3	3	3 :	3 :	3 3	3 3	ì	N	V	V			3	,	3	3	8	Z	Z	B	B	V	3
44	4 4	1 4	4	K	4	4	4	4	4	þ	Y	Y,	Y,	Y,	Y)	X)	/	/	4	4	4	4	4 -	4	4	4 4	4	4	4	4	1 4	1 4	4	4	4	Y	λ	Ŋ			1	Ŋ	/	/	4	4	4	4	4	4	4	4	4	4 -	4	4 4	14	þ	Ŋ		/	/	/		¥)	ď,	¥	¥	Y	Ý	Ý	Ŋ	V	
5 5 5	5 :	5 5	5	ş	5	5	5	5	5	ď	k,	Z	5	3	3	٤/		/	5	5	5	5	5	5	5	5 !	5 !	5	5	5	5 5	5 5	i 5	5	5	1	B)	k,			$\langle \rangle$		13	1	5	5	5	5	5	5	5	5	5	5 !	5 !	5 !	5 5	ì	/	/	Ι,			Ę)	5	é,	5	Ś	Ś	3	É	k/		5
661	6 6	6 6	6		6	6	6	6	6	Y,	S)	Ø,		6/	6/	6/	$\langle \langle \rangle \rangle$	$\langle \rangle$	6	6	6	6	6	6 1	6	6 1	6 1	6 1	6 (6 (6 E	6	6	6	6		g/	D	,	l,	/	/	/)	1	6	6	6	6	6	3	6	6	6	6	6 1	6 6	5 6	1	/		1	1		6\ 6\	6/	ď,	ď	à	d,	,	8	K	B	6
17:	1			D					1	\	Ν	//	ι)	1	Ι,	.\	\	Ι.	٧													1			1	١,	()	Ν	//	Ι,	Ι,	//	()	ι\	ł													k	Ι.	Ι,	ν,	\	\	/	\	\	/	.\	Λ	\	\	1	À	7
8 8 1				N					ſ	Ι.	Λ,	//	//	/,	.\	Ν	Ι.	Ι,	1													-			ł	1	//	Ν	/)	//	/	7	//	1)	1													ľ,	//	//	ι,	1	ι'	ν,	Ι.	Ι.	/	/	Λ.	Λ.	Λ.			
	٦,		9	K	۱		J	J	ή	7	7,	1	7	χ,	7	7	1	7,	ľ	۰	9	U	υ,		•		• •				, ,	ʹʹ		0	1	1	χ,	7	Ω,	Ί,	\	1	1	/°	ľ		0	9	đ	u		u			0 (, (, 0	ľ	//	/	/	\	\	\	^	^	٦	١,	١,	١,	١,	1	٧,	0
999	9 9	9 9	g	D	9	9	9	9	9	ď,	a)	ď	λ	Ŕ	ď,	١,	١)	'n	19	9	9	9	9	9	9	9 9	9 9	9 :	9 9	9 !	9 9	al g	9	9	9	ð	ď	7)	1	ľ	V	79	, b	1	9	9	9	9	q	9	9	9.	9	9	9 9	9 9	9	D	ı)	١,	1	'n	N	N	ď	þ	b	w)	ø,	Ą	ð	ð	6	9

Field	Columns	7-Card Element Set	6-Card Element Set
1	1 - 3	Satellite Number, Right Justified	Same
2	4-6	Element Set Number, Right Justified	Same
3	8	Card Number = 2	Same
4	9-12	Epoch Year	Same
5	23-36	Epoch Time, (T_0) , in Days of Year	Same
6	37-40	Not Used	Epoch Year of Decay
7	51-64	Mean Orbital Longitude, (L _o), in.Degrees	Epoch Time of Decay in Days of Year
8	80	Card Type = E	Blank

Element Card (2 of 7)

Element Card (3 of 7)

١		1).		3					4	ļ											5	,										(6										7																			
0.0	0	0 (1 0	4) (0	0	0 1	0 () 0	0	0	0	0 1	0 (0	0	0	0 () 0	0	0	0	0 1	0 () (0	0 () 0	0	0	0 0	0:0	0	0 0	0	0 (0	0	0 0) (8	0 (0 0	0	0 (0 0	0	6	/b	a	B	Ų)	Ţ	Ų	Á	þ	Ø	0	0,0	N C)
1 2	3	4 !		Ŋ	•	9 10	111	12	') i	14 1	5 16	17	18	15	20 2	21 2	2 23	24	25	26 2	7 24	21	30	31	32 :	33 3	43	5 30	37 1 1	6 3:	3 46 1	41 4	42 4 1 1	3 44	45	45 4	748 1	49 5	0 51 1 1 1	1 52 :	53 5 1 1	4 51	5 56 1	57 !	58 59 1 1	960 1	61 6	12 63 1 1	4	1	١,	٧,	1	ו פנ ער		1	//	//	1	1	γ,	1	o i
-11	1	וו	1	Ŋ	1	1)	,	1	I	J	1 1	ı	1	1	i	1 1	Ψ'	1	•	1 1	. ,	'	1	1	•	1	' '	•	ľ' '	' '	'	'	• •	•	'	, ,	,	' '	'['	'	' '	, ,	•	'	٠,	•	•	• •	1	Ι/	/	/,	//	Ι,	/	/1	1	Ί,	//	1	Ι,	Ί.	
2 2				K١	- 1																								l										ı											N١	١,	1	<i>\ \</i>	ι\	.\	Ι,	١)	<i>\</i>	Ν	Ι,	1/2	2)7	,
3 3				١,	ł												1																																	k١	1	١,	١,	`	Λ.	<i>'</i> '	١,	. \	``	ν,	<i>\</i>	3	3
4 4	4	4 4	1		4	4 4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4 4	4	4	4	4	4 4	4 4	1 4	4	4 4	1 4	4	4 4	1 4	4	4 4	1 4	4.4	4	4	4 4	4	4	4	4 4	4	4	4 4	4	1	//	/,	Y	Y)		()	X	X	X	Ŋ	V	À	,
5 5	5	5 !	5 5	é	5	5 5	5	5	5	5	5 5	5	5	5	5	5	5 5	5	5	5 :	5 5	5 5	5	5	5	5 !	5 5	5 5	5	5 5	5 5	5	5 5	5 5	5	5 5	5	5 !	5 5	5	5 5	5 5	5	5	5 5	5 5	5	5 5	5	1		1	þ	k)	6/	6/5	15	15	B	þ	<u></u>	9	5
6 6	6	6	6 6	é	6	6 (6	6	8	6	6 6	6	6	6	6	6	6 6	6	6	6	6 (6	6	6	6	6 1	6 (6 6	6	6 6	6 6	6	6 (6 6	Ğ	6 (6	6 (6 6	6	6 (6 6	i E	6	6 6	6	6	6 6	6	8		1	þ	ģ	þ	γ	Nè	6	B	à		B	6
11	7	7	7 7	Y	7	7 7	1	7	7	7	7 7	7	7	7	7	7	7	7	7	7	7 7	1 7	7	7	7	1	7 :	11	7	11	7	7	7	7 7	7	7 7	17	7	7 7	1 7	7 7	7 7	1	7	7 7	? 7	7	7 7	7	K)	1	/y	B	Ŋ	Y	$\langle \rangle$	1,	1	X	À,	1	1	7
8 8	8	8	8 8	1	8	8 (3 8	8	8	8	8 8	8	8	8	8	8	8	8	8	8	8 (3 8	8	8	8	8	8 1	8 8	8	8 8	8 8	8	8 8	8 8	8	8 1	8 8	8	8 8	8	8 8	8 8	8	8	8 8	8 8	8	8 8	8		N	1	Ŋ,	ø,		8/8	1	1	(g)	K,	6/		8

Field	Columns	7-Card Element Set	6-Card Element Set
1	1-3	Satellite Number, Right Justified	Same
2	4-6	Element Set Number, Right Justified	Same
3	8	Card Number = 3	Same
4	9-22	Anomalistic Period at Epoch, (P _a), in Days/ Rev.	Nodal Period at Epoch, (P _n)
5	23-36	Right Ascension of Ascending Node at T_0 , (Ω_0) , in Degrees	Same
6	37-50	Argument of Perigee at T_0 , (ω_0) , in Degrees	Same
7	51-64	Perigee Distance, (Q ₀) in Earth Radii	Same
8	80	Card Type = E	Blank

Element Card (3 of 7)

Element Card (4 of 7)

	ŀ			2	1		3					4												5											6											7																			į	Į
																													0 (0	0 (3 0	0	0 (0	0	0 (0	0	0	0 0) (0	0	0	0 0	0	0	0 (Q	V	N	N	Į)	Ó	Ā	X,	Q)	e d	8	K,	V	0	_
																													35 3 1 1			39 ·	10 4 1 1	1 42	1	44 11	5 46 1	47 1.	48 4 1 1	50 1	1	52 : 1	53 5 1 1	4 54 1	5 56 1	57	54 : 1	59 60 1 1	1	1	10 E	1	X	7	\backslash	Ŋ	Ŋ	Y	Å,	1	Įγ	V	1	7	1	
		•	ľ	•	Ì	N	1																							1																						Ν	. \	Ι,	1)	1	Ί.	7	7	7	"	//	/	V	•	
•	2 2	2	2	2	2	N	2 /	2	2	?	2 2	! 2	2	2	2	2 2	? 2	2	2 2	2	2	2	2 :	2 2	2 2	2	2	2	2 2	2 2	2	2	2 2	2 2	2	2 2	2	Z	2 2	2	2	2	2 2	. 2	. 2	2	Z .	2 2	2	Z	2 2	X	۲,	\	$\langle . \rangle$	\ x	X	X	K,	Κ,	(X	Χ	V	7	
	3 3	3	3	3	3	₹.	3 3	3	3	3	3 3	3	3	3	3	3 3	3	3	3 3	3	3	3	3	3 3	3 3	3	3	3	3 :	3 3	3	3	3 3	3 3	3	3 3	3	3	3 3	3	3	3	3 3	3	3	3	3	3 3	3	3	3 :	3 3	/3	3	3/	N	B	B	Ý	3	3/3	4/3	r/	1	3	
	1 4	4	4	4	4	Ŋ	۱,	1 4	4	4	4 4	1 4	4	4	4	4 1	1 4	4	4 4	1 4	4	4	4 .	4 4	1 4	4	4	4	4 4	1 4	4	4	4 4	1 4	4	4 4	4	4	4 4	4	4	4	4 4	1 4	1 4	4	4	4 4	4	4	4 4	ŀ	X	X)	Ò	Ŋ	Ŋ	1	Y	X)	1	Ŋ	X	V		
			_	=		Ŋ			5	5	K 4			E	5	5 (5 1	: 5	5	5	5	5 1	5 5	. 5	5	5	5 :	١,	5	5	5 1	5 5	5	5 5	5	5	5 5	i 5	5	5	5 5	; ;	5 5	5	5.	5 5	5	5	5 !	١,	6	Ά,	$\langle \rangle$	√ 5\≀	\ *	1	1	٤,	//	/	3	6	5	,
			İ		i	V													ļ											1																						ľ.	١)	ι\	.\	.\	\	\	/	7	7)	$^{\prime\prime}$	/		Ĺ	
1	6 6	6	6	6	6	N	6	6	6	6	6 (6	6	6	6	6 (6 6	6	6 (3 6	6	6	6	6 (6 6	6	6	6	6 (6 6	6	6	6 (5 6	6	6 1	6	6	6 (5	6	6	6 6	5 6	5 E	6	Б	5 E	i 6	6	6 (5 /8	/6	þ	6 /	1/0	/9	1	4	6,	64	1	1	1	٥	
	7	7	7	7	7	Ŋ	7	! 7	7	7	7 7	1 7	1	7	7	7 7	17	7	7 ;	1 7	7	7	7	7	7	7	7	7	7	7 7	7	7	7 7	1 7	7	7 7	7	7	7 7	7	7	7	7 7	1 7	1	7	7	7 7	7	7	7 7	þ	/X	X,	Z)	r)	t)	t,	X,	ί,	Ŋ	$\langle \rangle$	Þ	1	7	
		. 8	я	8	8	N		3 2	8	8	R 1		ı A	8	8	8 /	8 8	8 8	8	1 8	8	8	2	8 !	8 8	. 8	8	. 8	.8 (8 8	8	8	8 1	9 8	8	8 (8	8	8 1	8 8	8	8	8 8	3 8	3 8	8	8	8 8	8	8	8 1	3 N	1	8/	$\langle \cdot \rangle$	1/8	V	V	A)	8/	4	/	18	X	8	;
			ľ	-	,	1]		•	•				•	•	- '			1											1											ı					•						ĺ.	$^{\prime\prime}$	1		7)	7)	7	7	7		//	/	7		
	9 9	9	9	9	9	Ŋ	9	3 9	9	9	9 !	9 S	9 5 10	9	5	9 !	9 5	9	9 2	4 2	9	27	9 20:	9 :	9 5	1 32	9	9	9 ! 35 3	9 3	. y . 38	39	5 ; 40 4	9 9	1 Y 2 43	y :	1 Y	47	y :	, 3 1 54	3	5 52	y : 50 5	4 5	5 3 5 54	57	3 56 :	3 3 50 8) 3 61	1	3 ; 63 (1	Z	12	3	١,	γ,	7	Z,	٤,	ζ,	ζ,	ζ,	ζ,	J	,

Field	Columns	7-Card Element Set	6-Card Element Set
1	1-3	Satellite Number, Right Justified	Same
2	4-6	Element Set Number, Right Justified	Same
3	8	Card Number = 4	Same
4	9-22	Rate of Change of P_a , (c_a) , in Days/(Rev.) ² , $+$. DDDDDDDDE-XX	Rate of Change of P _n , (c _n), + D. DDDDDDDE-XX
5	23-36	First Derivative with Respect to Time of Right Ascension of Ascending Node, (Ω_0), in Deg/ Day	Same
6	37-50	First Derivative with Respect to Time of the Argument of Perigee, (ω_0) , in Deg/ Day	Same
7	51-64	Not Used	First Derivative with Respect to Time of Perigee Distance (\dot{Q}_0) , \pm D. DDDDDDDE-XX
8	80	Card Type = E	Blank

Element Card (4 of 7)

Element Card (5 of 7)

0 9		_		1	- 1					•											J						İ					(ò										ſ					į														
	יוט	0 0	0	Q	0 1	0	0	0 (0	0	0 (0	0	0 (0	0	0 () (0	0	0	0 (0 (0 0	0	0	0	0 (0 0	0	0	0						- 1			0 (0 0	0	0 (0 0	0 (0 0	0	9	þ/g	V	V	ý,	Уý	Ý	Þ	Ø.	۹۱	Ŋ	18	O)
1 4	3	4 5	6	N	•	10	11	12 '	3 14	15	16 1	7 10	19 :	29 2	1 22	23	14 2	5 2	6 2	20	29	30 3	31 3	12 33	3 34	35	36	37 3	M 3	9 40	41	42				.,	8 49	-7			54 5	6 56	57	58 5	50 60	61 6	2 6	1 64	64	1	Ψ	4	ζø/,	Ŋ	13	₹	Λ,	χ,	γ)	4	ľ	0
11	1	1 1	1		ון ו	1	1	()	1	1	1 1	1	1	1 1	1	1	1 1	1 1	1	1	1	1 1	1 1	}	1	1	1	1 1	1 1	1	1	1	1 1	lí	1	1	1	1	1 1	1	1 1	1 1	1	1	1 1	ì	1 1	1	1	1	/,	1	1	/	/,	/	1			/	ľ	ļ
2 2	2	2 2	2	8	2	2	2	2 2	? 2	2	2 2	2	2	2 :	2 2	2	2 :	2 2	2 2	2	2	2 :	2 :	2 2	2	2	2	2 :	2 2	2	2	2	2 2	2 2	2	2 :	2 2	2	2 2	2	2 :	2 2	2	2	2 2	2	2 2	? 2	Ý,	X 2	1	Z,	X,	7	/2	B	1	K)	8/	1/8	1	,
3 3	3	3 3	3	3	3	3, 3	3	3 :	3	3	3 3	3	3	3 :	3 3	3	3 :	3 :	3 3	3	3	3	3	3 3	3	3	3	3 :	3 3	3	3	3	3 :	3 3	3	3 :	3	3	3 3	3	3	3 3	3	3	3 3	3	3 3	3		1/2	1	\d	B)	3 /	V	13	3	3/	3/	Ŋ	1	3
4 4	4	4 4	4		4	F 4	4	4 4	1 4	4	4 4	1 4	4	4	1 4	4	4	4	4 4	4	4	4	4	4 4	4	4	4	4	4 4	۱ 4	4	4	4 4	1 4	4	4	ļ 4	4	4 4	4	4	4 4	4	4	4 4	4	4 4	l 4	1	V	V	þ	Ý,	λ	N	1	Ŋ,	Y	*	1	1	•
5 5	5	5 5	5	3	5	5 5	5	5 :	i 5	5	5 !	5	5	5	5 5	5	5 :	5 !	5 5	5	5	5 :	5 :	5 5	5 5	5	5	5	5 5	5 5	5	5	5 :	5 5	5	5 :	5 5	5	5 5	5	5 :	5 5	5	5	5 5	5	5 5	5 5	Ø,	<i>\</i>	B	Ŋ	,		1/2	1	الجرا	Z	7	/	ŀ	5
6 6	6	6 6	6	6	6	5 6	6	5 (6 6	6	6 (6	6	6	6 6	6	6 1	6 (6 6	6	6	6	6 1	6 8	6	6	8	6 (6 6	6	6	6	6 (6 6	6	6 1	6 6	6	6 6	6	6 (6 6	6	6 1	6 6	6	6 6	6	D	1	//	\ \	B		/	1	6	É,	6/	//	Į,	6
17	7	7 7	7		7	17	7	7	17	7	7 7	17	7	7	, ,	7	7	7	7 7	17	7	7	7	7 7	17	7	7	7	7 7	7	7	7	7 :	17	7	7	17	7	7 7	17	7	, ,	7	7	? 7	7	7 7	17	1			Y	Å,	b /	//	4	Ŋ	Y	$\langle k \rangle$	\langle	ŀ	7
8 8		8 1	. 8												• •							٠		•								۰												3			• •		7	//	1	7	7	7	//	//	7	1	7)	//	١,	£

Field	Columns	7-Card Element Set	6-Card Element Set
1	1-3	Satellite Number, Right Justified	Same
2	4-6	Element Set Number, Right Justified	Same
3	8	Card Number = 5	Same
4	9-22	Rate of Change of c _a , (d _a), in Days/(Rev) ³ , <u>+</u> D. DDDDDDDDE-XX	Second Derivative with Respect to Time of the Rate of Change of P_n , \dot{c}_n , $+$ D. DDDDDDDE-XX
5	23-36	Not Used	One-Half of Second Derivative with Respect to Time of RA, (1/2 RA,), + D. DDDDDDDE-XX
6	37-50	Not Used	One-Half of Second Derivative with Respect to Time of ω , $(1/2 \dot{\omega}_0)$, $\pm D$. DDDDDDDE - XX
7	51-64	Not Used	One-Half of Second Derivative with Respect to Time of Q_0 , $(1/2 \ \dot{Q}_0)$, \pm D. DDDDDDDE-XX
8	80	Card Type = E	Blank

Element Card (5 of 7)

Element Card (6 of 7)

0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	1		2		ļ	3					4	ļ											5	,										6					1					7																		
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	0 0 0	0	0	0	1	0 () (0	0	0 1	0 0	0	0	0	0 (0 0	0	0	0 0	0	0	0	0 (0 0	0	0	0 1	0 0	0	0 (0 0	0	0	0 0	0	0 (0 0	0	0 0	0	0 (0 0	0	0 (0 0	0	0 0	0	0	Ņ	VQ.	, a	0/	0/0	\0	1	₩.	N	N	Ą	6	0
22222222222222222222222222222222222222																																									53 5	4 5	5 54	57 5	56 54	60	61 E	2 63	ч	'n,	r de	4	þ	M)	¢γ	ĺχ	À	'n	43	Ŋ	ķ	×
3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3		Γ	•	•	V	1			•	•			•	•			- 1																						1										ſ	//	//	Λ,	//	$^{\prime}$	Ν	Λ,	1	1	1	/	1	1
555555555555555555555555555555555555555	2 2 2	2	2	2	3	2	12	2	?	2	2 2	2	2	2	2 :	2 2	2	2	2 2	2	2	2	2 2	2 2	2	2	2 :	2 2	2	2	2 2	2	2	2 2	2	2 :	2 2	2	2 2	2	2 2	2 2	2	2 :	2 2	2	2 2	2	2	1/8	B	1	/ 8/	? \	18	18,	8	8/	1/8	B	B	2
555555555555555555555555555555555555555	3 3 3	3	3	3	Ś	3	3 3	3	3	3	3 3	3	3	3	3 :	3 3	3	3	3 3	3	3	3	3 :	3 3	3	3	3	3 3	3	3	3 3	3	3	3 3	3	3	3 3	3	3 3	3	3 3	3 3	3	3 :	3 3	3	3 3	3	3	Ŋ	Ŋ	13/	3/	Ý,	Ŋ	13	3	3/	Ŋ	Ŋ	J.	3
	4 4 4	4	4	4	À	4	4	4	4	4	4 4	4	4	4	4	1 4	4	4	4 4	4	4	4	4 4	4 4	4	4	4	4 4	4	4	4 4	4	4	4 4	4	4	1 4	4	4	4	4 4	1 4	4	4	4 4	4	4 4	4	4	Y,	1	1	Y.	1	/	1	X	Y)	1	/	þ	•
= e e e e e e e e e e e e e e e e e e e	5 5 5	5	5	5	3	5	5 5	5	5	5	5 5	5	5	5	5	5 5	5	5	5 5	5	5	5	5 :	5 5	5	5	5	5 5	5	5	5 5	5	5	5 5	5	5 !	5 5	5	5 5	5	5 5	5. 5	5	5	5 5	5	5 5	5	5	1	5	12	Z)	1	/	1	'é)	6/1	5/F	16	Þ	5
	6 6 6	6	6	6	þ	8	6 (6	6	6	6 6	6	6	6	6 (6 6	6	6	6 6	6	6	6	6 (6 6	6	6	6	6 6	6	6	6 6	6	6	6- 6	6	6 !	6	6	6 6	6	6 (6 6	6	6 !	6 6	6	6 6	6	6	6/	16	b	þ	Ŋ	V	<i>\</i> \&\	E)	þ	N	16	þ	6
אאאאאאוווויייוווייוווווווווווווווווווו	777	7	7	7		7	7 7	7	7	7	7 7	17	7	7	7	7 7	1	7	7 7	7	1	7	7 :	7 7	7	7	7	7 7	7	7	7 7	7	7	7 7	7	7	1	7	7 7	7	7 7	1	1	7	7 ?	7	7 7	7	7	$\langle \rangle$	Ŋ	14	Y,	Y,	$\langle \rangle$	1	4	Y)	Ŋ	1	/	7
3 5 5 8 5 8 5 8 5 8 5 8 5 8 5 8 5 8 5 8	8 8 8	8	8	8	8	8	8 1	8	8	8	8 8	8	8	8	8	8 8	8 8	8	8 8	8	8	8	8	8 8	8	8	8	8 8	8	8	8 8	8	8	8 8	8	8	8 8	8	8 8	8	8 8	8 8	8 8	8	8 8	8	8 8	8	8		18	B	X	*	1	18	JR,	K)	4)	18	B	ŀ

Field	Columns	7-Card Element Set	6-Card Element Set
1	1 - 3	Satellite Number, Right Justified	Same
2	4-6	Element Set Number, Right Justified	Same
3	8	Card Number = 6	Same
4	9-22	Semi-Major Axis, (a), in Earth Radii	Limit of ΔT_n
5	23-36	Nodal Period at Epoch, (P _n), in Days/Rev.	Limit of $\triangle RA_n$ in Columns 23-32 Limit of $\triangle H$ in Columns 33-36
6	37-50	Rate of Change of P_n , (c_n) in Days /(Rev.) ² $+$. DDDDDDDDE-XX	Standard Brightness
7	51-64	Not Used	Phase Angle Coefficient
8 .	80	Card Type = E	Blank

Element Card (6 of 7)

Element Card (7 of 7)

ļ	ı			2			3																4	}						5								6									•	7						8)			9													i
1	0 0	0	0	0	0		10	6,	ď,	Ó,	ď,	(į	ĮΪ	Ī	Ī	٦,	١,	``	٠.	_		0	0	0	0	0 (0 (0 () (0	0	0	0	0 (0 0	0	0	0	0 () (0	0	0	0	0 1	0 (0	0 (0	0	0 (Ó	0	0	0 (0 (0	Q	Ý	ē	9	9	٩	94	Ŋ	2/0	7	Ý	ļ)
1	1 1	1	1	1	1		j	ĺ,	1	Y,	/ ₁ / ₁₂ /	/		13	\langle	V	V	V	Y	/	20 : 1	1 1	5 24	1	1	1	30 3 1 1	1 1	1 1	1	1	1	1	1	1 1	1	1	1	1	1 1	1	1	1	1	1	1	1 1	1 1	1	1	1	1 1	1	1	1	1	1 1	1	1	1	X	1	1	1	/		Ñ			į	!
	2 2	2	2	2	2		þ	X	X	X	'n	1					1	1/3	/	/x	2	2 2	2. 2	2	2	2	2 :	2 2	2 2	2 2	2	2	2	2	2 :	2 2	2	2	2	2 2	2 2	2	2	2	2	2	2 2	2 2	2 2	2	2	2 2	2 2	2	?	2 :	2 2	2 2	1	ķ	'n	¥)	'n,	8	Ż	Ý,	λ	1	/	1	,
	3 3	3	3	3	3		3	8	à	3)	à	3/	3/	3/	1	1	/	/3	1	8	3	3 :	3 3	3	3	3	3 :	3 :	3 :	3 3	3	3	3	3	3	3 3	3	3	3	3 3	3 3	3	3	3	3	3	3 3	3 3	3 3	3	3	3 :	3 3	3	3	3	3 3	3 3	3	k)	À	Ż,	1	ş	Ŋ	'n,	4/5	?	3/8	Ì	3
•	4 4	4	4	4	4	ŀ	4	6	Ý	Ý	Ý	Ý,	Y	Ŋ.	V,	Y	Ņ	N	Ŋ	Y	4	4 4	1 4	1 4	4	4	4	4	4 4	4	1 4	4	4	4	4	4 4	4	4	4	4 4	1 4	4	4	4	4	4	4 4	4 4	1 4	4	4	4 4	1 4	4	4	4	4 4	1	8	1	X	X,	,	Ŋ	À	1	1	$\langle \cdot \rangle$	N	ď	,
			ì			ľ	VI.	K.	Ι,	ι,	ν,	ι,	' /	ι\	ι\	ι,	١,	ι\	. \	\	1						ļ						ľ											ı								5 :						ì	1	()	ľ	Ι,	١)	()	.\	Λ.	//	()	ι\	1	
			Т			ľ	4	I١	ι\	١,	Ι,	.\	\	\	\	\	1	Ι.	Ι,	Ι,	ĺ						i						1																			6 (1	N	ι\	Ν.	Ι,	1	()	Λ		6/		1	Ì	ĝ
			1			h	ľ	Ν	\	\	\	\	Λ.	Ι.	ν.	Ν.	ν,	<i>\ \</i>	١)	١,	l						ı						1											j								? :						1	٨	\	1	ν,	١,	`\	.\	Z,	1	1	/		1
	8 (8	8	1	1	1	1	8	B) Y) Y	8	X)	8	,	1	1	1	1)	1	8	8	8 1	8 8	8	8	8	8	8	8 1	8 8	8	8	8	8	8 (8 8	8	8	8 1	8 8	8 8	8	8	8	8	8 1	8 8	8 8	8	8	8 1	8	8	8	8	8 1	8 8	1	18	B	þ	Þ	A	4	8	9	()	1	۱	8
	9 9	9 9	9	9	9		Ų9	ķ	A,	Ŋ	ã,	ď,	ş	9	9	9	6/	Ŋ	Ņ	/4	9	9	9 !	9 9	9	9	9	9	9	9 !	9 9	9	9	9	9	9 9	9 9	9	9	9 9	9 9	9	9	9	9	9	9 !	9 5	9 9	9	9	9	9 9	9	9	9	9 !	9 9	k	/3	13	Ş	ş	Ş	3	3	3/	义	Ŋ	1	9

Field	Columns	7-Card Element Set
1	1-3	Satellite Number, Right Justified
2	4-6	Element Set Number, Right Justified
3	8	Card Number = 7
4	23-29	Initial Revolution Number, (N;), Right Justified
5	30-36	Final Revolution Number, (N _f), Right Justified
6	37-50	Bulletin Expiration Time in YMMDDHHMMSS. SS, Decimal Point in Column 48
7	51-58	Root Mean Square of Error, in Kilometers, (RMS)
8	59-66	Number of Observations Used to Determine RMS
9	67	i-Stop { Blank = Correct i i = Do not correct i
10	80	Card Type = E

Element Card (7 of 7)

Station or Sensor Card

1		±ι	0 (2	D	0 :	± o	ō I	3 0 D	D	D D	D	D-1	4 0 0	D	5		6	;		7		1	3						9						l	0	ır	12					13	1								1	2	ļ
0 0 0						7				_		1				Т	Т	0	0 (00	0	0 0	0	0	0 0	0	0 0	0	0 0	0 (0 (0 () (0	0 0	0 0) 0	0	0-0	0	0 0	0	0 (0 0	0	0 0	0	0 (7	7	7	Z	7	10	
1.23	4	5 (7		10	11	2 !3	14 1	5 16	17	18 19	20	21 2	2 23	24	25 21	2/	28	29 3	931	32	33 34	35	35	7 36	39 4	10 41	42	43 44	45 4	6 47	44 (4 50	51 5	52 53	54 5	5 56	57	54 5	60	61 G	2 83	64 6	5 44	67 (N W	70	71 7	Ŋ	(K)	1	V	Ŋ,	4.	10
111	1	1 1	1	1 1	1	1	1 1	1 1	1	1	1 1	1	1 1	1	1	1 1	1	1	1 1	1	1	1 1	1	1	1 1	1	1)	1	1 1	1 1	1	1	1	1	1 1	1 1	1	1	1 1	1	1 1	1	1 1	1 1	1	1 1	1	1 1	Ŋ	W.	1/3	A	1	1	1
2 2 2	2	2 2	2	2 .	2	2	? 2	2 2	2	2	2 2	2	2 2	2 2	2	2 2	2	2	2 2	2	2	2 2	2	2	2 3	2 :	2 2	2	2 2	2 2	2 2	2 :	2 2	2 :	2 2	2 2	2	2	2 2	2	2 2	2	2 2	2 2	2	2 2	2	2 2	2/2	1	/	V	\	2 2	7
3 3 3	3	3 3	3	3 :	3	3	3 3	3 :	3	3	3 3	3	3 :	3 3	3	3 3	3	3	3 :	3	3	3 3	3	3	3 3	3	3 3	3	3 3	3 :	3	3 :	3	3	3 3	3 3	3 3	3	3 3	3	3 3	3	3 3	3 3	3	3 3	3	3 3	3 2	18	V	V) 3	3 3	3
4 4 4	4	4 4	4	4	4	4	4 4	4 4	4	4	4 4	4	4 4	1 4	4	4 4	4	4	4 4	4	4	4 4	4	4	4 4	4	4 4	4	4 4	4	4	4 4	1 4	4	4 4	4 4	4	4	4 4	4	4:4	4	4 4	4 4	4	4 4	4	4:4	1	W	N	V	4	1	•
5 5 5	5	5 5	5	5 !	5	5	5 5	5 !	5 5	5	5 5	5	5 :	5 5	5	5 5	5	5	5 :	5	5	5 5	5	5	5 5	5	5 5	5.	5 5	5 :	i 5	5 !	5 5	5 :	5 5	5 5	5 5	5	5 5	5	5 5	i 5	5 :	5 5	5	5 5	5	5 5	Ş			1)) 5	5	5
666	6	6 E	6	6 (6	6	6 6	6 (6	6	6 6	6	6 (6	6	6 6	6	6	6 (6	6	6 6	6	6	6 6	6	6 6	6	6 6	6 (6	6 (6	6 (6-6	6 6	3	6	6 6	6	6 8	6	6 (6 6	6	6 6	6	6 (6		1/6	1	6	6	6
1 7 7	7	7 7	7	7 7	7	7	7 7	7	7	7	7 7	7	7 7	1 7	7	7 7	7	7	7 7	,	7	7 7	7	1	1 7	7	7 7	7	7 7	7 7	7	7 7	7	7	7 7	7 7	, ,	7	7 7	7	7 7	7	7 7	1 7	7	7 7	7	7 7		1	//	(y)	y,	, 7	7
888	8	ê 8	8	8 8	8 8	8	8 8	8 8	8 8	8	8 8	8	8 (8 8	8	8 8	8	8	8 8	8	8	8 8	8	8	8 8	8	8 8	8	8 8	8 (8 8	8 1	8 8	8 1	8 8	8 8	8	8	8 8	8	8 8	8	8 8	8 8	8	8 8	8	8 8	1	1	1	(A)		8	8

Field No.	Columns	Description
1	1 - 4	Sensor Number
2 .	5 – 11	ϕ^{O} (+ N) - Latitude(Assumed Decimal Between Cols. 7-8)
3	12-19	$\lambda^{\circ} \left(\begin{array}{c} + W \\ - E \end{array} \right)$ - Longitude (Assumed Decimal Between Cols. 15-16)
4	20-25	H (meters) - Altitude (Assumed Decimal After Col. 25)
5	26	Classification
6	27 - 30	Sensor Type
7	31 - 34	Previous Sensor Number
8	35 - 36	Number Within Sensor Complex
9	37-54	Name
10	55-56	Equipment type
11	57	Continent
12	58-59	Country or State
13	60-72	Comments
14	79	Look Angle Coordinate Indicator
15	80	Card Type (code type = S Punch 0, 2)

Station or Sensor Card

11 12 13 14 15 16 17	STATION C DATE NUMBER C DATE NUMBER C C C C C C C C C C C C C C C C C C C		this observation is classified. O or 0 voerpunches are not allowed.			n Card)	•		mn 3]	Azimuth or right ascension, with possible + or - minus overpunch in column 31. Minus overpunch means fields 7 and 8 are declination and right ascension.		ivency shift in cycles per second; depending on punch in column 54.	unch means field 10 is maximum frequency shift.	Probeins a ministerningh then columns	55-57 contain the rador cross section in meters	59-63 contain the frequency, with decimal point between 60 and 61.							the Association Status as determined in Report Association.
	(\$) ELEVATION AZIMUTH D. D. D. D. D. D. D. D. D. D. D. D. D. D		Satellite number, column 1 contains a minus overpunch if this observation is classified. O or 0 overpunches are not allowed.			rt 2 of Observation Card)			g on punch in column 31	ssible + or - minus overpunch in column 31. Minus overpunch means fields		Range rate, in kilometers per second; or maximum frequency shift in cycles per second; depending on punch in column 54.	Zero punch or space means range rate in field 10; 1 punch means field 10 is maximum frequency shift.	When column 58 contains a minus aunch Hen columns	55-57 contain the rador cross section in meters	59-63 contain the frequency, with decimal point betwe				Çard)	ORCON	met.	Card type. O means unknown; 1-9 coded according to the Association Status as determined in Report Association.
	DATE TIME (2) (3) (4) (2) (4) (4) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (6) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1		stellite number, column 1 contains	Equipment type	Station number	Accuracy of signal strength (See Part 2 of Observation Card)	ıte	Time (Z)	Elevation or declination, depending on punch in column 31	limuth or right ascension, with pos	Slont range, in kilometers	nge rate, in kilometers per second	iro punch or space means range rat	Brightness at observation time	Maximum brightness	Minimum brightness	Time interval	Date or line number	Message number	Equinox (See Part 3 of Observation Card)	Observation number, as assigned by ORCON	Switch indicator used by manual system	and type. 0 means unknown; 1-9 c
**************************************	STATION C DATE Y 88 N C 0 1 12 G 1	COLUMNS	1-3	4-5 Eq.	6-9 Sta	10	11-15 Date	16-24 Tin	25-30 EH	31-37 Az	38-44 Slo	45-53 Ran	54 Zei	55-57 Bri	58-59 Ma	60-61 Mi	62-63	64-65 Da	9-99 We	70 Eq	73-78 Ob	.¥S 6∠	3 8
FIELD 2	w o	FIELD	-	2	ო	4	ĸ	9	7	80	٥	2	Ξ	120	. 13.	. 12c	PZ1	13	7	. 51	91	21	. 81

Observation Card (Part 1 of 3)

COLUMN 10 (ACCURACY)

Either accuracy or signal strength may be indicated in column 10, coded according to the following:

If Type, in columns 4 and 5, is 31 or greater, column 10 contains signal strength. If Type is 30 or less, column 10 contains accuracy.

Code Figure	Accuracy	Signal
. 0	Normal observations made under fair conditions.	Signal strength good, reliable measurement.
1	Observations slightly under par due to outside interference (e.g. some clouds, reduced visibility).	Signal fair.
2	Observations only poor due to outside interference.	Signal weak, results poor.
3	Only estimates possible (malfunction of instrument, observation time span too short).	Signal questionable.
4	Doubtful observation, unable to verify either object or instrument behavior. Observations should be considered only as tentative.	

COLUMNS 55 - 63 (CROSS SECTION-FREQUENCY/ MAGNITUDE)

The block containing columns 55 through 63 is a dual purpose block where cross section and frequency, or magnitude and time interval are indicated. In order to specify cross section and frequency, a minus is used in column 58. No sign is used in column 58 when this block contains magnitude and time interval.

- A. Cross section, given in square meters, is listed in columns 55 through 57. To indicate less than one square meter cross section, use appropriate numbers and a minus in column 55 thus in effect putting a decimal point before column 55. For larger values where three digits would not be sufficient, use a plus in column 55 to represent ten times the indicated value (adding a zero to the value listed).
- B. Frequency in megacycles, is listed in columns 58 through 63 with the decimal point understood to be located between columns 60 and 61. In rare cases it might be desirable to increase the range of frequency given either side of the decimal point. To do this, use a minus in column 63 to move the point one place to the left, or a plus in column 63 to move the point one place to the right.

Observation Card (Part 2 of 3)

COLUMN 70 (EQUINOX)

Column 70 contains year of Equinox as specified by the following:

0 = year of date

1 = 1900

2 = 1920

3 = 1950

4 = 1975

5 = 2000

6 = 1850

7 = 1855

8 = 1875

9 = 1960

	t				2																											;	3																														
0 0 0	0	0 (9	0	0	B, I	Ŋ	7	ð	Ý	Ą	ģ	7	ð	Ó	B	И	1	6	o,	Ī	ď	ν	Ţ	Ó	ø	À	2	70	D	ď,	Ψ,	Q	9/1	yc	ď	0/	ęγ	Ó	Ā	1	Ŋ	6	0	Q	Ø.	ý	ď	o/o	ď	y0,	10	0	Q	ď	Ŋ	ď	10	9	ð,	70	Q Ì	ī
1 2 3		5 1				١.	١.	١.	١,		١.	١.	١.	٠,		١.	١.	١.	١.	,		١.	١.	١.	١.		١.	١.	١.	•	١.	. 1		١.	١.	1	١,	٠,			١.	١.	Α.	٠,		τ.	`	τ.	Α.	١.	١.		٠,٧	•	١.	72	١.	١.	١.	١,			١.
111	1	1 1	1	1	1	V	' Y	۱,	V.	Y	V	Į٧	(1	ſ	1	ľ	1	()	₍₁₎	y	Ĭ	1\	۲)	(t	Ų	Y	1	1	1	∖ 1	1	1	V	Ŋ	1	v	1	1	V	X	V	1	()	ĺΙ,	1	V	1	N	ľ	√Λ	(1)	(ſ	Á,	1	Vı	X	<u>'1</u> /	1 A	ĺħ	/ 1,	1	N	1
	•			,		λ.	,	. \	۱,	٧,	1	,	Ι.	`	ر در	ν,	λ.	.\	\	ر ا	7	/	$\langle \cdot \rangle$. \	۱,	۴,	/	╮	.\	۲,	ر د	√,	7	$^{\prime}$.\	1	١,	` \	۱ ،	Λ,	7,	╲	.\		ر م	λ,	/	7	./.	7	λ	۲.	\ <u>^</u>	7;	γ,	1.	7		. \	′,	٦)	λ,	/
2 2 2	2	2 4		-	4	۲\	ί,	٧	¥	٦	Λ	۲,	١,	٧	ķ	٩	۷) ۱	٧	٧	*	^	۲)	1	ľ	¥	۱,	$^{\wedge}$	ζ,	٧,	ľ	¥	٩	۷,	ξ,	ľ	4	¥	4	¥	۹	۷٧	(¥	(Z	X	٦	44	. 4	۷١	₹,	\Z	Κ,	/z	X	4	ζÝ	্ধ	ζ)	4	/X	¥	¥.	Υ	΄.
3 3 3	3	3 :	1 3	3	3	3	,	73	/3	1	ž	3	1	3	8	k	3/	1	۱3	3	ķ	3/	2	13	1	à	3/	3	3	/з	B	ď	3/	3)	ı)	3	Z,	3	/3	ž	3/	3 }	, }	3	\	3/3	Į,	3/	3)	3	(ه	13	13	3	3∕3	1	3/	ز ي	Y3	٦,	1	λ.	3
					l	\backslash	\	.\	, `	\ [']	\	/	/	1	΄,	ν,	\	\	\	. `	\	\	\	١,	ν,	\	/	/	\	١,	√,	ν,	\	/	\	\	١,	, \	΄,	\	\	/	\	\setminus	١,	ν,	\		/	/		/	$\langle \ \rangle$	ι'	Ι,	/	/	/	\	΄,	′ ′	\	1
444	4	4	4	4	4	Ź.	V	V	¥	À	(4)	4)	ķ	¥	¥	V	ŧ,	(1	V	¥	1	()	1	Ņ	À	À	4 /	(پ	4	V	¥	Þ	4)	(ì	1	¥	¥	Ņ	¥	À	(4)	ų Ì	N4	¥,	À.	4	Ì	(4)	ŧ,	\ 4	X À	14	¥	À.	4 4	(À	ø,	Æ)	1/4	¥	λ	Ņ	ł
	_				_	7,	7	Γ,	ľ	/	7	_\	' '	١,	/	/	\	/	/	Ľ,	7	7	١,	Ι,	/	7	_/		' '	Ι.	/	7	.\		' '	۲,	7	/	/	7	/	_ \	' /	Γ,	΄,	7		7	.\	.]	7	′ /	Γ,	7	7	7	/		7	Ĺ		\	١,
5 5 5	5	5 :	5	5	5	57	1	(5	,5	√5	5	٤!	1/2	1	۶,	5	(5 5	Ş	5	5	۶:	۶/:	5 6	5	₍ 5)	Ę	5 \!	5\ {	į¥	۶,	₍₂)	٤	١,	įγ	7	5/	5 %	5	\ ⁵ `	5 :	\ 5	₹	7	5\	5 Y	e j	5 ?	5 5	\\$	٦,	i\5	5	5\	5 5	į 5	ş	5	ĵ\\$	5	5١,	Ę!	λ
8 6 6	2	2 1			اء	$\langle \cdot \rangle$.\	ί,	()	ر ٍ	۴,	١,	Ι.	\	7	,	. \	' '	Λ,	1	7	۱ء	λ,	.\.	/	۱,	ر م	λ,	λ,	\	7	ري,	,	λ,		/	,	Ι,	,)	ر ٍ ر	(ی		٠,	7	λ	۱.	ζ.		. ,	\e [\]	7 ,	٠,٠	/	/	.\	۱,	ر س	7,	٠/٠	/	λ		X
	0	9 (, 0	٠	ַם 	۲	7,	7	4	7	٦	^	, 4		ď	7	١,	þ	1	•	6	۲,	/م	•	6	Y	٦	<u> </u>	١,	\°	٧,	8	٦	PΩ	\	7	6,	7	10	4	٦'	1	, 6	رم/	٥,	۲,	∕°	۳,	70	, 6	7	7	(s	ر م/	₹"	√°	7	ارم	, 4	۵,	٠,	۱ ک	D /
111	7	7	17	7	7	λ,	λ,	7	Y	X	λ	λ.	/	7	'n	ď,)	V	Y	¥	ر,	¥ ,	λ:	'n	(u'	7	λ.	7	1	\1	A,	λ.	λ	, }	£.	J\	,	\7	۸,	λ;	h	A	Y	₁ \	ز 4	٦/	Δ)	۲ x	4	7,	A	y	7	, }	٧٦)	A,	7	'n	1	ر _د	Y :	λ
	•	•	•	,		'	/,	ν,	ν,	Ϊ.	Ϊ,	Έ,	Ι.	Ϊ.	Ϊ,	/	. /	7	ν,	Ÿ	Ϊ	1	. /	`	Υ,	1	′./	'	΄,	ľ	/	Ι,	''	΄,	Ϊ.	ľ	/	\	Ι,	'	΄.	′ ′	ν"	Ι,	/	/	Χ	Ι.	Ί,	′ /	΄,	``	1	Ϊ.	1	΄, ζ	$^{\prime}$	' '	Ϊ,	Ϊ.	/	1	΄.
		8 1	1	8	8	ş١	į	()	ĺ,	\8	\$	A)	()	/8	¥	A	9/1	ľ	à	8,	Ą,	\$	8/	8 8	(8)	8	À	8	í j	, 8	B	À	٨	βY	(Ì	8	¥	À E	8	Æ	ķ	3 1	()	8	8)	X E	18	8	8/6	1	Ý	8	(8)	8)	8,8	1/8	Ì,	1/8	8 6	(8)	(g	à,	8/
					ı	/	1	\	\	.\	`\	Ι,	. \	١,	' /	ι,	``	1	/	1	1	΄,	\	/	1	1	΄,	\	/	\	١,	ν,	\	/	\	\	١,	Ι,	΄,	ν,	\	/	/	/	1	۱,	()	$\langle \ \rangle$	΄,	ι,	ι,	\	/	\	١,	'	΄`	\	/	\	1	١,	\

Field	Cols.	
1	1 - 8	70△SCHTP
2	9	11,8,2 punched
3	10 - 80	Blank

First Card of Schedule Tape Input Deck

Schedule Tape ID Card

	ŀ	2 3	4	5
4060	. 4 . 2 . 4 . 4 . 4	0000000	Va > 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
O BA CO	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	T Y /	10000000000000000000000000000000000000	ונה פל פלילד על בליציר על מילים על מילים על מילים על מילים על מילים על מילים על מילים על מילים על מילים על מילי
11/1/		111111	\ I	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
////	//////] <i> </i>		A
25 7 25	£ 3/5 \$ 5.\$ 3/5/5 \$ 3	P 2 2 2 2 2 2 2 3	. 242 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 <u>2</u> 2 2 2 2	\$.A \$\x\ \$\x\ \$\x\ \$\x\ \$\x\ \$\x\ \$\x\ \$\x
43/3/3/	4 x 2 4 x 2 x x 2 4 x 3	3 3 3 3 3 3	Na	E WER WER VER WER WER WER WER WERE VER WER WER VER VER WER
1434	26 27 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6		\	///////////////////////////////////////
14 4 4 4	<i>أراب إراب إراب إراب</i>	4 4 4 4 4 4	344444444444444	\{ \$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$
رکو کو دکو)	4		Neesessessess	3.4.5° 5.6° 5.6° 5.6° 5.6° 5.6° 5.6° 5.6° 5
5 d 2/3 d	2/2 4 2/2 4 2/2 4 2 6	b 2 2 4 2 4	33333333333333333	7,22, 4,22, 6,24, 6,24, 4
\$ 3/3 B 3	er g e e g ere g e/e	6 6 R 6 R	6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	de de de de de de de de de de de de de d
777,	7 -	L - V // /)	Y	
$\lambda \lambda \lambda \lambda$	y y y y y y y y y			<i>`\</i> \$\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$\\$
y dely d	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	8 8 8 8 8 8		yead wed yead yead wat a wa k wa k wa k wed k wed k ed k of
111,	111111111	1//	N	a ve a ce a ce a ve a ve a ve a ve a ve

Field	Cols.	
1	1 - 16	Blank
2	17 - 19	Job
3	20 - 24	Blank
4	25 - 40	Comments
5	41 - 80	Blank

First Card of Each Job Deck

JOB Card

					1.					;	2		3							4																	5												
9 0	Ų.	ď	o St	0	0	6 9) 0	0 (0 0	0 (0 0	0 (0	0 0	0 () d	0/0	Ý	y	Zg	90	24	À	90	90	Z	90	9/0	Ď	0 1	γo	7	6 9	70,	10	69	, <u>7</u> 0,	7	7
נ'ץ ז'ץ	\1	X	١.	•	•		'n,	١.	١.			1 /	١,	١.	ı.		7 20 1	29 3	1 1	1 1	3 34	35 3 1 1	6 37	38 38 1 1	1	142	1 4	1/1	1	1	\$0 51 1 \ 1 \	52 5 1	354	36 56 1 V	71	(34)	1 /1 10 ey	/1 /2 6	NA.	1 1		•	•	٠.	(1) 13/4	٠.		1,	/
ų 2	12	X	2/4	2	$\langle \lambda$	ξŻ	(s)	(2)	ζÌ	2 :	2 2	8/	2	ų 2	2	2 2	2 2	2 2	2 2	2 2	2 2	2 2	2 2	2 2	2	2-3	2/2	y	X	2 8	2/8	y	Z	2/8	y	X	2/2	2/2	X	2/2	2/2	y	2 x	2 Y	2 2	ξŻ	2 <u>3</u>	<u>,</u> 2	٧
ۇ ي	\ 3	3	3/3	3/	À	z/s	3/2	3	وکو	3 :	3 3	3	3	g 3	3	3 3	3 3	3 :	3 3	3 3	3 3	3 3	3	3 3	3	3/3	3/3	3/3	Z	3 8	λż	3/2	1	3/3	3/3	1	3/3	3/3	1	3/3	3/3	3	3 3	3/	3 y	3 3	3 7	(3	٧
4 h	4	¥	e já	þ	X	N	'n	y	6)	4 4	4 4	6	4	y)	4	4 4	1 4	4 4	4 4	4 4	4	4 4	l 4	4 4	4	Ż	'n	N	X	e y	4	1	X	N	1	X	Ŋ	N	Y	Ż	V	À	4/4	'n	64	4 <i>h</i>	44	4	Ν
5 5	(5	Þ	5/5	3/	3	5 6	5/5	À	5 3	5 :	5 5	6	15	ŧ 3	5	5 5	5 5	5 :	5 5	5 5	5 5	5 5	5 5	5 5	5	<i>5</i>	5/6	3/5	,	5\6	5/5	3/5	Ì	5/5	3/5	Þ	5 6	3/5	<i>, ,</i>	5\5	3/5	1	5 6	, 5\1	5 3	5 š	5 }	(5	V
6/5	6	É	ş	þ	, de	6/6	g/e	À	6 8	6 1	6 6	6 9	\S	r è	6	6 6	6	6 (6 6	6 (6 6	6 6	6	6 6	6	e Je	6/6	9/6	1	6/6	6/6	8	É	ę,é	9/6	B	6/6	9/6	à	6 e	à/e	à	6 6	, 6/1	6 d	6 k	6/4	6	٧
1/1	(1	Y	y)	X	ÿΓ	ý	X	X	7	7 7	ζ)	7	X)	7	7 7	1 7	7 7	7	7 7	7	1 1	1 7	11	7	b	γr	Ŋ	1	γ'n	Ŋ	X	A	уf	λ	X	y	γį	X	ĮΥ	λ	X	γį	þ	λX	7 1	1/4	4	٧
d,	13	Y	þ	1	1	8/8	Ŋ,	B	8/4	8	8 8	8)	8	1	8	8 8	8 8	8 1	8 8	8 8	8 8	8 8	8 8	8 8	8	9/8	3/8	9/8	A	8 8	8	1	8	3/8	9 8	1	8/8	g/s	1	8 8	8/8	B	8 8	8/1	8 8	8 8	8/8	()	V
λj	13	Ŋ,	ė	1	Ž	ķ	3/8		9/9							9 9	9	9 9	9 9	9 9	9 9	9 5	9	9 9	9	y'e	3/5	1	Ì	9 / 9	9/9	9	1	9/9	3 3	8	3/6	3/2	Ì	9 /9	3/4	روا	9 9	9/	9	<u>9</u> /g	ž.	و ا	Ņ

Field	Cols.	•
1	1 - 16	Blank
2	17 - 19	REM
3	20-24	Blank
4	25 - 40	Comments
5	41 - 80	Blank

Optional Comment Card

REM Card

						1			,				2	ļ																																														_		
		'							۲				J																					7																										ð	ı	
0 0	0	0	-	-		-1-	_	-	-	-	_	- 1		-1-	_	-	-		_	_	-	-	-	-	_	_	_	_		-	_	-	-	-		-	0	0 0	0	0	0 (0	0	0 (0	0	0 0	0	0 (0	0	0 (0	0 1	0 0	0	Q	Ø	g/o	6	70,	Q I
1 2	3	4	•	-		٦,	•••	•••					17 1	٠Į''	-																						46	7 4	4	50	51 5	2 53	54	55 5	5 57	58	50 H	61	67 B	3 14	65	# 6		88 7	70 7	1 72	13	74)	ųπ	ιyί	¥	ψ
11	1	1	1	1	1	1	1	1	r 1	1	1	1	1 1	1	1	1	1 1	1	1	1	1	1	1 1	1	1	1	1	1	1 1	1	1	1	1 1	1	1	1	1 '	1	1	1	1 1	1	1	1 1	1	1	1 1	1	1 1	1	1	1 1	1	1 1	1 1	1	1	Ņ	/ ! !	1	1,	1
2 2	2	2	2	2	2 2	2/4	2	2	2 2	2	2	2	2 2	2 2	2	2	2 2	2	2	2	2	2	2 2	2 2	2	2	2	2	2 :	2 2	2	2	2 2	2 2	2	2	2	2 2	2	2	2 2	2	2,	2 2	? 2	2	2 2	2	2 2	? 2	2	2 2	2	2 :	2 2	! 2	3	2\i	Ś,	\ 2	Ŕ,	٩
3 3	3	3	3	3	3 3	3	3	3	3 3	3	3	3	3 3	3	3	3	3 :	3	3	3	3	3	3 :	3 3	3	3	3	3	3 :	3 3	3	3	3 :	3 3	3	3	3	3 3	3	3	3 :	3	3	3 3	3	3	3 3	3	3 3	3	3	3 3	3	3 :	3 3	3	3	3/1	a 3	/3	Y'	3
4 4	4	4	4	4	1 4	4	4	4.	4 4	4	4	4	4 4	1	4	4	4 4	4	4	4	4	4	4 4	1 4	4	4	4	4	4 4	1 4	4	4	4	4 4	4	4	4	4 4	4	4	4 4	4	4	4 4	4	4	4 4	4	4 4	4	4	4 4	4	4 4	4 4	l 4	À	'n	()	ķ	X	λ
5 5	5	5	5	5 !	j :	5	5	5	5 !	5 5	5	5	5 5	i 5	5	5	5 :	5	5	5	5	5	5 ;	5 5	5	5	5	5	5 !	5 5	5	5	5 :	5 5	i 5	5	5 !	5 5	5	5	5 5	i 5	5	5 5	5	5	5 5	5	5 5	5	5	5 5	5	5 !	5 5	5 5	5	ز و	5 5	\ 5	Ł	<u>5</u> \
6 6	6	6	6	6 1	; (6	6	6	6 (6	6	6	6 6	6	6	6	6 (6	6	6	6	6	6 (6 6	6	6	6	6	6 (6	6	6	6 (6 6	6	6	6 1	6 6	6	6	6 6	6	6	6 6	6	6	6 6	6	6 6	6	6	6 6	6	6 1	6 E	6	6	ę١	/ 6	6	K	6/1
11	7	7	7	7	1 1	7	7	7	7	17	7	7	7 7	1	7	7	7	17	7	7	7	7	7	7	7	1	7	7	7	1 7	7	7	7 7	7 7	7	7	7	1 7	7	7	7:1	7	7	7	7	7	? 7	7	7 7	7	7	7 7	7	7 :	1 7	17	7	X)	ý	X	K,	1/
8 8						ı						- 1		1																																											1	١	`	`	,	6)
						1						- }		l																							_		_			_			_		9 9										1	١,	١.	\	\	١,

Field	Cols.	
1	1 - 8	SPSJOB△△, Left Justified
2	9 - 16	Program ID, Left Justified
3	17	Input Option } See Option Table
	18	Input Option Output Option See Option Table
4	17 - 72	Comments
5	73 - 80	Blank

Used with Schedule Tape Mode Programs
See Operating Summary Table for List of SPSJOB Cards

SPSJOB Card

	1				2																									3																														
						_	_	_	ν-	_	_		τ-	_				_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_	τ-		_	_		_		_	_				_	_	_		_	τ_	_	_	_		_	_	_
	0	•	-		, -	J. ~	7	״.			\ -	7	-7	•	7 -	₹	7	- 7	_	١-	τ.	-7.	٠ ٦	-	١-	٦.)	τ	٦.	~.	τ	٦.	٦.	Υ-		0/0	9	0 X	0	ð	7	Ā	(0)	91	70	À	7	À	0	90	70	٦.	0∕ט ריים			₹-	ν.	7	- (-	٠, ۲
111	1	1	1	1 1	i	į	¥	Ž	V	1	j	Ï	/	Ŋ	(1	Ţ		V	7	1	1	Ź	X	7	1	(Ţ	Á		Ŋ	//	Ź	1	V	7	V	Z	<u>``</u>	1	1	1	X	1	7	V	1	1	X	1	1	7	٦	Ŋ)į	Ŋ	()	1	Ĭ,	Ņ	V
2 2 2	2	2	2	2 2	2	1	ş	λ	$\langle \rangle$	/y	ž	y	2\ \	ξ)	1/2	Q	y.	2 1	Þ	3	8	2\/ `	X	2	δ,	1	ys	×	y	5 _/ 8	þ	y	१्ष	X	Ż	\$\\$	y	2 }	(2)	S)	2\2	8	2	\$	3	×	žγ	X	2	2 2	\2\	X.	2 / 2	ş	2)	ŁŻ	Y	à	2\8	()
3 3 3	3	3	3	3 3	3	3	3	3)	1	13	Ą	Þ	3/	1	1/3	Å	3/	3/3	3	४	7	3\: '	6 }	3	A,	3	3/3	1	3/	3/3	13	Z)	6/3	4	3/	t j	ð	3 ;	1/3	3	3/3	18	3	3;	3/3	Ì	3\3 \	(3	3	8 3	13	3	3/3	3	3 !	3	Y	3	3 8	3
4 4 4	4	4	4	4 4	4	•	þ	4,	Y	Y	×	ý	4	4	ķ	¥	*	1	4	Y	ý	4	()	4	X	À	i ji	þ	4)	4	4	A,	1	K,	A)	1	ħ,	6,	(a)	*	1	X	y	4,	4	¥	*/	()	(a)	4	Y'	X.	N	À	4 X	4	Y	À	1	γ,
5 5 5	5	5	5	5 5	5	3	5	5	\ ;	, }	è,	5	5	1	\$	ž	5\	5 9	5	Þ	<u>}</u>	5)	5	\ 5	7	5\ \	₹ 3	5	6)	5	15	Ž	5\5 \	1	3	3 \5	Þ		15	5	3/5) 5	5	5)	5 5	1	5 \ 5	é j	5	5 5	15	3	5 ³ 5	3	5 ?	5 5	\$.	5 3	1 5
6 6 6	6	6	6	6 (6	9	6	E (V 6	ď	6	Ŕ,		Ŋ	, '	à	6)	6	Þ	Ŕ	6 /	6)	6	6	B	/ 6	6	/e		9/6	6	ď	6/6	à	6/	6/8	8	6/	1		6/6) 	6	61	6	Þ	, e/é	á i	6)	E 6	,6	8	6 / 6	þ	67	E G	16	6	6)	9,2
111					ĺ	٨	()	΄,	\	/	/	、'	ľ	\	\	\	\	/	. '	ľ	\	\	$^{\prime}$	、`	\	/	\	\	΄,	\	\	Ι.	\	/	\	\	\	/	/	/	/	/	/	1	' \	ν,	Ι,	\	/	/	′ ,	\	/	/	/	.\	, \	\	/	1
1 1 1	8	8	8	8 8	8	8	١	Ŋ	1	1	8	À	Ŋ	(ا	1	Ŕ,	4	1	18	, \$	8	9	þ	A	8	8)	1	Y	,	8 8	(b	8	6,8	8	8)	18	8,	1	18	8,	6	8	8	4	8/8	×	8 Y /	8	8)	1	1/8	8 /	8 9	8	å j	8	8	,	8)	1

Field	Cols.	
1	1 - 8	END∆ CASE
2	9	11, 8, 2 Punched
3	10 - 80	Blank

Used with Schedule Tape Mode Programs

END CASE Card

			Į.						1	2		3				4					5														6															
969	٧-	٠, -	٦.	τ.	٧.	-\-				-	I- /-	٦.		1 -		-		-	- 1-	_	-		١ ١ .	- τ	- 1	,		١.	τ.		-(-	٦.	٠,	- /.	٠,٦	10) d	0 0	0/0	ď	6 9	g	0,0	Þ	o/q	<u>Z</u> i	g o	Z	P	2
1/1/3	١.	١.	1/1	١.	١	١.		١ ١			11	١.	`	1					•				١ ١		١	١.	١.	١.	١.	١,	١.	,		`	١.	١.	١.	•	`	١.	١.	١.			`	`	١.	١.	•	1
2 2 2	2	ĮΣ	2 <u>2</u>	λ,	2	R 2	v)	12	2 2	2 2	2	1	2/2	2 :	2 2	2	2 2	2	2 2	2	2 2	2	٧)	\ 2)	2 X	2/2	y	2/2	2	ر ا	8	13)	2 2	2	, y	2 2	3/8	Y	2 2	2	R 2	X:	3/3 /	y,	2 2	2/2	\ !\	<u>,</u>
3/3/3	\ <u>3</u>	a 3	ş)	3/3	(3)	ş 3	3	1 3	3 3	3 3	3/2	Z	3 8	3	3 3	3	3 3	3	3 3	3	3 3	3	ą :	3/3	,	3 8	3/3	3	3 3	3	3	3	\3 \3) }	3 8	3/	,	3 3	3/3	3	3 3	3	2 3	3	3\3	` `*	3 3	3/	٤,	\ \3
4,	4	1	4 }	, l	,	4)	<i>(</i> •)	\ \4	4 4	1 4	V	X	44	4 .	4 4	4	4 4	4	4 4	4	4 4	4	•	M	X	'n	X	1	À	'n	ίy	4)	4	X	'n	X	Ż	4	1	Y	1	'n	4)	ď,	\ \ 4	X	'n	À	1	ļ
\$ 5 }	\ ⁵	5 5	5 3	,5 5	5	5 3	5	5	5 5	5 5	3/5	1	5 8	5 :	5 5	5	5 5	5	5 5	5	5 5	5	5 }	5 /5	,	5/6	3/5	5	5 }	5	5 S	5 ?	\ 5	٠ ا	5/5	5/5	,)	5 3	5 6	1	5 5	5	5 3	5	5 _, 5	\	5 8	3/5	رکر	\ 5
6/6/8	رو/	é 6	é è	6	6	6 9	6	6	6 6	6	6	Ì	6 6	6	6 6	6	6 6	6	6 6	6	6 6	6	6 8	3/6	E E	9/6	g/t	B	6 6	è	é g	6)	6	e i	g/6	g/E	j Je	6 6	6/6	À	6 6	6	é 9	6	6 6	61	6/6	6/4	À	6
XIX	1	k	ر ۶	<i>x</i> 1,	<i>\</i>	ίş	4	(1)	7. 7	7	N,	Y	y	7	7 7	7	7	7	7 7	7	7 7	7	()	1/3/	1	y	þ	X	yŗ	y	, λ	7	(³)	y)	λį	λ;	X	y	y	7	γ,	<u> </u>	$^{\prime}$	J)	Ŋ	7	y	Y	X	į
8 8 8	8	s)	8 8	8	8	8	(8.	r 8	8 8	8 8	R 8	8	8/8	8	8 8	8.	8 8	8	8 8	B	8 8	8		8/8	8 8	8)A	1	8/8	À		8	1		\ 8 [']) B. E	1	8	V	À	8 8	8	8	8	A 8	8) 8	A E	1	,

Field	Cols.	
1	1 - 16	Blank
2	17 - 19	RUN
3	20 - 24	Blank
4	25 - 32	Program ID, 8 Characters or Less - next field may follow directly
5	33 - 37	, DATA if Data Follows
6	38 - 80	Blank

Used to Run Manual Schedule Tape Mode Programs

See Operating Summary Table for List of RUN Cards

				,								2	ı		1																	1																				
					_					l		•			İ																	J																				
10x	0	0	Q	à	0	(O	8 0	Ø	<u> </u>	0	0	0 0	0	0 (0 0	0	Q	Ó	ď	<u>0 /0</u>	0	00	Ŋ	ý	0	<u> </u>	Q	QO	Þ	0,4	0	Q O	Q	Q	9/0	B	0.4	Ó	ÓÓ	0	0	Q	Q	N	0 0	/ 0/	á þ	70,	00	70,	7,
1/8	١.	١,		`	١.	١.			`	1						١.	١.	١.		١.	١.	١.	١.		`	١.	1/3	٠,	44 A	١.	١.	Α.		٠,			Z.,				-7	4 85	36/4					i V				
,/, ,	\"	\	1	`	,	Υ'	ν'	1	'\'	ľ	1	, ,	•	•	1	' 1	Ϊ,	Γ'	1	^	' \	(')	΄,	/	'\'	, ,	′,	٧'	\'	/	, A	''	γ.	' '	1	7	``	' '	۸,	٧,	\'	\'	٧'	1	, '	/ 1	\'	1,	۲,	Λ,	۲,	\'
3/2 }	L Ž	v2`	X,	ķ	λ	; <u>}</u>	ąź	V	λ	2 2	2	2 2	2	2 2	1	2/2	χ	2 }	1/2	X:	2∕2	λ	2 2	<u>`</u> 2	1 2	2 ' 2	2/8	2	ų 2	ş	℀	à	2 2	2 3	ξ2 [`]	2 2	1	2/2	įλ	2 Z	(2)	₹ 2 ⁾	ų?	<u>\</u> 2	X:	2 ' 2	2	ą Ż	v)	2 2	3)	ŧί
/./	,	۱,	١,	۱,	١.	.\	λ	١,	ν.	١.		• •			١,	١.	1	\backslash	` `	√,	λ,	/	λ	,	<u>,</u>	١.	λ,	/	.\	١,	ν,	1	λ,	λ,	. /	` /	۱,	١.	/	λ	/	. 🕽	'		\ \	۱,	7	.\	7	7	(,)	١,
3/3;	/3	Á	7	1	v	, 7	3 3	1	1	13	3	3 3	3	3	١	3 4	2	۶,	1/3	4	s y	(s)	٠, 3	13	1	s Á	40	\ \	y 3	4	2/2	3	3 %	31	(3.	43	Á	3/2	, ,	3 3	3	(3	٧,	1/3	1	3 8	3/	12	3:	3 /3	A	1/3
14)	(4	¥	λ	¥	À	ıλ	4/4	4	¥,	14	4	4 4	4	1 4	ķ.	λı	À	4)	(4	¥.	Ŋ	¥	44	(4)	ų i	V	4	,	44	⟨₄`	44	¥	1/4	À	ιş	e à	4	λı	À	44	(4)	į À	4)	K4	X	Ņ	Y	1 /	(4)	4 4	γì	V
ι.\	. \	ر ء،	ζ,	ν,	΄,	V.	Σ.	Ϊ.	_)	J.	_		_]	, ,	V.	_/	. \	۱.	7 -	1	7.	.\	.\	۱ ،	ν,	\	λ.	7	٠,	۱.	λ.	Ι.	.\	λ	\	٠.		7	7	.\	7		ſ,	7-,	7	7	7	_	′ /	۱.
5/5 }	1,0	Š	2/	, 3	2/	, 3	7 C	2,	9:	7	3	3 3	5	3 5	7	2/3	3))	1,2	8	2/2	2	2 2	/2	6:	2/2	3/3	3	2 2	2	8 3	8	26	2/	, 2	2 2	1/2	1,	3) 2 3	۱ د	6 2,	9:	1/2	3	36	2/))	/2 ;	1,0	4:	2/4
6)	į 6	6	À	i k	6	ì	6∕4	é	(a)	1 6	6	6 6	6	6 6	5	6 /6	É	6/4	; 6	٠Ę`	g/g	K	6/1	i 6	ફ ફે	6	B , 6	Æ	6/6	ş	e g	√6	9/6	6,1	i k	6/8	(6 ⁾	6 9	6	6/6	6	, b	6)	, 6	E	5 \ 6	À	<i>3</i> 8	(8)	6 6	ફો	1/6
٦.	.\	· -	΄.	Ĺ.	7	7	7	\	7	L	_					`	ζ,	λ.	.\	_/	٠. ٧	V,	Ϊ.	. \	.\	' /	7	۱-	7.	/	7	_/	٠,	◟.	ν,	Σ.	7	.\	۱ -	7 -	Ι.	/	7	.)	$\overline{}$	7',	7	Λ,	7	7	7	٠ ،
In	(ı	У	Λ	١,	<i>'</i>	(Λ	Ųγ	(,	1	Ψ′	I	, ,	1	1 7	K	V	X	11	(r	γ	N	٨	, A	$\langle r \rangle$	V,	Ŋ	1	X	$\gamma_{'}$	^	('	V	V	V	1	ľ	1	γ:	У	Ν	^	, v	()	V	X.	yı	$^{\prime} $	(Y	1	(r	ζ,	V
l s	,	\8 `	À	Ì	8	j	, l	(d	8	ds.	8	8 8	8	8 8	8)	1	N	6	8	B, 8	1	: /4	9	s)	8	a 8	8	8/8	À	18	8	1 1	8 1	1	N	è	8	λ8 [`]	8 8)	s &	8	(8	١,	'n	d	1/1	18	8 8	(8)	ķ
1	/	/	1	`	\	/	/	/	/	ľ					Λ	1	, Ι	΄,		/	/	. \	``	/	/	\	. \	\	' '	΄,	\	/	/	\	- \	΄,	\	/	/	-\	`\	, ,	\	/	\	′ /	、	ι,	\		/	1

Field	Cols.	-
1	1 - 16	Blank
2	17 - 23	ENDDATA
3	24 - 80	Blank

Required if RUN Card Used

	ŀ			2																						3						•																				
0 0	0 (0	0 (0 0	<u>y</u>	0 0	(O	Ž	9	0	0 (V	ď	0 0	01	10	Ø (Į,	9	0 0,	(0)	Q (þ	0,1	Ŋ	0/0	1	<u>o </u>	00	0	Q O	Ø	M	9/1	ď	0 Q	O	1 y	J 0,	<u>(</u>	o 0	VO.	D, O	P	0/0	M	9 0	(0)	e d	v	Ø.	7
1 2 3	4 :	6	7	٠,	Ų.	ıλı	۶; ۱	14	1	·γ	19/1	29	21	23	3 4 2	5 Ke	2/12	8 ZÌ) 30	31 (3:	ıβ	ыÁ	5 3 d	(17)	4 39	40 4	1/45 1	ıλμ	4	· >	y u	50\g	1 23	£ 82,	(55)	5 57	\60 :	9/40	y/r	g gal	eyb	5 À	67 b ę		(07)	V2 1	13/74	λŧ:	प्रक	'n	ſη	Ą
11	1 1	1	1 1	ıþ	[1\	١)	1	×	11	1	Į i	1	V	1 1	۱۱	(1)	1	/1	ħ	1)	/1)	1	y		1	/ 1 /	1/	1 y	17	\ ¹ `	(1)	1	y	V	X	1 1	<u>'</u> 1\	(1)	1)	$\langle 1 \rangle$	()	1	ŹΙ	Á	1/1	Ų,	1 1	1,	1/1	Y	Ŋ	, 1,
2 2 2	2 2	2	2 :	į/	2	2 3	\2 \2	¥	2\2	Ż	2)	.\2	Z	2 2	2\i	, 3	2	1\2	Z	2 2	(2)	४३	14	y:	2/2	2 /2	à,	2 2	2 2	2	2 2 ⁾	१ रे	\\$\	\ 2	À	2/2	y	ξŻ	2 2	3	१ वे	\2 [`]	2,2	\s	2 \2	y.	2 2	2	2 2	<u>'ع</u> ِ	λ	γ\
3 3 3	3 3	3	3 :	3 3	3	3 3	1,3	3	3/3	3	3	\ 3	4	3 [`] 3	3/	٤ پ	3	, 1	3	3/3	3	ષ્	1/3	7	3/3	3/3	X	3 3	3/8	3	3 3	3 }	\3 [\]	3 3	Já,	3/3	3/:	k E	3/3	(3)	y 3	Ŋ	3 3	\3 [`]	3/3	3	3 3	3	ą 3	७	3/	, §
144	4 4	4	4	4	y	()	\ \ \$	¥	N	À	,	(4	¥	ķ	Y	1	(1)	\ \	¥	V	Y	4)	14	À,	Ŋ	N	À	4	N	y	• >	4)	(4)	X 4	Ŋ,	y,	À	į	Ą	À	4 4	Y	X	¥	4×4	X	1	y	4 }	Y)	À	,\
5 5 5	5 5	5 5	5 !	5 5	5	5 3	\ 5	` 5	5/5	é j	5/5	, 5	৻ঽ৾	s√5	3	j 5	5	\ i 5	5	5 \5	3	5	, 5 5	إيخا	5/6	3/5	1	5 \$	5\5	3	5 3	5 3	5	Ę ŝ	, \$	5 \5	3	5/5	5 \$	3	5 5	\ 5	3 \5	¥	5\5	5	5 \$	5	5 5	\5	5 .	5
666	6-6	6	6 (6	8	6 8	\6	Ę	6 K	à	6 I	, 6	Æ,	è/6	8	, E	6.1	, 6	\ 6	9/6	E	6/1	, 6	ر ا ع	6	9/8	d	6 6	6/6	A	5 6	6/1	6	é 6	\6	g/e	K	, E	6/6	6	e j	15	6 ₆	E,	8 /6	8	6 E	6	6 B	6	B (6
171	7 7	7	7	7	7	z)	() ()	X	1	<i>()</i>	1	(1	Y'	1/1	X	Y	1	Ì	v,	7.7	X	1/2	7	γ)	Ŋ,	Y	X	7/8	уr	y	X	'n	1	(<u>,</u>	V,	7	X	iÁ	yı	y	ıγ	(1)	X7	'¥	y	J.	įλ	1	ίş	Í,	Į.	1
888	8 8	8 8	8 1	8	8	ફો	\ 8	Ą	8	þ	8	(8	\ و	8	8	8	M	1	\8 [']	1	8	18	6	8	8	8,8	B	8 8	8/8	1	8 8	1	g	8 8	18	8,8	8	8	Ņ	y	8/8	8	8 8	¥	8/8	N	8 8	8	6	8	8	8
999					1	.\	١,	٦,	λ.	Ι.	/	۱.	ر مر	۷,	,	٠,	١,	Ι.	۱,	ر م م	\	/	, /	(۵	۱,	ر م	\u^	'n	٧.	7		λ	7	Λ	۱.		ر ما ا	٠,	۶,	7	Λ	۱,	، ،	\ a `	۱,	١.	./	1	٧.	۱,	•	/

Field	Cols.	
1	1 - 8	ENDOFJOB
2	9	11,8,2 Punched
3	10 - 80	Blank

Required to Terminate Each Job Deck

END OF JOB Card

	ı	Ì			2																								3																													_
	0 0	0	0 0																	0	ì	7	6	(0)	Ą	Vo	1	0 1	ίδ	0 0	(0)	0 0	NO.	7	7	Y	7	7	à.	2	a d	Va	7	V	ħ	ıΛ	, h	'n	5	X.	7	λ	'n	1	W.	<u>س</u>	7	
1 2 :	1 4	5	. 7	•	'n	ſij	45)	y h	(1)	γ• ΄	γì	1	þ	X 1:	χŚ	ıλ	25	*	γz	À	æ	ųχ	33)e i	35	e s	/×	٩	ı yı	ıλı	ıΨ	ιλ	٠À	*	6 9	(51)	¥2 :	عرفا	*	Ž,	17 3	7	w)	. 2	vo'	Š,	\ ,	X	"	7	, 71	12	χ,	λ	Λ,	X.	$^{\prime}$	١,
1 1	1	Ī	ĺ	1	R	١,	/١	ĺΑ	1	'v	١١	()	۸/	11	(†	Ų	X	1\	(N	Ţ	Ź.	yı	ħ	√1 ′	1	J/I	٨	ĮΊ	/1/	f)	1,	ίĮ	/ 1	1(1	1/1	X	1/1	Ì	₁ /	(}	Ņί	A.	λı	ľ	1	ıΊ	ì	v'	1	/	X	À	1	ľ	11	١,	Ň	/
2 2 4				- 1	1	\	\	\	\	`	\	\	\	\	\	_ \	,	١.	١.	\	١,	ι '	\	١.	`	. '	\	`	\	\	\	1	١.	١	٠,	ι,	\	\	\	`	١.	١.	١,	١,	`	\	\	١	١.	٠,	\	`	Λ.	Α.	ľ	7	(/	ι,
2 2 2		۷.		4	ľ	ヘ	ζ,	⟨¹	/v	Á,	ξ,	\Z	Y	¥	X /2	/2	٦	ZŊ	(2	Ϋ́	Υ.	2 Y	Z	√²	₹.	ZΥ	λ	2 3	21	₹2	γ.	R 2	¥	¥.	2\X	λ	2 Y	2	, 2	१ :	Ŋ	X.	Zγ	Z	Ż	ą)	(2)	\sqr	X :	5,5)	(2)	8 ;	2\2	ķ	À.	2√2)
3 3 3	1 3	3	3 3	3	h	y	رو	٠,	Y 3/	(3)	ر و	١,	/s,	, و	۲,	13	•	λ.	Ι.	,	٠,	λ,	1	١,	٠Ì	۸,		⋄	λ.	ړ,	.,\	. \	۱,	ν,	١,	/	λ	.\	7	. \	٠,	Γ,	7	7	7	Λ	. \	' '	` `	١.	/	.\	_ \		7	``	Ι.	\
		•		1	ſ	/	Ζ.	7,	/	. \	Ί.	/	ν,	^	"	ν,	7	٠,	΄΄	7	1	, 4	\ "	γ,	1	. 4	' •	, ,	(3)	ζ,	γ,	٧,	7	1	, 4	۱,	7 1	/3	'n	₹.	y	٦	3 /	7	3,	43	/3	Á	3/	3 8	(3	3	7.	Ŋ	1	3/	3 Y	(:
4 4 4	1 4	4	1 4	4	ļ	(4 ⁾	4)	Ŋ,	V	¥	Ņ	V	¥	À	V	¥	¥	λ	ı À	4	¥,	V	1	4	¥.	λ	À	W	λ	'n	4)	ı i	M,	1	'n	y	Λ	. 🛦	u)	1	V	λ.	Λ	ıλ	λ			v,	λ.	7	λ		, ì	V.	7.	λ	λ	. \
				Į	,	١.	١	١,	١,	١.	\	`	`	`	١.	\	`	١.	\	\	١	. '	١.	1	١.	١,	١.	١.	\	`	١	١.	١	١.	١.	١	`	1	1	`\	. \	. `	١.	\	`	1	1	١.	. `	·	1	1	١.	١,	١,	ζ,	Ι.	/
5 5 5	5	5	5	5	i 5	\ 5	٤:	√5	É	5	5 Y	5	₹,	,5∖	§ 3	₹,	5	5,	t)	,5`	٤ إ	5\5	3	(5)	١,	5 \ 5	3	5\\$	3	5 5	\5\Y	į Š	\$	١,	5 Y	5\	5 }	(3	(ي	١,	7	5	5 \	5	5	5 5	\5	ž	⅓	i ` 5	5	5	ž :	i\6	À	5	6 a	k.
					N	١	١.	٠,	`	`	١.	`	١.	\	١.	\	١.	١.	١.	\	١	. `		١.	١	٠,	``	`	`	`	`	١.	١.	١,	`	١.	١.	١.	١.	`	٠,	١,		١.	١.	١.	١.	١	. '	١.	\	١.	١.	١,	``	`	\	Α.
6 6 (, ,		, .	ا	יו	7	7	þ	•	,	١,	/8	1	7	1	10	۴	۱	1/6	6.	۱	Þ	· B,	6	1	e Ae	B	6 %	Ø	5 6	/6 Y	įG	1	B√6	Ē	ĺ₽/	é	\ 6	6 1	4	į	6	6 Y	į 6	é	B (6	é	ķ	6/	jb	(6)	Æ	ð⁄6	j	6	ρ)	ē, 6	V
777	7	7	7	7	1	۸,)	/	7	1	,\	ί,	'n,	۲.	۲,	a,	۸,	λ,	7,	١,	, \	۲,	1	,	٠,	, , <u>, , , , , , , , , , , , , , , , , </u>	1	7,4	7	Λ,	1/2	ζ,	٦,	١,	.\	7	λ,	,	′′	۱ ،	Α,	7.	λ.	7	7	` ,	Ľ,	7,	/	7	'	ر ً	` '	Ŋ.	7	_\	.)	١.
	•	•	ĺ	1	Ň	Ι,	΄,	′ '	Λ.,	Ÿ	Λ,	/	1	\mathcal{I}	΄,	Ι,	`)	′′	Ι,	$^{\prime}$	΄\	Ι,	٦,	١,	1	Υ,	$^{\prime}$	′ ′	ν',	``	′′	ν,	Υ	γ	্ম	′′	′`	Υ	1	7	Ι,	٠,	(Λ,	Y	ヘ	X	$^{\prime}$	(1	√,	У	X	V	्र	$^{\prime}{}_{ m V}$	⟨ः	√,	٧
	1	8 1	8	8 1	H	À	Ņ	ď	(d	8	ę į	Ŋ,	A	À	V	ø	à	1/8	X	À	8\	ď	à	8	8	N8	Ì	8/8	N	8	Ŋ	8	\B [\]	1 8	1	Ŋ	8	8	wa)	λ	'n	'n	١,	, g	•	à á	4	Y	'n	٤,	رa)	۱ و	λ	7	3/	(ه		V
				- 1	1	١	١.	١.	\	١.	١	١	٠,	`	`	`	١.	`	`	`	1	١.	`	١.	١.	١	. '	`	`	`	١.	`	١.	١.	. '	١.	١.	١.	١.	٠,	` '	\	`	١.	١.	١.	١,	`	`	\	١.	١.	٠,	١.	١	١.	`\	
9 9 9	9	9 1	9	9 9	3	9 \	γę	1	(8)	ð,	١,	Ņ	ı	9/	B, i	٨	9\	ê,ž	8)	9/	Ó,	į Ì	(9)	٩/	Q S	Ŋ	1	9 ' 9	Ŋ	3	94	Ì	/9 ·)	1 9	1	Ì	9 9	(9)	Y	N	Ì	ď	e e	۱9)	9	b	'n	ď	9 }	رو <u>ا</u>	۱a)	1	V	i à	\e.	9	6	١

Field	Cols.	
i	1 - 8	ENDS CHED
2	9	11,8,2 punched
3	10-80	Blank

Last Card of Schedule Tape Input Deck

Schedule Tape END Card

```
SEMINADADE AALS
SEMINADADE AALS
SEMINADADE AALS
SEMINADADE AALS
ACQUISITION FILE STORAGE DLOCK
ABSOLUTE MAXIMUM FOR RANGE RATE RESIDUALS (IN DC AUTO REJECT)
EXECUTIVE INDUIT BUFFER RANGE AND ANGLE RESIDUALS (IN DC AUTO REJECT)
EXECUTIVE INDUIT BUFFER RANGE AND ANGLE RESIDUALS (IN DC AUTO REJECT)
DOT PRODUCT OF A, D OR L BAR WITH DELTA L BAR
DOT PRODUCT OF A, D OR L BAR WITH V BAR
RIGHT ASCENSION OR L BAR WITH V BAR
RIGHT ASCENSION OR AZIMUTH RESIDUALS
A A T EPOCH
A/R
RIGHT ASCENSION OR AZIMUTH RESIDUALS
A SSOC STATUS
COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
Y COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
Y COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
X COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
X COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
X COMP OF A BAR OR A BAR TILDE, UNIT VECTOR PERPENDICULAR TO L BAR
X COMP OF A BAR OR A BAR TILDE, UNIT PECTOR PERPENDICULAR TO L BAR
X COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LPOCH ORBIT PLANE
Y COMP OF A BAR IN LPOCH ORBIT PLANE
Y COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LPOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN LOOCH ORBIT PLANE
X COMP OF A BAR IN L
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       X COMP OF CAPITAL R BAR: (STATION VECTOR)
Y COMP OF CAPITAL R BAR (STATION VECTOR)
COMP OF CAPITAL R BAR (STATION VECTOR)
USED IN CÖMPUTING CAPITAL R BAR
MAGNITUDE OF CAPITAL R BAR (STATION VECTOR)
USED IN COMPUTING CAPITAL R BAR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             CF INDICATOR
M/4066$DUMP ROUTINE INITIALIZE
TABLE OF PROGRAM IDS, BINARY READ
TABLE FOR BINARY READ OF PROGRAMS
PARAMETER CARD BUFFER, READ IN
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          A DRAG COEFFICIENT
TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
CADI INITIALIZE ROUTINE
CADI WAPUUP ROUTINE
CADI SUBROUTINE
CADI SUBROUTINE
CADI TAPE SWITCH
CADI INPUT SWITCH
CADI INPUT SWITCH
CADI INPUT SWITCH
CADI INPUT SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                            SULLETIN EXP.
BMEWS RESERVED ARLA
  8/15/62
SEMI-MAJOR AXIS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         CADI SUBROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                               CLOCK ROUTINE
 M/652345
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/32518
M/37068
M/37078
M/37108
M/37118
M/37118
M/40638
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/4337$
M/4340$
M/4341$
M/4342$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/33678
M/34048
M/34058
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           CFI, M/3355$
COMPACT.COMPACT, M
CONTBLU, M/2600$
CONTBLI, M/3052$
CONBUF, M/4760$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        M/3052$
M/4760$
                                                                                                                                                                                                                                                                                                                                                                                                                                                 M/3662$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                              K/3215$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         M/4343$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       M/3365$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      M/3366$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/3750$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/3406$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/3355$
                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/32$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                CADINIT,
CADREAD,
CADWRAP,
CADSRSW,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          CADI,
CADSRIH,
CADSR,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               CARDTYP,
 DECK FOR
                                                                                                                                                                                                                                                                                                                                                                                                                  AZUK,
BBUF,
dETA,
BKLOK,
bLEXP,
dMrwSp,
                                                                                                                                                                              AC,
ARSDL,
ARSDL,
ASIBX,
ASUBX,
ASUBX,
ASUBX,
ASUZI,
ASUZI,
ASUZI,
ASUZI,
ASVY,
                                                                                                                                                                                                                                                                                                                                                                       AYNC,
AZMAX,
AZMIM,
                                          ABMXZ,
ABSMX,
ABUF,
ADDTU,
ADOTU,
ADOTW,
ALPHA,
                            ABLOC,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      CAPX,
CAPY,
CAPZ,
CAPC,
CAPR,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                CAPS,
```

```
BAR
BAR
BAR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   .....
                                                                                                                                                                                                                                                                                                                                               DECLINATION OR ELEVATION

X COMP OF DELTA L BAR = L BAR OBS MINUS L GAR COMP
Y COMP OF DELTA L BAR = L BAR CGS MINUS L GAR COMP
Z COMP OF DELTA L BAR = L BAR CGS MINUS L GAR COMP
DELTA U

(1+(1-E**2)**1/2)XX2*(1-E**2)**2,E = ECCENTRICITY
CLOCK RUUTINE
DELTA A/A = CORR TO SEMI-MAJUR AXIS
DELTA A SUB XN = CORR TO E* SIN OMEGA
DELTA A SUB XN = CORR TO E* SIN OMEGA
DELTA A SUB XN = CORR TO E* SIN OMEGA
DELTA A SUB XN = CORR TO L* SIN OMEGA
DELTA A SUB XN = CORR TO L* SIN OMEGA
DELTA A SUB XN = CORR TO L* SIN OMEGA
DELTA A SUB XN = CORR TO L* SIN OMEGA
DELTA I
DELTA A SUB XN = CORR TO L* SIN OMEGA
DELTA ONDE PRIME = CORR TO L* SIN OMEGA
DELTA N/N = CORR TO L* SIN OMEGA
DELTA N/N = CORR TO L* SIN OMEGA
DELTA N/N = CORR TO L* SIN OMEGA
OF DELTA N/N = CORR TO L* SIN OMEGA
OF DELTA N/N = CORR TO L* SIN OMEGA
OF DE BAR ON DE BAR TILDE; UNIT VECTOR PERPENDICULAR TO LX
COMP OF DE BAR ON DEAR TILDE; UNIT VECTOR PERPENDICULAR TO LX
COMP OF DE BAR ON DEAR TILDE; UNIT VECTOR PERPENDICULAR TO LX
COMP WITH RESPECT TO HORIZON SYSTEM OF DEAR TILDE
EXECTEMPORARY
EXECTEMPORARY
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   222
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        ELEMENT FILE LOAD ROUTINE
MINIMUM ELEVATION
MAXIMUM ELEVATION
ELEMENT SET NUMBER
EAST LONGITUDE OF SUBSATELLITE POINT
E SUB N
E AT EPOCH
TIME OF EPOCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         EMIN TO KMS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            ELEMENT FILE STORAGE BLOCK
                                                                                                                                                                                              TEMPORARY STORAGE
TEMPORARY STORAGE
TEMPORARY STORAGE
DAY NUMBER OF OBSERVATION
OdSERVATION SORT BUFFER COS (E+W) COS NODE COS OMEGA COS U COS LATITUDL COS THETA
                                                                                                                                                                                                                                                                                                                                      DECLINATION OR ELEVATION
                                                                                                                                                                                                                                                                                                (DEG/DAY) 1 (RAD/MIN)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  END OF CASE SENTINAL
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          FLATTENING OF EARTH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        END OF JOB SENTINAL
                                                                                                                                                                                                                                                                            DOUBLE TAB ROUTINE
                                                                                                                                                      A DRAG COEFFICIENT OBSERVATION TYPE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                ECCENTRICITY
TEMPORARY STORAGE
TEMPORARY STORAGE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 EQUIPMENT TYPE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  EARTH RADII PE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          EPOCH REV.
                                                                                                                                                                                                                                                                                                                  RAD/ULG
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    E COSE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/3571$
M/3572$
M/15064$
                                  M/32525
M/3253$
                                                                                                                                                    M/3212$
M/3372$
M/3573$
                                                                                                                                                                                                                                                                                                                                                                                              M/3506$
M/3716$
N/3311$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                          M/35103
M/35103
M/35118
M/35128
M/35138
                                                                                                                                                                                                                                  M/35775
M/33438
                                                                                                                                                                                                                                                                                                M/3651$
M/3652$
                                                                                                                                                                                                                                                                                                                                                        m/35045
M/3505$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          N/32565
M/3417$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/3421$
M/3422$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/3747$
M/3257$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      M/3211$
M/3216$
                                                                          M/3254$
                                                                                              M/3255$
                                                                                                                M/3415$
                                                                                                                                    M/5416$
                                                                                                                                                                                                                M/35745
                                                                                                                                                                                                                                                                                                                                      M/3346$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  4/3515b
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      H/3516$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/3420$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          11/34235
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/34248
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/3225$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        M/3746$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/4062$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/32605
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/3375$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/3560$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             M/3653$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/3565$
                                                                                                                                                                                                                                                                                                                                                                                                                                                          M/33$
                                                                                                                                                                                                                                                                              N/21$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/425
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          EPSQD,
EQTYP,
EQUINOX,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      ERKZKMS,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      EOZ,
EBLOC,
ECASE,
ECOSE,
EJOS,
ELMLOD,
                                                                                                                                                                                                                                                                        DELTAB,
DUPRM,
                                                                                                                                                                                                                                  CZDOT,
DAYNO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    DSUXT,
DSUYT,
DSUZT,
DUM,
                  COSI,
COSEO,
COSO,
                                                                                          COSU,
COSPH,
COSTH,
                                                                                                                                                                                                                                                                                                                                    DELTA,
DELTX,
DELTY,
DELTZ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            DLIAX,
DLIAY,
DLIO,
DLINO,
DLINO,
DLINO,
DOMCF,
DSUBX,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  EPREV,
                                                                                                                                                      CO,
CTYPE,
                                                                                                                                                                                            CXDOT,
                                                                                                                                                                                                                CYDOT,
                                                                                                                                                                                                                                                                                                                DE2RA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                ELMIN,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  ELMAX,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  DSUBZ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        ELUNG,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  EPOCH,
                                                                                                                                                                                                                                                                                                                                                                                                                  DELU,
DENM,
                                                                                                                                                                                                                                                                                                                                                                                                                                                          DKLUK,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                            ULTAA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      ELNO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      E01,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    ASGN
ASGN
ASGN
ASGN
ASGN
ASGN
   ASGN
ASGN
ASGN
ASGN
ASGN
                                                                                            ASGN
                                                                                                                                  ASGN
ASGN
ASGN
ASGN
                                                                                                                                                                                            A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G G N A S G 
                                                                                                                                                                                                                                                                                                                                                                            ASGN
                                                                                                                                                                                                                                                                                                                                                                                                                  ASGN
ASGN
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    ASGN
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  ASGN
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            ASGN
```

```
BAR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                BAR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          œ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            œ
                                                                                                                                                                                  E SIN E
E SORD

X COMP OF E BAR (UNIT VECTOR FROM OBS TO EAST)
Y COMP OF E BAR (UNIT VECTOR FROM OBS TO EAST)

Z COMP OF E BAR (UNIT VECTOR FROM OBS TO EAST)
DATE STORAGE
DATE STORAGE
DATE STORAGE
DATE STORAGE
DATE STORAGE

STANSFER CONTROL TO EXECUTIVE
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTROL
TRANSFER CONTR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          OR.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            OR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      ROTATION RATE OF EARTH IN DEG/SOLAR MIN
EARTH RADI (TER
EARTH RADI I TER
ÉARTH RADI I KEMIN
END OF SCHEDULE TAPE SENTINEL
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   GET ACQUISITION FILE ROUTINE
GET I-FILE ROUTINE
GENERALIZED OUTPUT ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             FIXED TO FLOATING ROUTINE
FIXED TO INTEGER ROUTINE
CLOCK ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          LA FORMAT
CLOCK ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           FLOATING 60
FLOATING 63
FLOATING 70
FLOATING 90
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      EXECTL1, M/4/2

EXECTOG, M/4332$

EXINTER, M/43455

EXINTER, M/43455

EXINTER, M/43558

EXOM, M/3520$

EXOM, M/3520$

EXOM, M/3620$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3625$

FLUO, M/3615$

SON FLUO, M/3615$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3612$

SON FLUO, M/3625$

ASON FLUO, M/3625$

ASON FLUO, M/3625$

ASON FLUO, M/3621$

ASON FLUO, M/3625$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUO, M/3621$

ASON FLUOS, M/3621$

ASON FLUOS, M/3621$

ASON FLUOS, M/36524$

ASON FLUOS, M/36524$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

ASON FLUON, M/3621$

AS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       FXINT, M/40%
FYKLOK, M/34%
GETACQ, M/4012%
GETI, M/4013%
GLOP.GLOP.M/4050%
M/36545
M/3655$
M/3675$
                                                                                                                                                                                                     M/32618
M/32628
M/34268
M/34208
M/228
M/528
M/538
M/508
M/6028
                                                                                                                                                      M/3745$
                                                                                                                                                                                                     ESINE,
FSGO,
FSGO,
ESUBX,
ESUBX,
ESUBZ,
EXDATE;
EXDATE2,
EXDATE2,
EXDATE3,
EXECTL1,
EXECTL1,
EXECTL1,
EXECTL1,
EXECTL1,
EXECTL1,
EXECTL1,
EXECTLOG,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EXINDE,
EX
ERPFT,
ERPMT,
ERPKM,
                                                                                                                                                      ESCHED,
 \begin{array}{c} \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf{v} \\ \mathbf
```

!

١,

```
X COMPOSE THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STATE OF THE STAT
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        LOOK ANGLE SCHEDULE SUPPRESS SWITCH
DELETE ENTRY FROM SATTE ROUTINE
NUMBER OF ELEMENTS IN E-ELOCK
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         EXECUTIVE SWITCH
ENTRY TO OCTAL CORRECTION ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            EXECUTIVE SWITCH
NEXT OBS. NO.
STATION ALITIUDE
OBSERVATION FILE STORAGE BLOCK
OBS. BRIGHTNESS
OBS. NO.
                                                                                                                                                                                                                                                                                                                                              KMS TO EARTH RADII PER KEMIN
GRID INTERVAL
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           NEXT SATTB ENTRY ROUTINE
NEXT ELEMENT ROUTINE
LAST UNUSED E-BLOCK STORAGE
GENERALIZED OUTPUT ROUTINE
GENERALIZED OUTPUT ROUTINE
STELLITE ALTITUDE
FLOATING 1/2
                                                                                                                                                                                                                                                         I-FILE STORAGE
INCLINATION INHIBIT SWITCH
                                                                                                                                                                                                                                                                                                                                                                           STATION LONGITUDE
ELEMENT UPDATE ROUTINE
OBS NO OF R TAPE
LAST OBS NO OF R TAPE
EXIT FOR MANUAL PKOGRAMS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                 IYPEWRITER INPUT ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     EPOCH MINUS EPOCH DAY
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             EXECUTIVE SWITCH
ARGUMENT OF PERIFOCUS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       MAIN SEQUENCE SWITCH
CARD SUPPRESS SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        LOAD OBSERVATIONS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    EXECUTIVE SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  DAY NO. OF EPOCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     EXECUTIVE SWITCH
                                                                                                                                                                                                                                          EXECUTIVE SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        GET OBSERVATION
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       MESSAGE NUMBER
                                                                                                                                                                                                                                                                                          CLOCK ROUTINE
CLOCK ROUTINE
CLOCK ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        OBSGET BUFFER
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           TIME OF OBS.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               OMEGA SUB S
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            COR, M/4077$
GLOP.TGLOP, M/4046$
GLUP.PGLOP, M/4047$
H, M/3431$
HALF, M/3633$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 M/31464$
                                                            M/32058
M/32638
M/32668
M/32648
M/32078
M/32078
                                                                                                                                                                      M/31464$
                                                                                                                                                                                                                                                                                                                                                                                                M/40105
M/37245
M/43525
M/435
M/448
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       M/43305
N/3726$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/3351$
M/3353$
M/3556$
                                                                                                                                                                                                                                                                                                                                             M/37158
M/3373$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/4331$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/3352$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           M/4054$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             M/43515
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/40065
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/3363$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        M/3736$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        M/40563
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         M/4057$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         M/37345
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/3342$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             M/3733$
                                                                                                                                                                                        M/4011$
                                                                                                                                                                                                        M/4003$
                                                                                                                                                                                                                         M/4005$
                                                                                                                                                                                                                                          M/40603
                                                                                                                                                                                                                                                          M/4560$
                                                                                                                                                                                                                                                                                                                                                                                M/3361$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           M/40553
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/40045
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              M/4061$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/4344$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/4353$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            M/3341$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/3235$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/3300$
                                                                                                                                                                                                                                                                                            M/27$
                                                                                                                                                                                                                                                                                                            M/351
                                                                                                                                                                                                                                                                                                                             M/363
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         NXSAT,
NXTELM,
NXTELM,
NXTESW,
NXTOBN,
OALT,
OBLOC,
OBSNO,
OBSNO,
OBSSGT,
OBSGT,
                                                                                                                                                                                                                                                                                                                                                                                                 LMNTUD,
LOCRTAP,
                                                                                                                                                                                                                       NITSAT,
                                                                                                                                                                                                                                                                                                                                                                                                                                                    MANEXIT,
MANTYPE,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           NOSCHED,
                                                                                                                                                                                                                                                                                                                                              KMSZERK,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        MSw.
NOCARU.
                                                                                                                                                                                                        NITEL,
                                                                                                                                                                                                                                                                                                                                                                                                                                 LSTOBN,
                                                                                                                                                                                                                                                                                                             KLOKFB,
                                                                                                                                                                                                                                                                                                                             KLOKFI,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             NUMELM.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     MMSW,
MSGNO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            OMARK,
OMEGA,
                                                                                                                                                                                                                                                         REC,
STOP,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             OMGAS,
                                                                                                                                                                   IBLOC.
                                                                                                                                                                                                                                          OBSW,
                                                                                                                                                                                                                                                                                                                                                                                LAMBA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           NOSAT,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                ORGDA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     ORGTM,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     OSTROB
                                                                                                                                                                                                                                                                                                                                                              LADT,
                                                                                                                                                                                                                                                                                            KLOK,
                                                               HXO,
                                                                                                HYO,
                                                                                                                  HY,
HZO,
   ASGN
ASGN
ASGN
ASGN
ASGN
ASGN
ASGN
```

20

```
RASSN SWITCH
RASSN SWITCH
RASSN SWITCH
RADIUS VECTOR CUBED
RADIUS VECTOR
COEFF USED IN COMP C SUB DELTA C FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA N/N FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB YN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB YN FOR RANGE RATE OBS IN DC
EXECUTIVE PROGRAM RETRY
EXECUTIVE PROGRAM RESUME
FINALR REV.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              COMP RANGE RATE

COMP RANGE RATE

X COMP OF RANGE VECT (RHO BAR) = XI

Y COMP OF RANGE VECT (RHO BAR) = ETA

Z COMP OF RANGE VECT (RHO BAR) = ZETA

MAGNITUDE OF OBS R BAR (VECTOR DIRECTED TO OBJ)

OBS RANGE RATE
PARAMETER
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   AT EPOCH
                                                                                                                                                                                                                                                                                                                                           PHASE ANGLE COEFFICIENT
                                                                                                                                                                                                                                                                                                                                                                                                                                             PI OVER 4
PI SUUARED
P SUB N
P SUB O
START OF PROGRAM AREA
                                                                                                                   ROUTINE
ROUTINE
ROUTINE
ROUTINE
ROUTINE
                                                                                                     ROUTINE
                                                                                                                                                                                                                                        ROUT I NE
                                                                                                                                                                                                                                                         ROUT I NE
                                                                                                                                                                                                                                                                        ROUTINE
                                                                                                                                                                                                                                                                                        ROUT I NE
                                                                                                                                                                                                                                                                                                            ROUTINE
                                                                                                                                                                                                                                                                                                                                                            STATION LATITUDE
PI
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 LA PASS CODE
PERIOD AT EPOCH
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  PERIFOCAL DIS.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   CONSTANT
RADIUS VECTOR
DEG/RAD
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                INITIAL REV.
                                                                                                                                    PANT
PANT
PANT
                                                                                                                                                                                      PANT
PANT
                                                                                                                                                                                                                      PANT
                                                                                                                                                                                                                                                       PANT
                                                                                                                                                                                                                                                                        PANT
                                                                                                                    PANT
                                                                                                                                                                                                                                                                                         PAINT
                                                                                                                                                                                                                                                                                                       PART OF PANT
                                                                                                     PANT
                                                                                                                                                                                                                                        PANT
                                                                                                                                                                                                                                                                                                                                                                                             PROGRAM ID
PI OVER-360
SEMI-LATUS
CONSTANT
                                                                 PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART OF PART O
                                  CONSTANT
                                                   CONSTANT
                                                                                                                                                                                                                                                                                                                             SWI TCH
                                                                                                                                                                                                                   PANT.TPANTA, M/4016$
PANT.TSPACE, M/4020$
PANT.TSPACER, M/4022$
                                                                                                     PANT.SPACE, M/4030$
PANT.SPACER, M/4031$
                                                                                                                                                     PANT.FINISH, M/40358
PANT.ALLFIN, M/40375
                                                                                                                                                                                                     PANT. TPANT, M/40148
                                                                                                                                                                                                                                                                                        PANT.PPANT, M/4042$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/46050$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      M/3727$
M/3730$
M/3521$
M/3542$
M/3522$
                                                                                                                                                                                                                                                                                                                                           M/32218
M/33608
M/36348
M/36358
M/36358
M/36088
M/370488
M/37058
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/34018
M/324018
M/32338
M/36378
M/36618
M/33478
                                                                                                                                                                                    PANT.XFIN,M/4051$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 M/34745
M/3217$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/3436$
M/3437$
                                                                                                                                                                                                                                                                        PANT.TFIN,M/4040$
                                                                                                                                         PANT.PAGE, W/40338
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             M/3524$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/3525$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/3526$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 M/4001$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/37425
                                                                                                                                                                                                                                                                                                            PANT.PFIN,M/4044$
                                                                                                                                                                                                                                                                                                                             M/3735$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/3660$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/4000$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   M/3432$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/3433$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/34348
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/3435$
                                   M/3566$
                                                   M/35625
                                                                    PANT.PANT,M/4024$
                                                                                     PANT.PINT,M/4026$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  PROGRAM,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          RASFRST,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              RESUME,
RESID,
REVF,
REVI,
                                                                                                                                                                                                                                                                                                                             PCKFLG,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        RCUBE,
RDOT,
RDOTC,
RDOTC,
                  P3JA02,
                                                                                                                                                                                                                                                                                                                                                                                                             PIU36,
PIU36,
PIOV2,
PIOV4,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 PSCOD,
PZERO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 RHOZ,
ROBS,
RODOT,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 RHOC,
RHODT,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         RANGE,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               RDTYN,
REGO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       RADYN,
                                                                                                                                                                                                                                                                                                                                              PHANG.
                                                                                                                                                                                                                                                                                                                                                              PHIRD,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           RDOTU,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              RDTXN,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   RHOX ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         RASW,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     RHOY ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      QO,
QTR,
 ASGN
ASGN
ASGN
ASGN
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 ASGN
ASGN
ASGN
ASGN
ASGN
ASGN
ASGN
```

```
ROTATION
                                                                                                                                                                                       ANGLE OBS. IN DC
ANGLE OBS IN DC
                                                                                                                                                                SAJOARE ROOT OF THE PARAMETER
RSUBU
R*DOT
COEFF USED IN COMP C SUB DELTA A SUB YN FOR RANGE AND ANGLE OBS. IN DC
COEFF USED IN COMP C SUB DELTA A SUB YN FOR RANGE AND ANGLE OBS. IN DC
SAT. NO.
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SAT. NAME
SENSUR FILE BLOCK
ROTATION RATE OF LARTH MINUS 360 UEG IN DEG/SOLAR DAY 360.9856472 = RO
OF LARTH IN DEG/SOLAR DAY
SIN (E + OMEGA), E = ECCENTRIC ANOM, OMEGA = ARG OF PERIFOCUS
SIN NODE
SIN NODE
SIN NODE
SIN ROOT
SIN ARC OF LATITUDE
SIN THETA, THE SIVEREAL TIME
SIN THETA, THE SIVEREAL TIME
                                                                                                                                                                                                                                                                                            H
                                                      CUEFF USED IN COMP C SUB DELTA A/A FOR RANGE AND ANGLE OSS IN DC CUEFF USED IN COMP C SUB DELTA C FOR RANGE AND ANGLE OBS IN DC COEFF USED IN COMP C SUB DELTA N/N FOR RANGE AND ANGLE OBS IN DC COEFF USED IN COMP C SUB DELTA N/N FOR RANGE AND ANGLE OBS IN DC SQUARE ROOT OF SEMI MAJOR AXIS

EXECUTIVE SMITCH
TYPEOUT ROUTINE
TYPEOUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
TYPEUT ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                             EARTH AND SATELLITE
XI DOT
ETA DOT
ZETA DOT
                                                                                                                                                                                                                                                                                                                                                                                                                SOUTH)
SOUTH)
  H II II
                                                                                                                                                                                                                                                                                                                                                                                                                FROM OBS TO S
FROM OBS TO S
 DOT)
DOT)
DOT)
                                                                                                                                                                                                                                                                                                                                                                                            MU** 1/2, MU = SUM OF THE MASSES OF
 BAR
BAR
BAR
VECT (RHO B
                                                                                                                                                                                                                                                                                                                                                                                                               X COMP OF S BAR (UNIT VECTOR Y COMP OF S BAR (UNIT VECTOR Z COMP OF S BAR (UNIT VECTOR SINGLE TAB ROUTINE SENSOR NO.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          SENSOR TYPE
RMS OF RANGE AND ANGLE
RMS OF RR RESIDUALS
1/O ROUTINE
1/O ROUTINE
1/O ROUTINE
 RATE V
RATE V
RATE V
                                                                                                                                                                                                                                                                                                                                                                                                                                                                 STANDARD BRIGHTNESS
EXEC. TEMP.
SENSOR NAME
2ND WORD
X COMP OF RANGE RATE
Y COMP OF RANGE RATE
Z COMP OF RANGE RATE
RHO MAX
RPL PROGRAM LOADER
                                              TEMP
                                                                                                                                                                                                                                                                                                                                                                                   TEMP
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             M/16$
M/1200+1H$
M/12$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         M/136+1H$
                                                                                                                                                                                                                              M/32028
M/32138
M/35638
M/32148
M/41308
M/432748
                                                                                                                                                                                                                                                                                                              M/32438
M/32738
M/32748
M/32748
M/32768
M/32768
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          M/3371$
M/3475$
M/3476$
 H/34408
M/34418
M/34428
M/33748
M/258
                                             M/36628

K/35278

M/35308

M/35318

M/35328

M/35338
                                                                                                                   M/548
M/248
M/238
M/32718
M/327114
M/352728
M/3536
                                                                                                                                                                                                                                                                                                                                                                                                      M/37415
M/34475
                                                                                                                                                                                                                                                                                                                                                                                                                         M/34508
M/3451$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/3356$
M/3357$
                                                                                                                                                                                                                                                                                                                                                                                                                                               M/20$
M/3340$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                  M/3220$
M/3370$
                                                                                                                                                                                                                                                                                                                                                                         M/3444$
                                                                                                                                                                                                                                                                                                                                                                                   M/3720$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   M/3676$
                                                                                                                                                                                                                      M/3201$
                                                                                                                                                                                                                                                                                                                                                                                            M/3663$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/46$
                                                                                                                  RTECON,
RTETYE,
RTETYPE,
RTESQ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  SYSEOT,
SYSIO, '
SYSIOK,
SYSIOK,
                                                                                                                                                                                                                                                                                                                                                                                           SGRMU,
SSTROB,
SSUBX,
SSUBY,
SSUBZ,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       STOPGO,
STPER,
STYPE,
                                    RPLLOD,
RPTIM,
                                                                 RSUBA,
RSUBC,
RSUBN,
RSUBU,
                                                                                                                                                                                                                               SATNM2,
                                                                                                                                                                                                                                                 SATN,
SATOB,
SATTE,
SBLOC,
SIDRT,
 RODIX,
RODIY,
RODIZ,
ROMAX,
                                                                                                                                                                            RVDUT,
                                                                                                                                                                                                                                                                                                              SINI,
SINEO,
                                                                                                                                                                                                                                                                                                                                                                                                                                             STAB,
STAID,
STURT,
STGAR,
                                                                                                                                                                                                           SATNO,
SATNM,
                                                                                                                                                                                                                                         SATKM,
                                                                                                                                                                                                                                                                                                                                           SINOM,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                STNM2,
                                                                                                                                                                                                                                                                                                                                                               SINPH,
                                                                                                                                                                                                                                                                                                                                                                         SINTH,
                                                                                                                                                                                                                                                                                                                                                                                   SINDU,
                                                                                                                                                                                                                                                                                                                                  SINO,
                                                                                                                                                                                                                                                                                                                                                      SINU,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     STNM.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               SUM2,
                                                        RSQ.
                                                                                                                                                           RTP,
                                                                                                                                                                                       RXN,
                                                                                                           RTA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      SUM,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          SYS,
                                                                                                                                                                                                  RYN.
                                                                                                                                                                     RU,
```

```
20
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          5
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        COEFF USED IN COMP C SUB DELTA C FOR RANGE RATE OES IN DC
COEFF USED IN COMP C SUB DELTA N/N FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA LO FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE RATE OBS IN DC
COEFF USED IN COMP C SUB DELTA A/A FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A/A FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA N/N FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A/A FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A/A FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A/A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COEFF USED IN COMP C SUB DELTA A SUB XN FOR RANGE AND ANGLE OBS IN DC
COMP OF USAR (UNIT VECTOR DIRECTED TO OBJ

X COMP OF V BAR (UNIT VECTOR IN ORB PLANE PERPEN TO USAR)

Y COMP OF W BAR (UNIT VECTOR PERPENDICULAR TO ORBIT PLANE)

Y COMP OF W BAR (UNIT VECTOR PERPENDICULAR TO ORBIT PLANE)

Z COMP OF W BAR (UNIT VECTOR PERPENDICULAR TO ORBIT PLANE)

Z COMP OF W BAR (UNIT VECTOR PERPENDICULAR TO ORBIT PLANE)

Z COMP OF W BAR (UNIT VECTOR PERPENDICULAR TO ORBIT PLANE)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 z
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          2
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     SIGMA SUB 1 (USED IN DC AUTO REJ)
CONSTANT •6657
CONSTANT 3 PI OVER 2
X COMP OF R BAR (VECTOR DIRECTED TO 05J)
X COMP OF R BAR DUT
TAPE TABLE
1/O ROUTINE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
TAPE TABLE
                                                                                                                                                                                                       THETA DOT
GREENWICH SIDEREAL TIME AT
THETA GREENWICH SUB ZERO
THETA = SIDEREAL TIME
T SUB N
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    FLOATING .07436574
                                                                                                                                                                                                                                                                                                                                                                      TTY OUTPUT SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                                      LA TYPE
EXECUTIVE SWITCH
MEAN ARG. OF LAT.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 CM/EARTH RADII
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              INCLINATION
                                                                                                                                                                                                                                                                                                                                 YEAR OF TO
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   CONSTANT
                                                                                                                                                                                                                                                                                                              SWITCH
                                                                                                                                                                                                                                                                                                                                                     SUB
                                                                                                                                                                                                                                                                                                                                                                                                               2 P I
                                                                                                                                                                                         EMP
                        M/115$
M/17+1H$
M/55$
M/3266$
M/43035
N/3570$
                                                                                                                                                                                                                                                                   M/34465
M/34775
M/37235
M/32235
M/35545
                                                                                                                                                                                                                                                                                                                                                                                                               73641b

73641b

734038

734038

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018

7350018
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             7,25503
7,33035
7,33045
N,33045
N,3305
N,3305
N,3305
N,3307
N,33135
N,33135
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/37028
M/36425
M/36435
M/33315
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   M/33164
M/36675
M/36708
M/36715
                                                                                                                                                                                                                              M/3445$
M/3555$
                                                                                                                                                                                                                                                                                                                                                                        M/37225
M/43345
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                M/33155
M/3665$
                                                                                                                                                                                                           M/3664$
                                                                                                                                                                                                                                                                                            TA,
TOTOBER,
                                                                                                                       TAPCK,
TAPEWAY,
                        SYSNAME,
SYSNO,
SYSTAB,
SYSTAL,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   X1MFSQ,
X1STSG,
X2OV3,
X3PIO2,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        XKE,
XKERIM,
XKMPER,
                                                                                                                                                                                                                                                                                                                                                                        TTYT,
TTYTAP,
                                                                                                                                                                                                                                                                                                                                                                                                              TWOPI,
TYPESA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                KKELSO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          JSUBA,
USUBN,
USUBN,
USUBU,
UTIME,
                                                                                                                                                                                       TENM6,
THDOT,
                                                                                                                                                                                                                              THGR.
THGRO.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              UDOTC,
UDOTC,
UDIXN,
UDIXN,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         XINCL.
                                                                                                                                                                                                                                                                   THTA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               UZ,
VDOT,
VMAG,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      (DOT ;
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     , OUNTO
                                                                                                                                                                                                                                                                                                                                     TOY,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               UXN.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     ر×۲۰
۱۲۰
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           9
                                                                                                                                                                                                                                                                                                                                                       ,
0
```

```
SAR)
SAR)
SAR)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                   (MUS** 1/2)8(A** 3/2), A= SEMI-MAJOK AXIS, MU USUALLY = 1
X COMP OF M BAR (UNIT VECTOR IN ORB PLANE PERPENDICULAR TO N BAR)
Y COMP OF M BAR (UNIT VECTOR IN ORB PLANE PERPENDICULAR TO N BAR)
Z COMP OF M BAR (UNIT VECTOR IN ORB PLANE PERPENDICULAR TO N BAR)
3443.990 = NAUTICAL MILLS/LANTH RADII
LONG. OF ASC. NODE
NOUE SUB
NOUE SUB
NOUE SUB
NODE DOT
X COMP OF K BAR (UNIT VECT DIRECTED TOWARD ASCEN NODE) = SIN NODE
MEAN ANGULAR MOTION
Y COMP OF N BAR (UNIT VECT DIRECTED TOWARD ASCEN NODE) = COS NODE
Z COMP OF N BAR (UNIT VECT DIRECTED TOWARD ASCEN NODE) = 3
X COMP OF OBS R BAR (VECTOR DIRECTED TOWARD ASCEN NODE) = 3
X OVER COS THETA
                                                                                           03J)
06J)
06J)
                                                                                           01
02
10
10
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      ZENÍTH)
ZENÍTH)
ZENÍTH)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     Z COMP OF R BAR (VECTOR JIRECTED TO ObJ)
Z COMP OF BAR DOT
FLOATING POINT ZERO
Z COMP OF ObS R BAR (VECTOR DIRECTED TO ObJ)
CURRENT PRUGRAM SWITCH
X COMP OF Z BAR (UNIT XECTOR FROM OBS TO ZENITH
Y COMP OF Z BAR (UNIT VECTOR FROM OBS TO ZENITH
CURRENT YEAR
                                                                                                                                                                                                   TEMP

X CUMP OF COMP L DAR, UNIT VECT FROM OBS TO OB. MEAN LONGITUDE

Y COMP OF COMP L DAR, UNIT VECT FROM OBS TO OB. ELOATING -.6667

FLOATING -.1.5
FLOATING -1.3333
FLOATING -6.75
USED IN COMPUTING A
                                                                                           06S
06S
06S
(NAUTICAL MILES/HCUR) (EARTH RADII/KEMIN)
SAME AS LARBA
1+(1=**2)**1/2, E = ECCENTRICITY
TEMP
MEAN LONG AT EPOCH
X COMP OF L BAR SUB O (UUS UNIT VECT FROM OBS
Y COMP OF L BAR SUB O (OUS UNIT VECT FROM OBS
OBS UNIT VLCT FROM OBS TO OBJ-WRT HORIZON
OBS UNIT VLCT FROM OBS TO OBJ-WRT HORIZON
OBS UNIT VLCT FROM OBS TO OBJ-WRT HORIZON
OBS UNIT VLCT FROM OBS TO OBJ-WRT HORIZON
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          R BAR (VECTOR DIRECTED TO OBJ)
R BAR DOT
OBS R BAR (VECTOR DIRECTED TO OBJ)
SEQUENCE SWITCH
                                                                                                                                                                                                                                                                                                                                                                                                                FLUATING -1
TEMP
MIN/DAY
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          Y COMP OF F
Y COMP OF F
Y COMP OF C
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                A/36746

R/32276

R/32308

A/32318

R/33268

M/33268

M/33268

M/33258
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           M/4071$
M/3332$
M/3335$
      X/36/22
X/36/22
X/33/20
X/33/20
X/34/20
X/34/20
X/34/20
X/34/20
X/34/20
X/34/20
                                                                                                                                                                   M/34565
M/34575
                                                                                                                                                                                                                        M/34/609
M/34/609
M/34/629
M/36/629
M/36/629
M/36/639
M/36/639
M/36/39
M/33/29
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       M/34638
M/33648
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     M/4347$
M/4100$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       M/33338
M/33368
M/36508
M/34658
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               M/4346$
M/3466$
M/3467$
M/3470$
M/4350$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    M/34645
                                                                                                                                                                                                        M/3600$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            ZSELECT,
ZSELECT,
ZSUBX,
ZSUBY,
ZSUBZ,
ZYEAR,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                XNY,
XNY,
XNZ,
XOBS,
XUVCT,
XWRAPUP,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   YSELECT,
YWRAP10,
      XKNOTS,
XLGM.
XLGR.
XLGR.
XLO.
XLSUBX,
XLSUBX,
XLSUBX,
XLSUBY,
XLSUBZ,
XLSUBZ,
XLSUBZ,
XLSUBZ,
XLSUBZ,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
XLSUZH,
                                                                                                                                                                                                                                              XL,
XLY,
XLZ,
XMZU3,
XM302,
XM403,
XM2704,
                                                                                                                                                                                                                                                                                                                                                                                                                                    XMN,
XMNPDA,
XMUA32,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             XMZ,
XNMPEK,
XNODE,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       XNODEO,
XNUDOT,
                                                                                                                                                                                                                                                                                                                                                                                                                   XMFL01,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          ZDOT,
ZERO,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 YDOT,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    YOBS,
                                                                                                                                                                                                                                                                                                                                                                                              XMA,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           XMX,
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              ×MX.
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        XNO.
```

. _ _ _ __

IOPS AND PROC

ERROR PROCEDURES AND COMMENTS

Irrecoverable Errors:

1) IRRECOV ERROR

2) PROGRAM ERR PROC

(See PROC ERRORS Table)

3) PROGRAM ERR IOPS

(See IOPS ERRORS Table)

Irrecoverable errors comments are accompanied by a typeout of the contents of the A register and Q register:

A REG =

Q REG =

The program will then jump to location 3.*

Recoverable Errors:

1) PARSPROC ERR Sprocket or parity error

2) S1, S2 ERR Start or end block sentinal error

3) RING TAPEXX No write ring on unit XX

4) LOCAL TAPEXX Tape unit XX not available

5) NO TAPE XX Rewind issued - tape not available

Recoverable errors are accompanied by the STOP-GO option, wherein the operator may retry the job by typing GO or may type STOP to effect a jump to location 3.*

* Location 3 will generally cause the typeout of the Flexo comment: SUBROUTINE ERROR EXIT FROM OCTAL XXXXX, LOAD COMPACT INTO UPPER CORE AND TAKE DUMP.

Following the message, a stop or go loop controls the console such that if STOP is typed the message will be repeated. Typing GO returns control to the executive program terminating the job. If possible, a dump should always be taken.

IOPS ERRORS

A REG	Q REG	MEANING
1/1	Unit TI5 or T23	Attempt to use a tape which has not been defined in the IOUNITS statement
2/1	Unit Tl5 or T23	Attempt to read a tape described in the IOUNITS statement as "Write Only".
3/I	Unit TI5 or T23	Attempt to write on a tape described in the IOUNITS as "Read Only".
4/1		Attempt to read from a binary tape more words than there are in the record.
5/1		The checksum of the blocks after reading does not equal the checksum written with the block. This is applicable to binary tape only.
6/1		Attempt to store, for printing, more than 120 printable characters for a given line.
7/1		Attempt to read from a binary tape which is not in the correct format.
8/1		The program was run even though an error occurred at compilation time.
9/I		Probably machine error; or the program has destroyed some 10PS coding (2GNC).
10/1		More characters are requested from a card than were described in the record size parameter in the IOUNITS statement.

11/1		Same as 9/1. (BIWTR)
12/1	Last character processed T5	Illegal character or illegal exponent field in floating to floating (E) input conversation.
13/1	Last character processed T5	Illegal character or illegal exponent field in fixed decimal to floating (F) input conversion.
14/1	Last character processed T5	Illegal character in fixed decimal to integer (D) input conversion.
15/1	Last character processed T5	Illegal character or exponent field in integer to integer (I) input conversion.
16/1		Rewind order to a unit defined as paper tape.

PROC ERRORS

A REG=	Q REG =	Meaning
Zeros	Location of macro-instruc- tion in left address	List full
Location of macro-instruc-tion being checked in left address; 1/1T47 (D/1)	Normal exit of check macro-instruction in left address	Not in list
Location of macro-instruction being checked in left address; 1/1T46 (D/2)	Normal exit of check macro-instruction in left address	Checking non-magnetic tape order with magnetic tape check macro-instruction
Location of macro-instruction being checked in left address; 1/1T45 (D/4)	Normal exit of check macro-instruction in left address	Checking too much (B= NBP of original order.)
Location of macro-instruction being checked in left address; 1/1T43 (D/16)	Normal exit of check macro-instruction in left address	Checking out of sequence
Unit #T23; 1/1T41 (D/64)	Location of macro-instruc- tion being checked in left address	Write or read only

SPSJOB OPTION TABLE

```
PSR:
  SPSJOB
                       PSR (I) (O)
        (I): Col. 17
                  0 = Parameter Cards
       (O): Col. 18
                  0 = Print (D.S. 1) and punch paper tape (D.S.4)
                   1 = Print only (D.S. 1)
RESPLT:
  SPSJOB
                       RESPLT (I) (O)
        (I): Col.17
                  0 = Observation Cards
                  1 = Observation and Element Cards
                  2 = Observation and Element Number Cards
                  3 = Observation and Sensor Cards
                  4 = Observation, Element, and Sensor Cards
                  5 = Observation, Element Number, and Sensor Cards
        (O): Col. 18
                  0 = Print (D.S.I) and punch cards (D.S.2)
```

SYMBOLKEY: 1 = Input, O = Output, S = Special, X = Scratch, (N) = Write Ring, M = No Write Ring, @ = 11,8,2 Punch * = TELTYP Program May Follow, [= Repeat if Necessary, () = Optional

PPOGRAM		INPUT		INTERIM	<u></u>	OUTPUT	INDEX
Nome	Tape Setup	Input Deck (SPS)	Special Tapes	Tape Usage	Form	Contents	
ISUM	©⊕ ⊕⊕ 0 0	1) JOB 2) RUN ISUMB2, DATA 3) (ALL) Control Card 4) (BOX) Control Card 5) (NNN) (Sat. No., Used in Absence of ALL Card) 6) END Control Card 7) ENDDATA 8) ENDOFJOB @	€S = SEAI	①X = Scratch Used for Data Input	(i) O = Print (DS 1)	Contents of Information File with Optional Box Score	Description: Section 1 Program 14 Input/Output: Section 5 Program 14
Γοςνές	\$ - \$ 0 \$ 0 \$ 0 \$ 0 \$ 0 \$ 0 \$ 0 \$ 0 \$ 0 \$ 0	1) JOB 2) RUN LOCVECB2, DATA 3) Request Card(s) (500 max.) 4) 7 Punch in Col.8 5) Element Set(s) (500 max.) 6) Blank Card 7) ENDDATA 8) ENDOFJOB@	None	©X= Scratch Used For Data Input	(1) O= Print (DS 1) (1) O = Punch 5- level Paper Tape (DS 4)	Vector Coordinates for Lockheed	Description: Section 1 Program 4 Input/Output: Section 5 Program 4
MAKETAPE	× - 8-6-6-6-6-6-6-6-6-6-6-6-6-6-6-6-6-6-6	1) JOB 2) RUN MAKETAPE, DATA 3) (TELEFORM) Control Card 4) Cards to be Converted 5) FINDATA Control Card 6) ENDDATA 7) ENDOFJOB @	None	(0)X = Scratch Used for Data Input	(D) 0 = Print (DS 1)	Alphanumeric Card Data Transferred to Tape, with Sentinals Required by TELTYP	Description Section 1 Program 8 Input/Output: Section 5 Program 8

SYMBOL KEY: 1= Input, 0= Output, 5 = Special, X = Scratch, (N)=Write Ring, (M) = No Write Ring, (0) = 11,8,2 Punch
* = TELTYP Program May Follow, [= Repeat if Necessary, () = Optional

INDEX		Description: Section 1 Program 11 Input/Output: Section 1 Program 11	Description: Section 1 Program 10 Input/Output: Section 5 Program 10	Description: Section 1 Program 7 Input/Output: Section 5 Program 7
OUTPUT	Contents	Search Point Data for Satellite Sighting	Search Ephemeris of a Point in Space for a given Station	Satellite Situation Report from Nodal Elements
o I	Form	(i) 0 = Print (DS 1)	(i) 0 = Print (DS 1)	(i) 0 = Print (DS 1)
INTERIM	Tape Usage	© X = Scratch Used for Data Input	© X = Scratch Used for Data Input	® X = Scratch Used for Data Input
	Special Tapes	None	None	None
INPUT	Input Deck (SPS)	1) JOB 2) RUN ORPSB2, DATA 3) Element Set 4) Station Card 5) Request Card 6) Blank Card 7) ENDDATA 8) ENDOFJOB @	1) JOB 2) RUN POSEB2, DATA 3) Request Card 4) Observation Card 5) Station Card (s) 6) Option Card 7) ENDDATA 8) ENDOFJOB @	1) JOB 2) RUN PREPINTB, DATA 3) Request Cards (500 max.) 4) 2 Punch in Col. 7 5) Time Cards 6) 7 Punch in Col. 8 7) Element Sets (500 max.) 8) Blank Card 9) ENDDATA 10) ENDOFJOB @
	Tape Setup	©-8@ - S - S S - S	© × 1.5 ⊕ 0 ⊆ 0 ∈ 0 ∈ 0 ∈ 0 ∈ 0 ∈ 0 ∈ 0 ∈ 0 ∈ 0 ∈	× 0 - 1 S - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0
PROGRAM	Name	ORPS	POSE*	PREPIL'I*

SYMBOL KEY: 1 = Input, O = Oytput, S = Special, X ± Scratch, (N) = Write Ring, M = No Write Ring, @ =11,8,2 Punch
* = TELTYP Program May Follow, [= Repeat if Necessary, () = Optional

IN DEX		Description: Section 1 Program 1 Input/Output: Section 5 Program 1	Description: Section 1 Program 2 Input/Output: Section 5 Program 2	Description: Section 1 Program 6 Input/Output: Section 5 Program 6
OUTPUT	Contents	Situation Reports (Position or Satellite), for all Satellites at a given time	Residuals. Observations Reduced to Last Nodal Crossing	Residuals of At and Vector Magnitude Versus the Revolution. Punched Cards to be Used on EAI Data Plotter
<u></u>	Form	(1) 0 = Print (DS1) (11 0 = Punch 5-level Paper Tape (DS4)	(j) 0 = Print (DS 1)	(1) O = Print (DS 1) (1) O = Punch Cards (DS 2)
INTERIM	Tape Usage	None	© X = Scratch Used for Dato Input ® X = Scratch Used to Store Untagged Obs.	Zone
	Special Tapes	⊕s = seal	Às = . Station Tape (Optional)	⊕S = SEAI
INPUT	Input Deck (SPS)	1) JOB 2) REM 3) SPSJOB PSR (I) (O) 4) Parameter Card (Time Request) 5) (Parameter Card(s)) 6) ENDACASE® 7) ENDOFJOB®	1) JOB 2) RUN REDUCTB2, DATA 3) Option Switch Card 4) 7 Punch in Col.8 5) Element Sets (250 max.) 6) 9 Punch in Col.8 7) (Station Cards (750 max.) 8) 8 Punch in Col.8, Tolerance Limit in Col.7 9) Observation Cards (no max.) 10) Blank Card 11) 9 Punch in Col.79 12) ENDDATA 13) ENDOFJOB @	1) JOB 2) REM 3) SPSJOB RESPLT (1)(O) 4) (Element Cards, if Input Options 1,2,4, or 5) 5) (Sensor Cards, if Input Options 3,4, or 5) 6) Observation Cards 7) ENDACASE® 8) ENDOFJOB®
	Tape Setup	1.S (E) (E) (E) (S) (S) (S) (S) (S) (S) (S) (S) (S) (S	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	-@@_ - 0 - 0 - 0
PROGRAM	Name	PSR	REDUCT*	RESPLT

SYMBOL KEY: 1 = Input, O = Output, S = Special, X = Scratch, (N) = Write Ring, \(\hat{\text{N}} = \text{No Write Ring}, \(\hat{\text{@}} = 11,8,2 \text{ Punch} \)

* = TELTYP Program May Follow, \(\begin{array}{cccc} \end{array} \) Repeat if Necessary, () = Optional

INDEX		Description: Section 1 Program 9 Program 9 Program 9
OUTPUT	Contents	Predicted Look—Angles for Satellite at Specified Times, for a given Station
0	Form	(DS 1) (DS 1) (OS 2) (DS 2)
INTERIM	Tape Usage	(a) x = Scratch Used for Data Input (a) x = Scratch Used for Used
	Special Tapes	≜S = Ephemeris Data Tape (Optional)
INPUT	Input Deck (SPS)	1) JOB 2) RUN XYZLARB2, DATA 3) Station Card 4) Request Card 5) (Identification Card) 6) (Ephemeris Cards) 7) (Blank Card) 8) (Station Card with Minus Station No. if more than One Sat. Processed) 10) (Station Card with Card) 11) Blank Card 12) ENDOFJOB ©
	Tape Setup	× -@€€€€€€€
PROGRAM	Name	XYZLAR

SYMBOL KEY: 1 = Input, O = Output, S = Special, X = Scratch, (N) = Write Ring, A = No Write Ring, (i) = 11,8,2 Punch
* = TELTYP Program May Follow, [= Repeat if Necessary, () = Optional

NDEX		Description: Section 1 Program 3 Input/Output Section 5 Program 3	Description: Section 1 Program 13 Input/Output: Section 5 Program 13	Description: Section 1 Program 15 Input/Output: Section 5 Program 15
OUTPUT	Contents	Orbit Information Computed from Radar Observations. Element Set on Request	Contents of Sensor File	Teletype Conversion of Contents of (1) 1
ŏ	Form	(1) 0 = Print (DS 1) ((1) 0 = Punch Cards (DS 2))	(1) O = Print (DS 1)	(1) O = Punch 5-level Paper Tape (DS 4)
INTERIM	Tape Usage	(1) X = Scratch Used for Data Input (1) X = Scratch Used for Punch Card Storage	None	(B) X = Scratch Storage for Messages Before Transfer to (1) O
	Special Tapes	A None	(A) S = SEAI	(1) 1 = Output Tape from Other Programs
INPUT	ck (SPS)	OPTION II 1) JOB 2) RUN ROCB2, DATA 3) Request Card 4) Coordinates Card 5) Velocity Card 6) 9 Punch in Col.79 7) ENDDATA 8) ENDOFJOB®		
	Input Deck (SPS)	OPTION I 1) JOB 2) RUN ROCB2, DATA 3) Request Card 4) Station Card 5) Observation Cards 6) 9 Punch in Col. 79 7) ENDDATA 8) ENDOFJOB®	1) JOB 2) RUN SSUMB2 3) ENDOFJOB®	1) JOB 2) RUN TELTYP 3) ENDOFJOB@
	Tape Setup	⊜ — ⊕ ⊜© • ~ S × o	-@@ <u></u>	-@⊕⊜ S - S × O
PROGRAM	Name	. ROC*	SSUM	TELTYP

SYMBOL KEY: 1= Input, O= Output, S= Special, X = Scratch, (N)=Write Ring, (M) = No Write Ring, (0) = 11,8,2 Punch
*= TELTYP Program May Follow, [= Repeat if Necessary, () = Optional

SYSTEM OPERATING MODES

The definition of terms as used in the descriptions included in the Input-Output section under Input Deck are as follows:

A. Schedule Tape Mode

This term implies that the program is completely SPS system oriented. The assign deck listed in the Assign Table has been used to bind the program to the system. An SPSJOB card must be used to call the program from the system library tape. All elements, observations, sensors, as well as the parameter cards are brought in by the executive routine after consulting the input-output options contained on the SPSJOB card and an internal Job Table. Only system supplied routines are used in the execution of input-output requirements. Upon completion the program will exit to the system location called EXEND. Toggle 24 must be on and 1-23 off to run under this mode.

B. Manual Schedule Tape Mode


The programs of this type require a RUN card to call the program from the system library tape. If data follows, it will be moved to logical tape zero (0) by the executive program. The program will read data from this tape.

PROC and IOPS, which are supplied at compilation time by the ALTAC compiler, are, with few exceptions, the input-output routines used. These input-output routines have been modified and are interruptable by the real-time devices available. Variable formatting of input-output requests, as used in FORTRAN and ALTAC, as well as Macro capabilities, have been maintained as a result of the modifications made.

The system assign deck is not used and the program contains the minimum amount of information required to bind it to the system. Upon completion of the program a return is made to the location called MANEXIT.

Toggle 24 must be on and 1-23 off to run under this mode.

SCHEDULE TAPE FORMAT

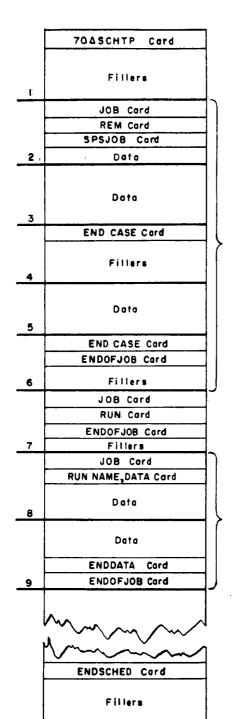

Each new job deck starts at the beginning of a block, to simplify interrupt.

Blocks 2-6 show the layout of an SPSJOB run in Schedule Tape Mode.

Block 7 shows a job run under the Manual Schedule Tape Mode, without data.

Blocks 8-9 show a job run under the Manual Schedule Tape Mode, with data.

Fig. 5.0

PSR

(Postion Situation Report (SITRPT))

INPUT DECK: Schedule Tape Mode

SPSJOB card required with the following options available:

- a) Input options (col. 17)
 - 0 = parameter cards
- b) Output option (col. 18)
 - 0 = teletype output required
 - 1 = inhibit teletype output

INPUT DATA:

- 1) SEAI tape
- 2) First parameter card is a request card (P in col. 80). See layout.
- 3) Up to eleven parameter cards (P in col. 80) which will be treated as comment cards for Part I of Satellite Situation Report.

OUTPUT:

Logical tape 11 contains:

- 1) Position Situation Report if option zero requested.
- 2) Satellite Situation Report if option one requested.
- 3) Both if option two requested.
- 4) Teletype output if indicated on SPSJOB card.

/	/																																																													-														(
	ŀ	2		3	4			5		I	•	;	I	Ι		7				1) s	I	_					_	_	_												_							_							_	_			_		_								_				Ī	ō	_
	0	0	0 0	0	0	Q	ð	0 1	oli	Å	0	0	à	6	0	0	0	ď	1	ď	0	1	Ź	Ó	9	1	7	þ	ý	b	ý	Ą	b	Á	Á	Z	Z	ď	6,	ý	Ý	ó	ď	7	7	7	7	a i	7	Λį	Ŋ	Ŋ	Ú	2	2	Z	χ	V	7	7	Z	Ø,	ď	1	7	9	2	V	λĺ	7	7	7	4	0	_	_
			3 4 1 1			١.	N			v				A.				١.	١.	v		٠,	٠,	` '	A A	1		y	7								4			X X	١,		`	١.	`	١.	١.	`	/ ()	1	1/3	((5) X	(e)	k	4			10	St.	X		Y)	A,	4	1/ 6y	y	y	K)	() ()	, Y	Ý	1	**		
	2	2	2 2	2	2	3		<i>z</i> :	2 4	2	2	2	2	2	2	2	2	8	8/	શે	2 2	2 2		\2 2	\ <u>}</u>	$\langle \rangle$	3	\ \	ş	Ş	\ \	ă /	X	Z	'y	\ <u>}</u>	\x\	'y	'y	Þ,	Y,	3 /	8	8	2)	X				1/2	1	13	8	8	8/	8/2 8/2		1	B	8	Å,	δ,	\$ /	X	λ	X						$\langle \rangle$	2		
	3	3	3 3	3	3	3	à	3 :	3)3	3	3	1	3	3	3	3	'n	ž/		3 3	1	Ŋ	3	13	1	Z	Z	٤/	3	3	/ 3	/3	Z	3	3	3	à	B	3	Z	Z	3	3/	3/	3/	3/	3/3	1/2 //	/3	/3	()	(3	\ <u>}</u>	\ <u>3</u>	3	λ	/	B	3	3	3	3	Z)	ď	'n,	Z	3				1	1	3		
	4	4	4 4	4	4	X	X	4 4	Ŕ	14	4	4	A	4	4	4	4	X	X)	1	14	h	//	/	/	\	þ	ķ	Ý	Ý	X	X	X	X	\	À	Y,	Y,	Y	À	Ý,	,	1	þ						V	V	V	Y	Y	X	Y)				X	X	X	Y	ď	X	X	X	1	1	1	N	V	V			
	5	5	5 5	5	5	é	F	5 :	5	1 5	5	5	6	5	5	5	5	þ	Ę/	1	5 5		\$	þ	6	1	Þ	5	5	É,	٥	\ <u>\$</u>	ş	5	5	5	é	Ź	7	3	7	٦))	3/	\$ \	5/	6 1			()	1		6	3	5	5 /5	1	1	É	É	Ę	Ę	Ź	Ź	É	٤,	ξÝ	<i>\$\</i>	$\langle \cdot \rangle$			1)	5		
	6	6	6	6	6	þ	6	6 (6	6	6	6	6	6	6	6	6	à	À,	6	6	Ġ	6	8	þ	B	è	Þ	É	É	É	É	E,	B	þ	à	ø,	6	é	é	é	é	6		()	6	5	K (V	6	E	1	4	É	6	Ŋ	1	6	þ	Þ,	È,	Þ,	Þ,	Š,	6	é,	6/	Ŋ	1				6		
	7	7	7	7	7	X	X	7 :	1	V	1	7	1	7	7	7	7	Y)	X/	V	,	1	Þ	ý	y	A	X	X	,	X	ł,	þ	ş	y	y	A	X	X,	X	X	y	Y,	λ	λ	/	$\langle \cdot \rangle$	$\langle \cdot \rangle$	$\langle \cdot \rangle$	V	$\langle \cdot \rangle$	$\langle \rangle$	$\langle \rangle$	þ	þ	ż	Ŋ,		A	X	X	X	X	X	X	X	X	X	Y)					4	,		
	8	8	8 8	8	8	8	b	8 1	9 Y	8/	8 8	8	Q	8	8	8	8	8	\$	8	8	ķ	P	/E	8	1	8	è	Y	Y	Y	¥	B	B	à	à	8	8	B	þ	ş	ď	٤	X)	Ŋ	J.			/	V	V	4	1	B	A			N	1	þ	ø	e)	Ì	ď,	S)	ļ	4		6	/	/	1	V	8		
			9 9																					٩	9	9	3	Ž	٦	٨	٦	Ì	ş	ş	ð	Ž	ď	7	کر	ď		ď	9	7	/	/	/	/	/		6	6	9	ş	ģ	9	/	7	B	٤	کو	3	ġ,	ð,	ž	Ž,	Ż	$\langle \rangle$	7		•		A			
			-1-			à	oki	EY.	30) A (11.	Ľ.	<u>''</u>		:4	۳,	,,,,	۲14	24.	-	. 72		_9		<u></u>	Ϋ́	¥	<u></u>	_	_	_	_	_	_	<u> </u>	<u>'</u>	¥.	<u> </u>	7	1	-	-			-2	-		_	• •	•	*	ح		=	ry	•	44	40	_	V '	7		<u> </u>	<u>.</u>	<u> </u>	4.7	•	. /	<u>, //</u>		17		_	_

Field	Cols.	
1	1	Output Option
		 0 Position situation Report 1 Satellite Situation Report 2 Both Reports
2	2-3	Hour at Which Report Supplies Position
3	4-5	Minutes at Which Report Supplies Position
4	6	Z Punch
5	9-10	Day of Month at Which Report Supplies Position
6	12-14	First Three Letters of Month
7	16-19	First Three Letters of Month
8	23	Satellite Situation Report Output Code:
		Blank or 0 Suppress Print of Debris
		l Print All Satellites
9	24	Position Situation Report Output Code:
		Blank or 0 Perigee and Apogee in statute miles.
		1 Perigee and Apogee in Kilometers
10	80	P Punch

Request Card

PSR

NON-CLASSIFIED

ELEM LAT LONG W INCL PERIOD APOGEE PERIOEE REV No	THE FOLLOWING INFORMATION COMPUTED FOR 14002 OF 1002 100 DEE	THE FOLLDWING IMPORMATING COMPUTED FOR 14302 DE OCT 1402 246 - 535 136 137.00 1056 147.8 8 106.1 1940 6.75.549 120.8 8 10.00 8 10.00 10.0	THE FOLLOWING IMPROMATING COMPUTED FOR 1430Z D2 OCT 1002 LAT LONG w 130L, PREID AFORE PRINCE REY ISON N 80 N 19 N 19 N 19 N 10 N 10 N 10 N 10 N 1							P 0 8	IS NO	Æ	-				PAGE	++
ELFA I LONG W 1002. FERTED AFORE PETIFIE RY I SIN N R SIN N L SUN N ECC CLASS 100 E	ELEM INTO ONE WINDLY FERTON APOSE PETITIEE REY ISLA N RS NIB N L SIB N L SIB N CC CLASS 100 C	ELEM LAT LONG WINCE FIRE RETAILS REV 1 SIGN N BY 18 N L 5 NB N CC CLAS NB C	ELF IAT LONG M TYOL MERID AND PER PRINCE REFUE REV 15UB N SUB N E SUB					Es.	OLLOWING	INFOR	z	ED F	143	2 OCT 1	962			
1.24	246 - 33	246 - 33	1136	v.	F O	<u> </u>	LAT	N. G.	2 2	ERIO	F O X	ERIGE K M	A N N O	UB A ⊀ S	A SUB	80	Ü	S
150 23 26 7 34.24 1341 13945.0 551.1 1510 275.59 1170.1 19.5 1.1 1510 275.59 114.1 1	1103 23 267 36.24 13411 3945.0 5619.1 1310.2 275.558 179.1 36.1 1510.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 140.1 150.2 275.558 14	175 24 326 35.87 114.1 3845.0 652.9 1784 275.592 1794 18.1 35.1 114.1 119.1 11	113	-	4	24	.33	136		105.6		•	96	75,5	~		∞	
135	115	135	115			10	23	267		134,1	'n	•	784	75.5		ö	Φ.	
113	1136 -31 166 32.91 120.7 36.22.7 55.01 14112 275.551 148.1 56.0. 148 1120 -31 16.0 50.0 371.10 50.0 575.571 1418.1 56.0 51.0 10112 1065.0 55.5 12046 275.551 148.1	13.6 -3.1 166 32.91 20.7 36.22.7 55.01 14112 275.551 148.1 56.0.1 1411 20.0 141.1 10.0 14.2 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10	13.6 -3.1 16.6 32.9 1.29.7 36.22.7 55.0 1.4112 275.531 1148.1 56.0 1.18 12.4 -3.1 16.6 32.9 1.29.7 36.22.7 55.0 1.4112 275.531 1148.1 56.0 1.18 12.5 -3.6 1.0 10.1 0.10.2 10.5 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2 1.2		Ħ	47	4.	329		125,5	<u>.</u>	•	518	75.5		÷	ø	
111	111	1119 33 170 54 27 129 9 2711.6 568 1283 1283 275,552 1148 871 1148 133 33 33 33 33 33 34 45 575,552 1299 3711.6 568 1283 3 3 3 4 5 50 30 1012 1075,6 5 5124 5 575,552 1973 2 2973 7 103 117 117 117 117 117 117 117 117 117 11	111		45	P	400	166		129,7	~	٠	#	75.5	÷	÷	Œ	
122	122 - 34	122 - 34	123		40	11	• 31	170		137,8	ň	٠	243	72.5	:	ŗ	0	
133 3 170 50.40 111, 2 10/5, 0 553, 7 15445 7/5, 556 287, 3 283, 7 .03 110 1	133 3 10 50.40 101.0 1075.0 553.1 15445 775.556 287.3 3 283.7 103 103 1N HELIOGENERIC ORBET 1055.6 545.6 15446 775.576 287.3 102.7 103 113 28 46 46 57 99.2 72.4 69.5 13244 775.575 552.5 162.7 103 114 2 31 46 46 77 99.2 72.4 69.5 13244 775.575 152.5 162.7 103 115 314 64.9 89.9 10.1 10.2 10.2 13.0 10.2 13.0 10.2 13.0 10.2 13.0 10.2 13.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0	113 3 31 10 57, 20 101, 2 10/5, 6 575, 556 287, 3 283, 7 103 113 13 1N FELLOGERIPE ORBIT 105, 6 595, 1540 775, 578 275, 598 275, 598 102, 5 103, 113, 2 103	133 3.8 10 56.30 101.2 10/5.6 545.4 15445 275.556 287.3 283.7 103 110. 31		00	42	434	119		129,9	:	•	230	75.5	۰	÷	€D	
133 33 170 50.0 101,0 1003,6 545,5 1546 75,78 271,9 307,03 110 23 1 170 50.1 101,0 1003,6 545,5 1546 75,78 271,9 307,03 110 23 1 14 FE TOPEN REC 101,0 1003,6 545,5 1528 275,78 271,9 307,03 110 23 147 50.1 101,0 1003,0 101,0 1003,0	133 33 11 70 50 101, 0 1055, 6 595, 15469 75, 78 271, 9 307, 103 110 2 3 1 170 50, 9 12, 9	133 33 110 65 70 70 10 10 5 5 6 5 6 5 10 10 10 10 10 10 10 10 10 10 10 10 10	133 33 110 67.6° 110.0 1063.6 545.5 15468 75.578 271.9 707003 110 13 13 14 66.9 99.2 74.2 669.5 13284 75.575 821.9 102.2 100.2 110 13 13 14 66.9 99.2 742.4 681.0 1328 275.596 50.5 102.2 102.2 110 13 13 14 66.9 99.2 74.2 669.5 136.9 275.596 50.5 152.0 102.2 110 14.0 14.0 14.0 14.0 14.0 14.0 14.0 1		22	42	• 48	58		101,2	'n	٠	24	75.5	:	83.	3	
103 13 14	1103 13 14	113 13 14	113 13 14		2	£.	23	170		101,0	ς.	•	546	ıč.	_:	07,	3	
113 13 6 46.37 99.2 747.2 699.6 13284 4.75.574 57.5 57.5	110 2 3 147 48 37 99; 2 747; 2 689; 3 1284 25; 573 54; 54, 5102, 5 0.00 110 48 3 147 48 37 99; 2 747; 2 689; 2 125; 57 2 25; 57 2 102, 5 0.00 110 40 531 64,99 92; 4 64,0 134,0 12379 25; 55 25; 5 0.00 110 10 10 10 10 10 10 10 10 10 10 10 10	110 2 3 147 48 37 99 2 777,2 689,5 13284 275,973 54,5 102,5 100 110 123 48 37 99,2 777,2 689,5 13284 275,973 54,5 100 125,6 100 123,6 40 134,9 92,4 64,10 136,6 275,5 10 275,5	110 2 3 47 48 37 99 2 777,2 689,5 1284 25575 59 54 1672 100 100 110 2 3 47 8 37 99 2 4 6 4 10 100 100 100 100 100 100 100 100 10		27			NHELI	CENTR	: ORBIT								
110	113 +88	113	113		28	40	13			99,2	47.	69	328	75,57	÷	62,	0	
113 -46	112 - 18	112 -18	112 -16		5	40	23	147		99,2	52.	16	327	75.59	59.	67.	0	
112	1126 **62 133 64 94 89 9 300; 240,4 1500 273,555 152; 9 57,5 6 101 112 314 64 99 92,4 902.6 283; 13440 275,990 235,3 350,2 101 113 314 64 9 92,4 101,6 1052,3 643,5 11792 275,565 140,8 72,3 103 114 2 314 10,9 101,6 1052,3 643,5 11792 275,565 140,8 72,3 103 115 27 6 66,09 101,6 1052,3 642,9 1180,2 11	126 +62 131 64.99 10.0 (2014 13600 277.555 212.9 57.5 100 10.0 (2015 13.0 (20	126		3	*1	•	28		4.0	24.	54.	367	75,55	20.	51.	N	
112 40 331 64.99 P2.4 902.6 281.2 13440 275.99 255.3 350.2 10.1 11.2 1.0 10.3 13.4 94.4 99.5 483.3 13347 275.59 140.8 72.3 10.3 10.3 10.3 10.3 10.4 94.4 94.5 10.5 10.5 10.3 13.4 10.5 10.5 10.5 10.5 10.5 10.5 10.5 10.5	112	112 -18	110 40 331 64.9 924 92.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0 1		7	12	-62	434		66	00	40.	360	77.55	52.	57.	0	
POSITION UNDERRAIN POS P	## POSITION UNCERTAIN ## 693.3 13147 275.545 153.5 50.0 ## 6 294 66.09 101.6 1052.3 613.5 11792 275.562 140.8 723 003 ## 6 294 66.09 101.6 1052.3 613.5 11792 275.595 127.0 79.3 103 ## 6 294 66.09 101.6 1052.3 613.5 11792 275.595 127.0 79.3 103 ## 6 240 47.20 116.1 1928.1 4612.8 1482.8 575.595 127.0 79.3 103 ## 2 240 47.20 116.1 1928.1 1482.8 563.6 275.595 127.0 79.2 103 ## 2 240 47.20 116.1 1928.1 1482.8 563.6 275.595 127.0 79.2 103 ## 2 240 47.20 116.1 1928.1 1482.8 563.6 275.595 127.0 77.0 103 ## 2 208 47.25 118.1 1482.7 153.7 951.2 275.595 127.0 12.0 222.0 103 ## 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	## POSITION UNCERTAIN ## POSITION UNCERTAIN	## POSITION UNCERFAIN ## C 294 66 c99 101:6 11923 6133 11192 275:545 153:5 50 ## C 294 66 c99 101:6 1192:3 6133 11192 275:559 140:1 79:3 103 ## C 294 66 c99 101:6 1192:3 613:3 1182 ## C 294 66 c99 101:6 1192:3 613:3 1182 ## C 294 66 c99 101:6 1192:3 613:3 1182 ## C 294 66 c99 101:6 1192:3 613:3 1182 ## C 294 66 c99 101:6 1192:3 613:3 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 294 67 c91 116:1 1182 ## C 295 69 c92 ## C 295 69 c93 106:1 1182 ## C 295 69 c93		4		0.4	334		92.4	02.	8	344	75.50	35.		٠.	
112 118 113 33.44 944 4945 483.3 13347 275.54 155.5 100.0 97.9 100	112 118 113 33.04 944 499.5 483.3 13447 275.545 155.5 160.8 95.3 95.3 95.8 96.6 9 101.6 1025.6 612.5 11792 275.562 140.8 79.3 95.8 96.6 9 101.6 1025.3 612.9 11792 275.562 140.8 79.3 95.8 96.6 9 101.6 1025.3 612.9 11792 275.562 140.8 79.3 95.8 96.6 9 101.6 1025.3 612.9 11792 275.562 140.8 79.3 95.8 96.6 9 101.6 11.4 1025.1 11792 275.562 140.8 95.6 95.8 95.8 95.8 95.8 95.8 95.8 95.8 95.8	112 118 113 33.44 644 645.5 114.6 103.5 11792 275.549 153.5 573 .003 140 45 24 66.9 1014 103.5 612.3 11792 275.552 140.8 79.3 .003 140 45 24 66.9 1014 103.1 11792 275.552 140.1 79.3 .003 140 45 24 66.9 1014 103.1 11792 275.552 140.1 79.3 .003 140 45 24 66.9 1014 103.1 11792 275.599 140.1 79.3 .003 140 45 24 66.9 1014 103.1 11792 275.599 140.1 79.3 .003 140 47 26 118 1 1889.3 1500.1 9535 275.599 212.7 296.8 .000 150 47 22 118 1 1889.3 1500.1 9535 275.598 285.7 296.8 .000 150 47 22 118 1 1889.3 1500.1 9535 275.598 287.7 208.4 12.9 208.5 12.0 12.0 12.0 12.0 12.0 12.0 12.0 12.0	112 -18			•	:	POOR	TON	CRIAT							•	
46	## 52	## 52	10			:	4	. T	34.14	40	400.5	ز	1	75.54	15			
4 46 294 66.09 101.6 1022.3 612.9 11794 275.579 1401. 79.3 1018 1018 101.4 10.05.1 101.9 11794 275.595 122.0 101.4 10.05.1 101.9 101.8 101.9 101.8 101.9 101.8 101.9 101.8 101.9 10.9 10	4 46 294 66:09 101:6 1022.3 612.9 11794 275.579 140:1 79.3 101 4 6 20 4 66:09 101:6 1022.3 612.9 11794 275.595 140:1 79.3 101 4 6 20 10:1 116:1 1928.4 1412.0 275.595 275.595 224.6 101 5 27 20.6 47.25 118.1 1489.3 1500.1 953.6 275.595 254.6 200.0 5 3 27 228.3 107:1 1220.0 962.8 980.0 275.596 12.0 20.0 5 4 7 129 10.6 7 120.0 962.8 980.0 275.596 12.0 20.0 5 5 13 80 20 10.6 7 120.0 962.8 980.0 275.596 12.0 187.2 101 5 6 15 20.0 49.94 112.1 2218.5 8944 275.596 1269.1 49.7 101 6 7 20 49.94 112.1 2218.5 424.9 8995 275.596 210.9 49.7 111 5 7 20 48.51 98.2 728.4 613.1 995 275.596 210.4 49.7 111 5 8 10 49.94 112.1 2218.5 424.9 8995 275.596 210.4 49.7 111 5 9 10 40.0 10.6 10.6 10.6 10.6 10.6 10.6 10.6 1	4 6 294 66:09 101:6 102:3 612:9 11794 275:595 140:1 793:3 100 4 6 204 66:09 101:6 1052:3 612:9 11794 275:595 140:1 793:3 100 4 6 20 4 7.6 116:1 116:1 1482.8 41820 275:595 285.6 200 7 7 19 20 8 47.25 118:1 1489.3 150:1 953 275:596 285.6 200 8 2 7 20 8 47.25 118:1 1489.3 150:1 953 275:596 2875 8 2 8 33 107:1 12.4 2.2 118:1 12.4 2.2 118.1 12.4 2.4 2.4 2.4 2.4 2.4 2.4 2.4 2.4 2.4	46 294 66.09 1111 0 10523 612.9 11794 275.595 14011 7973 130 46 27 66.66 1114 116 1152.3 612.9 11794 275.595 14011 7973 130 47 24 4 4 4 4 4 5.22 116.1 1928.4 1482.8 96.66 275.599 354.6 230.6 101 48 27 206 47.22 118.3 14692.9 1510.1 9935 275.599 354.6 230.6 101 49 47 22 10 47.22 118.3 14692.9 1510.1 9935 275.599 354.6 230.6 101 40 47 22 10 47.22 118.3 14692.9 1510.5 9930 275.599 354.6 101 40 47 22 10 47.22 118.3 14692.9 1510.5 9930 275.599 354.6 101 40 47 26 49.94 112.4 2210.9 962.8 9840 275.578 348.7 228.9 101 40 47 260 48.90 112.4 2210.9 962.8 9840 275.578 348.7 228.9 101 40 47 260 48.90 112.4 2210.9 962.8 9840 275.578 348.7 228.9 101 40 47 260 48.90 112.4 2218.9 101.9 9925 275.578 348.7 228.9 101 40 47 260 48.90 112.4 2218.9 9946 275.578 348.7 228.9 101 40 48 40 99 112.4 2218.9 9946 275.578 348.9 114.9 101 40 48 50 98.2 78.8 613.1 9925 275.578 34.9 114.9 114.9 114.9 111 41 40 48.50 98.2 118.6 628.9 40.7 275.560 1179.5 34.9 100 41 40 187 50.48 111.0 242.1 417.6 275.560 1179.5 34.9 100 41 40 187 50.48 111.0 242.1 417.6 6485 275.588 125.0 102.5 102.5 102.9 102.			1 6		7 P		101.6	53		170	7. 7.				
106 44 24 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	4 2 7 6 6 6 6 101.4 1036.1 610.3 11820 275.595 127.0 97.0 108 108 108 108 108 108 108 108 108 10	46 45 76 66.66 101.4 1056.1 610.3 11820 775.99 1270 97.0 10182	108 45 76 66.06 101.4 1056.1 610.3 11820 775.995 1270 97.9 1030 108 47.20 118.1 1928.4 1482.8 96.36 275.596 1270 97.9 1030 109 7 20 206 47.20 118.1 1928.4 1482.8 96.36 275.596 1270 97.9 1030 100 47.20 118.1 1928.4 1482.8 96.36 275.596 275.596 1270 101 102 22 118.3 1692.5 1512.6 96.3 275.594 12.9 226.0 101 102 22 49.94 112.1 122.4 183.6 9809 27.5 175.64 12.9 208.2 118.4 11.2 11.2 11.2 11.2 11.2 11.2 11.2 11		. 4	0	4	200		101.6	500		170	75.57	9		C	
106 44 240 47.20 11611 1528.4 1482.8 9636 275.595 354.6 230.6 10.0 27 206 47.25 1181.1 1528.4 1482.8 9636 275.595 354.6 230.6 10.0 27 206 47.25 1181.1 1528.4 1482.8 9635 275.595 354.6 230.6 10.0 27 20.6 47.25 1181.1 1528.4 1530.7 950.7 275.594 12.9 228.3 107.1 122.0 10.0 962.8 9809 275.594 12.9 228.2 1181.1 12.0 2240.4 433.5 8940 275.594 12.9 228.2 1181.2 42.9 1121.4 433.5 8940 275.594 12.9 228.7 1181.2 12.0 1121.4 2240.4 433.5 8940 275.594 12.9 228.7 1181.2 12.0 1181.2	108 44 240 47.20 116.1 1528.4 1482.8 9636 275.595 285.6 20.0 76 12 206 47.25 118.3 1682.3 1500.1 9535 275.595 285.6 20.0 82 206 47.25 118.3 1682.3 1500.1 9521 275.596 285.7 20.0 82 13 27 28.33 107.1 122.4 280.7 9507 275.594 12.9 226.6 0.0 96 13 27 28.30 106.7 128.1 963.2 9844 275.576 12.9 228.7 0.0 96 15 25 24.9 4 12.1 2.4 2240.4 433.5 8840 275.576 216.9 40.7 97 21 2 85 29 49.51 12.4 2240.4 433.5 8840 275.576 216.9 40.7 98 18 2 22 46.50 98.3 75.7 612.9 9946 275.576 216.9 40.7 98 18 2 22 97.37 94.7 612.1 9955 275.576 216.9 45.7 114.2	108 44 240 47.20 116.1 1528.4 1482.8 9636 275.596 285.7 296.8 000 70 19 208 47.25 118.1 1689.7 1500.1 9551 275.596 285.7 296.8 000 70 19 208 47.25 118.1 1689.7 1500.1 9521 275.596 22.0 0 10 10 10 10 10 10 10 10 10 10 10 10	108 44 240 47.20 116.1 1928.4 1482.8 9636 275.588 285.7 296.8 .00 76 27 206 47.25 118.1 1682.5 1510.1 9535 275.588 285.7 296.8 .00 82 3 3 206 47.25 118.1 1682.5 1510.1 9535 275.584 12.9 2240 .01 83 47.22 118.4 1684.7 1530.7 950.2 275.584 12.9 208.2 .01 84 47 22 118.4 1684.7 1530.7 950.2 275.584 12.9 208.2 .01 85 45 28.0 106.7 112.4 2240.4 43.6 8990 275.574 12.9 208.2 .01 86 47 20 47.22 118.4 12.4 43.6 8990 275.574 12.9 208.2 .01 86 47 20 49.9 112.4 2240.4 43.6 8990 275.574 12.9 208.2 .01 86 47 20 49.9 112.4 2240.4 43.6 8990 275.574 12.9 208.2 .01 86 47 20 49.9 112.4 2240.4 43.6 8990 275.574 12.9 208.2 .01 87 52 26 49.9 112.4 48.2 88.3 10.4 43.6 8995 275.584 216.9 49.7 114.9 88 6 7.3 99.7 3 99.7 40.4 61.1 9995 275.584 216.9 14.5 .01 89 7.3 99.7 3 99.7 3 99.7 2 40.4 92.7 275.594 210.4 8.4 .00 89 7.3 99.7 3 99.7 3 99.7 2 40.4 92.7 275.595 210.4 8.4 .00 89 7.3 99.7 3 99.7 3 99.7 2 40.4 92.7 275.596 217.9 8.0 80 8 9 7.3 9 9 9 73.8 9 73.8 9 73.8 8.0 117.9 2.0 93.7 275.596 179.5 34.5 .00 80 8 9 7.3 9 9 9 73.8 9 73.8 9 73.8 9 72.5 50.0 20.9 8.1 2.9 .00 80 8 9 7.3 9 9 9 7.3 9 9 703.0 613.4 721 275.556 179.5 34.5 .00 80 8 9 7.3 9 9 703.0 613.4 721 275.556 179.5 302.8 26.7 .00 80 8 9 7.3 9 9 703.0 613.4 721 275.556 179.5 302.8 26.7 .00 80 9 7 8 9 9 9 703.0 613.4 721 275.556 179.5 302.8 26.7 .00 80 9 7 8 9 9 703.0 613.4 721 275.557 302.8 26.7 .00 80 9 7 8 9 7 703.0 613.4 721 275.559 179.5 302.8 26.7 .00 80 9 7 8 9 7 703.0 613.4 721 275.559 179.5 302.8 26.7 .00 80 9 7 8 9 7 703.0 613.4 721 275.559 179.5 302.8 26.7 .00 80 9 7 8 9 7 703.0 613.4 721 275.559 179.5 302.8 26.7 .00 80 9 7 8 9 7 703.0 613.4 721 275.559 179.5 302.8 26.7 .00 81 10		1	• «	4	7,4		101.4	300	ie	11820	75.50				
76 27 206 47.25 116.1 1689.3 1500.1 9535 275.595 354.6 230.6 101 70 19 208 47.25 116.1 1689.3 1500.1 9535 275.599 354.6 224.0 101 82 3 27 28.33 107.1 1220.0 962.8 9609 275.598 27.9 187.2 101 83 27 28.33 107.1 1220.0 962.8 9609 275.588 27.9 187.2 101 84 15 252 49.94 112.4 2240.4 433.9 8955 275.569 156.9 1487.2 101 85 252 49.94 112.4 2240.4 433.9 8955 275.589 169.1 45.7 111 85 252 49.94 112.4 224.9 8955 275.589 169.1 45.7 111 85 252 49.94 112.4 224.9 8955 275.589 169.1 45.7 111 85 252 49.94 112.4 224.9 8955 275.589 169.1 45.7 111 85 252 49.95 110.4 20.85 7 80.4 40.0 90.0 275.50 169.1 45.7 111 85 30 37.37 94.7 55.8 40.4 925 275.58 275.9 8.0 20.5 5.0 86 18 38 97.37 94.7 55.8 40.4 925 275.59 8.0 20.5 5.0 87 42 22 38.0 11.9 241.2 755.5 7235 275.50 179.5 114.5 100 87 42 22 38.0 11.8 0.8 118.6 259.4 7211 275.55 179.5 179.5 110 88 51.26 96.8 111.0 212.7 1 417.6 6165 275.55 179.5 179.5 10.0 89 51.20 96.8 111.0 212.7 1 417.6 6165 275.55 179.5 10.0 89 51.20 96.8 111.0 212.7 1 417.6 6165 275.55 1 179.5 1 100 89 51.20 96.8 111.0 212.7 1 417.6 6165 275.55 1 179.5 1 100 89 51.20 96.8 111.0 212.7 1 417.6 6165 275.55 1 179.5 1 100 89 51.20 96.8 111.0 212.7 1 417.6 6165 275.55 1 179.5 1 100 89 51.20 96.8 111.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0	76 27 206 47.25 116.1 1689.3 1500.1 9535 275.595 354.6 230.6 10.0 1 2.0 47.25 116.3 1689.3 1500.1 9535 275.599 354.6 224.0 10.0 1 2.0 47.26 118.3 1682.7 1512.7 962.8 9809 275.594 12.9 208.7 112.7 26.3 107.1 122.0 962.8 9809 275.575 348.7 228.4 112.0 16.7 112.1 2216.5 9809 275.575 348.7 228.4 112.1 22.0 98.3 107.1 983.5 8955 275.575 348.7 228.4 112.1 22.0 98.3 107.5 112.1 22.0 98.4 275.575 348.7 228.4 112.1 22.0 98.3 107.5 112.1 22.0 98.5 275.584 275.5 16.9 16.9 17.5 11.0 10.4 224.0 17.5 11.0 10.4 224.0 17.5 11.0 17.5 11.0 11.0 11.0 11.0 11.0 11.0 11.0 11	76 27 206 47.25 118;1 1689.3 1500.1 9535 275.598 354.6 230.6 101	76 27 206 47.25 118;1 1689.3 1501.1 9535 275.598 254.6 230.6 670 170 129 208 47.25 118;1 1689.7 1512.6 9511 275.584 12.9 222.0 60 172 129 47.25 118,1 1220.0 962.8 9809 275.598 27.9 187.2 60 170 170 170 170 170 170 170 170 170 17			-	4	240		116.1	528	482	9636	75.58	85.		000	
70 19 208 47.22 118.3 1682.5 1512.0 9521 275.594 2.2 222.0 0.01 84 7 129 47.26 118.4 1682.7 1530.7 9507 275.584 27.9 18.2 20.01 95 13 85 28.30 106.7 112.4 1220.2 9844 275.584 12.9 208.2 .01 84 47 260 49.94 112.4 2240.4 433.5 8940 275.560 176.9 40.7 .11 85 47 260 46.50 96.51 2240.4 433.5 8940 275.560 176.9 40.7 .11 85 47 260 46.50 96.51 2240.4 433.5 8940 275.560 169.1 45.7 .11 85 47 260 46.50 96.51 2240.4 433.5 8940 275.560 169.1 45.7 .11 86 47 260 46.50 96.51 2240.4 433.5 8940 275.560 169.1 45.7 .11 87 220 97.37 94.7 2240.4 433.5 8940 275.560 210.4 8.0 .10 88 97.37 94.7 54.7 54.6 47.6 92.7 275.560 210.4 8.0 .10 89 98 2 788.7 467.4 9240 275.574 8.0 .114.5 .10 89 98 2 788.7 467.4 9240 275.560 213.8 14.5 .10 80 98 2 788.7 788.7 788.7 788.7 788.7 7211 275.60 170.5 34.5 .10 80 98 2 788.7 788.7 788.7 788.7 7211 275.60 170.5 34.5 .10 80 98 2 788.7 788.7 788.7 788.7 7211 275.560 170.5 34.5 .10 80 98 2 788.7 788.7 788.7 788.7 7211 275.560 170.5 34.5 .10 80 98 1 18.8 4 117.9 247.2 755.5 125.0 170.5 34.5 .10 80 98 2 788.7 788.7 788.7 788.7 7211 275.560 170.5 34.5 .10 80 98 1 10 1 88.4 117.9 247.2 755.5 125.6 170.5 34.5 .10 80 98 2 78.8 711.0 10.0 10.0 10.0 10.0 10.0 10.0 10.	70 19 208 47.22 118,3 1692,5 1512,6 9521 275,594 2.2 224,0 0.01 85 3 28.30 106,7 129.7 950, 275,584 12.9 0.01 87 129 47.22 118,4 1689,7 1530,8 9844 275,584 12.9 0.01 88 13 85 28.30 106,7 112,4 433,5 8940 275,584 176,9 187,2 0.01 89 13 85 28.30 106,7 112,4 433,5 8940 275,584 176,9 187,2 0.01 89 13 85 28,30 106,7 112,4 433,5 8940 275,587 169,1 49,7 111 89 14 7 260 48,51 98 2 724,4 433,5 8940 275,585 169,1 49,7 111 89 15 27 49,94 112,4 2240,4 433,5 8940 275,585 169,1 44,7 111 89 15 27 49,54 112,4 2240,4 433,5 8940 275,585 169,1 44,7 111 89 18 18 18 18 18 18 18 18 18 18 18 18 18	70 19 208 47.22 118.3 1692.5 1512.6 9521 275.598 2.2 224.0 001 85 47 129 47.22 118.3 1692.5 1512.6 9521 275.598 2.2 224.0 001 86 47 129 47.22 118.4 1689.7 1530.7 9507 275.584 12.9 0187.2 011 86 13 40 49.91 112.4 2240.4 433.5 8940 275.597 169.7 1187.2 86 47 260 49.91 112.4 2240.4 433.5 8940 275.573 348.7 228.4 011 86 47 260 49.91 112.4 2240.4 433.5 8940 275.573 348.7 228.4 011 87 220 49.91 112.4 2240.4 433.5 8940 275.573 348.7 228.4 011 88 47 260 48.50 98.2 728.4 613.1 9955 275.574 80 209.5 100 89 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	70 19 208 47.22 118.3 1692.5 1512.6 9521 275.598 2.2 224.0 1016		5	•	27	206		118.1	689	500	9535	75.59	54	:	.012	
69 47 129 47.26 118 4 1689.7 1530.7 950.7 275.584 12.9 208.2 .01 82 13 85 28.30 1105.7 1120.0 962.8 9809 275.568 12.9 208.2 .01 76 13 85 28.30 1105.7 1120.0 962.8 9809 275.568 27.9 187.2 .01 76 13 85 28.30 1105.7 1120.0 962.8 9804 275.573 378.7 227.9 187.2 .01 76 13 85 28.30 1105.7 1120.0 1224.9 9840 275.565 169.1 457.5 .11 84 47 260 48.51 98.2 7284.9 49.57 1105.9 9446 275.565 169.1 457.5 .11 78 31 229 48.51 98.2 7284.9 49.55 275.565 169.1 457.5 .11 85 47.37 99.73 99.75 40.75 99.75 275.569 210.4 4.2 .00 86 8.51 10.4 48.52 98.2 728.7 40.9 49.3 275.565 169.1 457.5 .00 87 12 222 98.2 728.7 616.4 993 275.546 213.8 14.5 .00 88 9.7 35 98.2 728.7 616.4 993 275.560 213.8 14.5 .00 89 323 38.80 117.9 2417.2 755.5 725.567 179.5 344.9 .00 80 323 38.80 118 6 2994.0 643.4 7211 275.565 179.5 344.9 .00 80 323 38.80 118.6 2994.0 643.4 7211 275.565 179.5 344.9 .00 80 323 38.80 118.6 2994.0 643.4 7211 275.565 179.5 34.5 .00 80 320 12 48.50 97.9 703.0 619.4 134.9 275.559 179.5 34.5 .00 81 14 101 80.84 197.3 9246 275.559 179.5 302.8 267.0 .00 82 9.78 10.8 111.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 83 84 10.8 51.8 51.8 51.8 11.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 84 84 84 10.8 11.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 85 85 85 85 85 818.1 1.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 85 85 85 85 85 85 85 85 85 85 85 85 85 8	69 47 129 47.26 118,4 1669.7 1530.7 9507 275.564 12.9 208.2 .01 82 3 27 240.4 1620.0 962.8 9809 275.568 12.9 208.2 .01 84 15 252 49.94 112.4 2240.4 433.5 8940 275.563 169.1 276.9 49.7 .11 84 47 260 48.50 98.3 742.4 433.5 8940 275.563 16.9 176.9 49.7 .11 85 252 49.94 112.4 2240.4 433.5 8940 275.563 16.9 176.9 11 85 252 49.94 112.4 2240.4 433.5 8940 275.563 16.9 176.9 11 86 89 28 30 10.4 2240.4 433.5 8940 275.569 216.9 49.7 .11 87 30 229 48.51 98.2 728.4 613.1 9955 275.578 216.9 49.7 .11 88 97.37 94.7 508.4 613.1 9955 275.578 210.4 8.4 .00 89 3 72 56.8 47.0 50.4 47.0 50.0 50.0 50.0 50.0 50.0 50.0 50.0 80 97.37 94.7 508.7 610.4 9951 275.560 212.9 1.2 114.5 .00 80 97.37 94.7 508.7 610.4 9951 275.560 212.9 1.2 114.5 .00 80 97.37 94.7 508.7 610.4 9951 275.560 212.9 1.2 114.5 .00 80 98.5 76.8 40.0 7.5 75.8 725.57.5 1.2 11.5 .00 80 98.5 76.8 40.0 7.5 75.8 725.5 72	69 47 129 47.26 118.4 1669.7 1530.7 9507 275.564 12.9 208.2 .01 97 13 85 28.33 107.1 1220.0 962.8 9809 275.564 12.9 208.2 .01 96 13 85 28.33 107.1 1220.0 962.8 9809 275.563 148.7 22.6 .01 96 13 85 28.3 10.6 12.4 2240.4 433.5 8940 275.563 148.7 22.6 .01 96 14 7 260 48.50 98.2 122.1 2228.5 424.9 9945 275.563 146.9 146.7 .11 97 26 49.99 110.4 2248.5 424.9 9945 275.563 146.9 49.7 .11 98 27 28 49.99 110.4 2248.5 424.9 9945 275.564 216.9 49.7 .11 98 36 97.3 94.7 559.6 470.6 9943 275.574 8.0 210.4 4.0 98 37 27 616.9 9943 27.28.7 616.4 9291 275.564 213.8 144.5 .11 98 38 97.3 94.7 559.6 470.6 9943 275.574 8.0 200.5 .10 98 38 40 110.4 80.8 111.9 247.2 755.6 275.6 2 125.0 14.5 .10 98 38 40 117.9 241.2 755.6 2 125.0 179.5 34.5 .10 99 38 38 40 117.9 241.2 755.6 2 125.0 179.5 34.9 .10 90 21 10 10 10 10 10 10 10 10 10 10 10 10 10	69 47 129 47.26 118 4 168.7 1530.7 9507 275.584 12.9 208.2 .01 97 13 85 28.30 107.1 122.0 962.8 9809 275.584 12.9 208.2 .01 98 13 27 28.30 107.1 122.0 962.8 9809 275.584 12.9 208.7 99 13 85 28.30 107.1 122.0 962.8 9809 275.584 12.9 228.4 .01 96 15 252 49.91 112.4 2240.4 433.5 8940 275.600 176.9 49.7 .11 96 15 252 49.51 12.1 2218.5 424.9 8955 275.585 169.1 49.7 .11 97 22 9 48.51 98.2 728.4 613.1 9955 275.587 210.4 8.4 .00 98 11 14 48.22 98.2 728.7 610.4 9951 275.564 210.4 8.4 .00 98 11 14 48.22 98.2 728.7 610.4 9951 275.604 213.8 14.5 .00 98 11 14 48.22 98.2 728.7 610.4 9951 275.604 213.8 14.5 .00 99 12 22 97.35 94.7 55.8 621.8 9937 275.576 210.4 14.5 .00 91 14 101 80.81 88.4 897.2 755.6 222.6 344.9 .00 91 14 101 80.81 88.4 897.3 725.587 175.3 32.8 24.5 .00 91 14 101 80.81 88.4 897.3 721 275.565 122.0 581.5 .00 91 15 48.50 97.9 703.0 615.4 9240 275.555 122.0 581.5 .00 91 15 48.50 97.9 703.0 615.4 124.9 275.587 179.3 32.8 26.7 0 .00 91 17 48.16 09.8 11.0 02.27.1 417.6 6165 275.556 179.3 32.8 267.0 .00 91 17 48.16 09.8 11.0 02.27.1 417.6 6165 275.558 179.3 32.8 26.7 0 .00 91 17 48.16 09.9 91.2 7.6 69.4 275.588 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.1 7.6 6165 275.589 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.1 7.6 6165 275.589 179.3 32.4 63.1 .00 91 15 48.50 07.9 70.0 615.4 615.5 275.589 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.2 7.8 69.4 275.589 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.2 7.7 614.7 614.9 69.4 275.589 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.2 7.8 69.4 275.589 179.3 32.4 63.1 .00 91 17 48.16 09.9 91.2 7.8 69.4 275.589 179.3 32.4 63.1 .00		5.	7	16	208		118,3	692.	512.	9521	75.59	ູ້		.011	
82 3 27 28,3 107,1 1220.0 962.8 9809 275,568 27,9 187.2 .01 74 13 40 99.9 112.4 435.6 8940 275,569 169.1 228.4 .01 75 15 252 49.94 112.1 2218.5 424.9 8955 275,560 169.1 45.7 .11 84 47 260 46.50 98.3 735.7 615.9 8946 275,560 169.1 45.7 .11 85 47 260 46.50 98.3 735.7 615.9 8946 275,560 169.1 45.7 .11 85 47 260 46.50 98.3 735.7 615.9 8946 275,564 216.9 4.2 .00 85 18 97.37 94.7 519.6 40.0 9955 275,564 216.9 4.2 .00 85 18 97.37 94.7 539.6 470.4 9951 275,564 210.4 8.4 .00 85 18 97.37 94.7 539.6 470.4 9237 275,542 8.0 209.5 .00 85 18 97.37 94.7 539.6 470.4 9951 275,564 210.4 8.0 209.5 .00 85 18 97.37 94.7 539.6 470.4 9951 275,564 213.8 14.5 .00 85 18 97.37 94.7 539.6 470.4 9951 275,560 213.8 14.5 .00 85 18 97.37 94.7 539.6 470.4 9951 275,560 213.8 14.5 .00 85 18 97.3 110.4 80.8 621.8 621.8 9937 275,560 175.3 46.9 .10 85 18 18 18 18 18 18 18 18 18 18 18 18 18	82 3 27 28.33 107,1 1220.0 962.8 9809 275,568 27.9 187.2 .01 97 13 85 28.30 106.7 112.4 2240.4 433.5 8940 275,573 348.7 228.4 .01 75 13 40 49.91 112.4 2240.4 43.5 8940 275,560 169.1 176.9 49.7 .11 84 47 260 48.50 98.3 728.4 613.1 9955 275,564 216.9 45.7 .11 85 30 229 48.5 10.4 28.4 613.1 9955 275,578 210.9 45.7 .11 85 18 30 229 48.5 19.8 29.8 40.8 275,578 8.0 210.4 8.4 .01 85 18 30 22.2 49.39 110.4 228.4 613.1 9955 275,574 8.0 209.5 .01 85 18 48.50 98.2 728.7 40.4 9237 275,574 8.0 209.5 .00 85 18 48.50 98.2 728.7 40.4 9237 275,574 8.0 209.5 .00 85 18 48.50 98.2 728.7 40.4 9240 275,574 8.0 209.5 .00 85 18 48.50 98.3 728.7 467.4 9240 275,574 8.0 209.5 .00 85 18 28 38.8 111.9 2417.2 755.5 175.5 179.5 179.5 .00 85 14 101 80.8 18.6 2894.0 473.5 275,584 179.5 34.5 .10 85 18 18 18 11.0 0.00ERTAIN 85 18 28 28 28 28 28 28 28 28 28 28 28 28 28	82 3 27 28.33 107,1 1220.0 962.8 9809 275,568 27.9 187.2 .01 97 13 85 28.30 106.7 112.0.0 962.8 9809 275,568 27.9 187.2 .01 76 13 40 49.94 112.1 2218.5 424.9 8955 275,560 169.1 45.7 .11 84 47 260 46.50 98.3 75.7 619.9 9946 275,564 216.9 45.7 .11 85 25 49.94 112.1 2218.5 424.9 8955 275,564 216.9 45.7 .11 85 20 212 49.39 110.4 2218.5 424.9 8955 275,564 216.9 45.7 .11 85 30 212 49.39 110.4 228.4 413.1 9955 275,574 81.0 114.9 .11 85 48 40 50 212 49.39 110.4 228.6 470.4 9237 275,574 81.0 114.9 .11 85 48 5 28 97.37 94.7 559.6 470.4 9237 275,574 81.0 114.9 .11 85 12 22 38.9 110.4 228.7 245.7 275,560 213.9 210.4 10.0 85 14 10.0 11.9 24.7 2 467.4 9240 275,560 212.6 344.9 .00 85 14 10.0 11.9 22.7 1 417.6 6165 275,555 179.5 34.5 .10 85 14 10.0 00.0 11.0 21.7 1 417.6 6165 275,555 179.3 32.4 .11 85 18 56.0 11.1 22.7 1 417.6 6165 275,555 179.3 32.4 .11 85 18 56.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 56.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 22.7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 2.2 2.2 118.1 1.0 2.2 7 1 417.6 6165 275,558 179.3 32.4 .11 85 18 46.0 11.1 2.2 7 11.1 2.	82 3 27 28,33 107,1 1220.0 962.8 9609 275,568 27,9 188.2 .01 76 13 85 28,30 106,7 1124, 432.2 9844 275,573 348.7 228.4 .01 76 15 252 49.94 112.1 2248.5 424.9 8955 275,565 169.1 45,7 .11 84 47 260 46,50 98.3 724.7 412.1 2248.5 840 275,565 169.1 45,7 .11 85 30 229 46,51 98.2 784 413.1 9955 275,584 210.9 4.2 85 18 97.37 94.7 289.6 470.4 9247 275,562 114.5 .11 85 97.37 94.7 289.6 470.4 9921 275,544 213.8 .11 85 97.37 98.2 784.7 613.1 9955 275,544 213.8 .11 85 97.37 98.2 784.7 613.1 9951 275,544 213.8 .14 85 97.37 98.2 784.7 613.8 9947 275,544 213.8 .14 85 97.37 98.2 784.7 613.8 9940 275,544 213.8 .14 85 97.37 98.2 784.7 613.8 9940 275,544 213.8 .14 85 97.37 98.2 784.7 613.8 940 275,544 213.8 .14 85 97.37 98.2 188.6 621.8 9947 275,544 213.8 .14 85 97.37 98.2 188.6 621.8 9947 275,544 213.8 .14 85 97.38 98.9 118.6 2994.0 643.4 725.6 91 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 7211 275,562 179.5 34.9 .00 85 98.9 118.6 2994.0 643.4 779.5 275,569 179.5 32.4 .11 85 98.9 118.0 212.7 14.4 17.6 6465 275,569 179.5 32.4 .11 86 98.9 114.0 212.7 14.4 17.6 6465 275,569 179.5 32.4 .11 86 98.9 114.0 212.7 14.4 17.6 6465 275,569 179.5 32.4 .11 87 98.1 14.0 99.9 12.7 14.4 17.6 6465 275,569 179.5 98.6 .00 88 98 98 98 98 98 98 98 98 98 98 98 98 9		53	•	47	129		118,4	689.	530.	9507	75,58	å		.010	
97 13 85 28.30 106,7 118/1 963.2 9844 275.573 348.7 228.4 011 76 13 22 94 112.4 2240.4 433.5 8940 275.575 146.9 49.7 118/1 81 47 260 49.94 112.4 2240.4 433.5 8940 275.565 169.1 82 47 260 49.50 98.3 735.7 615.9 9946 275.565 169.1 83 50 222 49.39 110.4 228.4 613.1 9955 275.564 216.9 49.7 114.5 84 47 260 49.50 99.3 735.7 615.9 9946 275.576 216.9 45.2 100.4 85 18 38 97.37 94.7 613.1 9955 275.574 216.9 14.5 100.4 85 18 30 97.37 94.7 53.9 47.7 616.4 9921 275.564 216.9 114.5 100.4 85 18 30 97.37 94.7 53.8 99.7 275.546 222.6 344.9 100.4 85 18 30 97.37 94.7 53.2 467.4 9240 275.567 34.9 100.4 85 18 30 97.37 94.7 53.2 467.4 9240 275.567 34.9 100.4 86 18 18 88.6 28.9 117.9 241.2 755.6 175.3 46.9 110.4 87 12 10 1 10.8 1	97 13 85 28.30 106,7 118/1 963.2 9844 275.573 348.7 228.4 013 6 15 25 994 112.4 2240.4 433.5 8940 275.575 348.7 228.4 014 6 15 25 99.9 112.1 2.4 2240.4 835.5 8940 275.567 115.9 49.7 115.9 6 15 26 48.50 98.3 735.7 615.9 9946 275.567 116.9 49.7 116.9 6 18 20 48.51 98.2 735.2 409.4 210.4 9955 275.567 210.4 45.7 116.9 6 18 30 97.37 94.7 278.4 409.6 9937 275.576 210.4 8.4 0.00 6 19 30 97.37 94.7 278.7 410.4 9951 275.576 210.4 8.7 0.00 6 19 30 94.7 278.7 467.4 9240 275.577 8.00 6 10 40 98.2 78.5 94.7 837.2 467.4 9240 275.577 8.1 114.5 0.00 6 10 20 98.2 18.6 621.8 9937 275.567 213.8 14.5 0.00 6 10 20 98.3 18.6 621.8 643.4 721. 275.567 179.5 34.5 0.00 6 10 20 20 20 20 20 20 20 20 20 20 20 20 20	97 13 85 28.30 106,7 118/1 963.2 9844 275,573 348.7 228.4 .01 76 15 40 49.91 112.4 2240.4 433.5 8940 275.565 169.1 49.7 .11 81 47 260 48.50 98.3 735.7 618.9 8946 275.569 169.1 45.7 .11 82 47 260 48.51 98.2 735.7 618.9 8946 275.564 210.9 4.2 .00 75 30 229 48.51 98.2 735.7 618.9 9946 275.564 210.9 8.4 .00 78 30 229 48.51 98.2 728.4 613.1 9955 275.569 210.4 8.4 .00 43 1 4 48.2 98.2 728.7 616.4 927 275.574 91.2 114.5 .11 48 40 50 48.5 98.3 728.7 616.4 9951 275.574 91.2 114.5 .11 48 40 50 48.5 98.3 736.8 621.8 937 275.574 91.2 213.8 .10 61 39 323 38.9 118,6 2894.0 643.4 721 275.565 179.5 344.9 .00 62 -4 225 38.9 118,6 2894.0 643.4 721 275.565 179.5 34.5 .10 62 14 101 80.8 188.4 197.3 9216 275.557 179.5 34.5 .10 63 14 101 80.8 1 88.4 197.3 9216 275.557 179.5 34.5 .10 64 48.5 10.8 111.0 2127.1 417.6 6165 275.557 179.3 32.4 .11 65 28 48.5 0 97.9 703.0 619.4 124.9 275.558 179.3 32.4 .11 66 28 48 48 48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 67 28 48.5 0 97.9 703.0 619.4 124.9 275.558 179.3 32.4 .11 68 48 48 68 68 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 68 48 48 48 68 68 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 68 68 68 7 7 8 703.0 619.4 275.558 179.3 32.4 .11 69 69 7.9 703.0 619.4 124.7 511.9 6984 275.558 179.5 53.1 .08 69 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.6 6165 275.558 179.5 53.1 .08 60 7.9 703.0 619.4 124.7 618.7 618.8 129.4 63.1 63.1 63.1 63.1 63.1 63.1 63.1 63.1	97 13 85 28.30 106,7 118/1 963.2 9844 275,555 348.7 228.4 .01 76 13 40 49.91 112.4 2240.4 433.5 8940 275.565 169.1 49.7 .11 64 15 252 49.94 112.1 2218.5 615.9 8955 275.565 169.1 4.2 .00 75 50 50 50 60 48.50 98.2 758.4 613.1 9955 275.564 216.9 4.2 .00 75 51 229 48.51 98.2 758.4 613.1 9955 275.564 216.9 4.2 .00 75 51 229 48.51 98.2 758.4 613.1 9955 275.567 210.4 8.4 .00 75 18 30 229 48.51 98.2 728.7 616.4 9951 275.567 210.4 8.4 .00 75 18 48.2 98.2 728.7 616.4 9951 275.567 210.4 8.0 .00 75 18 48.2 97.3 94.7 516.8 9937 275.578 210.4 8.0 .00 75 18 48.2 97.3 94.7 516.4 9937 275.578 210.4 8.0 .00 75 18 48.2 97.3 94.7 516.8 9937 275.560 213.8 14.5 .00 75 18 48.5 97.3 94.7 517.2 755.5 775.567 179.5 34.9 .00 76 18 18 18 18 18 18 18 18 18 18 18 18 18		58	•	ю	27		107,1	220.	å	6086	75,56			.017	
76 13 40 49.91 112.4 2240.4 433.5 8940 675.600 176.9 49.7 114 4 7 260 49.94 112.1 2218.5 424.9 8955 675.560 169.1 4.2 114.8 4 7 260 48.51 98.2 728.4 613.1 9955 275.564 216.9 4.2 10.0 75 30 229 48.51 98.2 728.4 613.1 9955 275.564 210.4 8.4 10.0 6 18 18 22 97.37 94.7 728.4 613.1 9955 275.564 210.4 8.4 10.0 6 18 18 22 97.37 94.7 728.8 9937 275.560 210.4 8.4 10.0 6 18 18 18 18.6 29.9 1 275.60 213.8 144.9 10.0 6 18 18 18 18 18 18 18 18 18 18 18 18 18	76 13 40 49.91 112.4 2240.4 433.5 8940 675.600 176.9 49.7 114 66 15 25 49.94 112.1 2218.5 424.9 8955 675.560 169.1 45.7 114 66.50 35 49.94 112.1 2218.5 424.9 8955 275.564 216.9 4.2 20.0 86.50 98.2 728.7 613.9 9946 275.564 210.4 8.4 2.0 00 212 49.39 110.4 218.3 40.6 9043 275.564 210.4 8.4 2.0 00 212 49.39 110.4 218.3 40.6 9043 275.564 210.4 8.4 2.0 00 49.7 37 94.7 399.6 470.4 9951 275.604 213.8 144.5 00 48.5 0 98.3 728.7 616.4 9951 275.604 213.8 144.5 00 48.5 0 98.3 728.7 616.4 9951 275.604 213.8 144.5 00 48.5 0 98.3 728.7 616.4 9951 275.604 213.8 144.5 00 48.5 0 98.3 728.7 616.4 9951 275.604 213.8 144.5 00 48.5 0 98.3 728.7 616.4 924 275.560 213.8 144.5 00 48.5 0 98.3 118.6 2894.0 643.4 7211 275.560 177.5 344.9 00 48.5 0 98.3 118.6 2894.0 643.4 7211 275.560 177.5 344.9 00 48.5 0 98.4 117.9 2417.2 755.5 7235 275.561 177.5 34.5 112.6 96.8 113.0 00 643.4 7211 275.565 177.5 34.5 112.6 96.8 113.0 00 643.4 7211 275.565 177.5 34.5 112.6 96.8 113.0 00 643.4 7211 275.565 177.5 34.5 112.6 96.8 113.0 643.4 124.4 124.4 113.0 2127.1 417.4 6415.2 275.58 177.3 32.4 131.0 00 643.4 124.9 6984 275.58 177.3 32.4 131.0 00 643.4 124.9 6984 275.58 177.3 32.4 131.0 00 643.4 124.9 6984 275.58 177.3 32.4 131.0 00 643.4 124.9 6984 275.58 177.3 98.6 100.0 00 643.4 124.9 6984 275.58 127.4 69.5 98.6 100.0 00 643.4 124.9 6984 275.58 117.0 6415.7 698.1 124.9 6984 275.58 117.0 6415.7 698.1 124.9 6984 275.58 117.0 6415.7 698.1 127.9 68.6 117.0 6415.7 698.1 127.0 6817 11.0 11.0 11.0 11.0 11.0 11.0 11.0 11	76 13 40 49.91 112.4 2240.4 433.5 8940 675.600 176.9 49.7 114 47 225 49.94 112.1 2218.5 424.9 8955 675.569 169.1 45.7 114 47 226 46.50 96.2 725.564 216.9 45.7 114 47 226 46.50 96.2 726.4 9945 275.564 216.9 45.7 114.5 114.5 114.4 81.2 96.2 726.4 9945 275.564 210.4 81.4 114.4 81.2 96.2 726.6 9143 275.564 210.4 81.4 114.4 81.2 96.2 726.6 9143 275.564 210.4 81.4 114.5 114.5 114.5 114.4 92.7 726.8 612.8 9937 275.56 91.2 114.5 114.5 114.5 114.5 114.4 92.7 726.8 612.8 9937 275.56 91.2 114.5 114	76 13 40 49.91 112.4 2240.4 433.5 8940 275.60 176.9 49.7 111 66.6 15 252 49.94 112.1 2218.5 424.9 8955 275.565 169.1 457. 111 6.0 176.9 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.1 46.5 169.2 10.4 46.5 16.4 10.4 46.5 16.4 10.4 46.5 16.4 10.4 46.5 16.4 46.5		650	0	13	89		106,7	187.	'n	9844	75.57	÷	÷	.015	
66 15 252 49.94 112,1 2218,5 424,9 8955 275,565 169,1 45,7 111 81 47 260 48,50 98,3 735,7 613,9 9946 275,564 216,9 4.2 100 79 30 229 48,51 98,2 738,4 613,1 9955 275,542 210,4 9.4 101 63 18 38 97,37 94,7 539,6 470,4 9237 275,542 91,2 114,5 114,5 114,5 114,4 8.2 98,2 725,54 8.0 222,6 91,2 114,5 114,5 114,5 114,5 114,4 8.2 98,2 725,54 622,8 8.0 209,5 100 81 14 48,50 98,2 728,5 647,4 9240 275,574 8.0 209,5 100 81 12 222 97,35 94,7 537,2 467,4 9240 275,56 222,6 344,9 100 81 14 101 80,81 88,4 897,3 7211 275,56 179,5 34,5 112,5 114,5 1	66 15 252 49.94 112,1 2218.5 424.9 8955 275.565 169.1 45.7 11. 81 47 260 46.51 98.3 725.7 615.9 9946 215.94 216.9 4.2 10.0 75 30 229 46.51 98.3 725.7 615.9 9946 275.564 216.9 4.2 10.0 76 47 260 46.51 98.3 725.7 615.4 613.1 9955 275.564 210.4 114.5 11.1 78 48 47 260 46.51 98.3 110.4 2083.2 409.5 275.546 210.4 11.4 11.4 78 48 40 50 212 49.39 110.4 20.83 4.7 616.4 9951 275.546 213.8 114.5 11.1 78 48 40 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 48 40 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 48 40 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 48 40 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 48 40 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 48 49 50 98.3 726.8 621.8 9937 275.546 222.6 344.9 10.0 78 50 50 50 50 50 50 50 50 50 50 50 50 50	66 15 252 49.94 112,1 2218.5 424.9 8955 275.564 216.9 4.2 .01 81 47 260 48.50 98.3 728.4 613.1 9946 275.564 210.4 4.2 .00 79 30 222 49.39 110.4 2083.2 403.1 9946 275.564 210.4 8.2 .00 50 18 38 97.37 94.7 539.6 470.4 9237 275.542 91.2 114.5 .11 68 18 38 97.37 94.7 539.6 470.4 9237 275.542 91.2 114.5 .10 40 40 50 212 49.39 110.4 2083.2 470.4 9240 275.574 8.0 209.5 .00 51 14 48.50 98.2 728.7 645.4 9240 275.574 8.0 209.5 .00 52 97.35 94.7 537.2 467.4 9240 275.560 8.1 219.4 .00 51 12 22 97.35 94.7 537.2 467.4 9240 275.560 8.1 219.4 .00 52 97.35 94.7 537.2 467.4 9240 275.560 1.79.5 .00 52 97.35 94.7 537.2 467.4 9240 275.560 1.79.5 .00 52 97.35 94.7 537.2 467.4 9240 275.560 1.79.5 .00 53 32.3 34.80 112.9 2417.2 755.56 1.25.0 1.02.5 .00 54 10 180.81 88.4 197.3 9216 275.660 1.25.0 1.02.5 .00 55 12 48.50 97.9 703.0 615.4 1.349 275.555 1.79.3 32.4 .11 56 12 48.50 97.9 703.0 615.4 1.349 275.555 1.79.3 32.4 .11 54 14 14 10 180.81 1.10 2.27.1 417.6 6165 275.588 1.79.3 32.4 .11 55 17 18 18 18 11.0 2.27.1 417.6 6165 275.588 1.79.3 32.4 .11 56 17 18 18 18 18 18 18 18 18 18 18 18 18 18	66 15 252 49.94 112,1 2218.5 424.9 8955 275.565 169.1 45.7 11. 81 47 266 46.50 98.3 735.7 613.9 9946 275.564 216.9 4.2 10. 75 30 229 46.51 98.3 728.4 613.1 9955 275.564 216.9 4.2 10. 76 50 212 49.39 110.4 2083.2 409.6 9043 275.578 8.0 210.4 9.0 78 18 38 97.37 94.7 539.6 410.4 9237 275.546 213.8 114.5 11. 78 48 40 50 98.3 70.4 70.4 9951 275.546 213.8 11. 78 48 40 50 98.3 70.4 70.4 9951 275.546 213.8 11. 78 48 40 50 98.3 70.4 90.3 70.4 90.3 70.4 90.3 11. 78 48 40 50 98.3 70.4 80.2 70.4 90.3 11. 78 48 40 50 98.3 70.4 80.4 80.4 80.4 80.4 80.4 80.4 80.4 8		090	^	13	0		112,4	240.	'n	8940	75.60	š		.117	
84 47 260 48.50 98.3 735.7 615.9 9946 275.564 216.9 4.2 .00 75 50 50 222 48.51 98.2 728.4 613.1 9955 275.576 210.4 8.4 .00 50 50 50 50 222 48.51 94.7 539.6 470.6 9043 275.576 210.4 8.4 .00 43 11 14 48.52 98.2 728.7 616.4 9951 275.574 810 209.5 .00 48 40 50 60 48.50 98.3 728.7 616.4 9951 275.504 213.8 144.5 .00 48 40 50 60 48.50 98.3 728.7 616.4 9951 275.504 213.8 14.5 .00 51 14 68.50 97.35 94.7 537.2 467.4 9240 275.504 213.8 14.5 .00 52 22 97.35 94.7 537.2 467.4 9240 275.504 213.8 14.5 .00 52 3 32 38.80 117.9 2417.2 755.5 721 275.56 1779.5 34.9 .00 52 4 10 10 10 10 10 10 10 10 10 10 10 10 10	84 47 260 48.50 98.3 735.7 615.9 9946 275.564 216.9 4.2 .00 755 30 229 48.51 98.2 728.4 613.1 9955 275.574 210.4 65 18 38 97.37 94.7 539.4 470.4 9237 275.574 81.0 65 18 38 97.37 94.7 539.6 470.4 9237 275.574 81.0 65 18 48.52 98.2 728.7 616.4 9951 275.604 213.8 64 48.50 94.7 539.6 470.4 9237 275.574 81.0 65 18 40 50 81.7 756.8 621.8 9937 275.574 213.8 64 39 32.3 34.80 117.9 2417.2 755.6 725.604 225.6 344.9 .00 64 39 32.3 34.80 117.9 2417.2 755.5 725.5 61 1/5.3 46.9 .10 64 39 32.3 34.80 117.9 2417.2 755.5 725.5 61 1/5.3 46.9 .10 64 39 32.3 34.80 117.9 2417.2 755.5 725.5 61 1/5.3 46.9 .10 64 39 32 32.8 111.0 2127.1 417.6 6165 275.55 172.0 102.5 .00 65 50 50 50 61 11.0 2127.1 417.6 6165 275.55 179.3 32.4 .11 65 60 29 338 28.0 108.1 1/64.7 511.9 6984 275.58 179.3 32.4 .11 66 29 445 117.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 67 68 17 68 18 17.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 68 17 68 18 17.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 69 60 81 11.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 60 60 82 445 117.0 8817 11.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 60 60 82 445 117.0 8817 11.0 2427.1 417.6 6165 275.58 179.3 32.4 .11 60 60 82 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 .00	84 47 260 48.50 98.3 735.7 615.9 9946 275.564 216.9 4.2 .00 755 30 229 48.51 98.2 728.4 613.1 9955 275.564 210.4 8.4 .00 50 50 50 212 48.51 98.2 728.4 410.4 9951 275.576 210.4 8.4 .00 43 11 4 48.52 98.2 728.7 410.4 9951 275.564 213.8 144.5 .00 48 40 40 50 48.50 98.3 726.8 621.8 9937 275.564 213.8 14.5 .00 51 14 48.50 98.3 726.8 621.8 9937 275.564 223.8 344.9 .00 52 22 97.35 94.7 537.2 467.4 9240 275.567 223.8 344.9 .00 52 3 32 38.80 117.9 2417.2 755.5 721 275.567 222.6 344.9 .00 52 3 30.95 118.6 2894.0 643.4 725.5 56 179.5 34.5 .12 64 39 9237 275.6 118.6 2894.0 643.4 725.5 67 179.5 34.5 .12 65 14 101 88.4 88.4 197.3 197.3 9216 275.565 179.5 102.5 .00 65 15 16 51.2 69.8 111.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 66 29 48.50 9817 17.9 2127.1 417.6 6165 275.559 179.3 32.4 .11 67 18 HELOGENTRIC ORBIT 1 1.04.7 511.9 6984 275.588 179.3 32.4 .11 68 17 48.50 9817 1 1.04.7 511.9 6984 275.588 179.3 32.4 .11 68 18 18 18 18 18 18 18 18 18 18 18 18 18	84 47 260 48.50 98.3 735.7 615.9 9946 275.564 216.9 4.2 .00 75 50 50 212 49.51 98.2 728.4 613.1 9955 275.576 210.4 8.4 .00 50 50 50 50 48.51 98.2 728.4 409.6 9043 275.576 210.4 8.4 .00 43 18 28 97.37 94.7 539.6 470.4 9237 275.574 8.0 209.5 .01 45 40 50 68 72 98.2 728.7 616.4 9951 275.574 8.0 209.5 .00 57 12 14 48.52 98.2 728.7 616.4 9951 275.504 213.8 14.5 .00 58 14 10 80.81 80.8 7 837.2 467.4 9240 275.560 213.8 14.5 .00 58 14 101 80.81 80.4 197.3 197.3 197.3 575.56 175.5 175.1 219.4 .00 59 15 16 51.26 96.8 72.9 725. 725.5 175.56 175.5 175.1 101.5 .00 59 16 51.26 96.8 72.9 725. 725.5 175.56 175.5		55	•	12	252		112,1	218.	÷	8955	75,56	ċ		.116	
75 30 229 48.51 98.2 728.4 613.1 9955 275.578 210.4 8.4 0.00 65 18 38 92.3 94.3 910.4 2083.2 470.4 9237 275.74 91.2 114.5 114.	75 30 229 48.51 98.2 728.4 613.1 9955 275.578 210.4 8.4 0.00 50 850 212 49.39 110.4 2083.2 470.4 9237 275.578 810 209.5 114.5 11 65 8.4 0.00 209.3 110.4 2083.2 470.4 9237 275.504 810 209.5 100 65 8.4 0.00 88.2 98.2 728.7 616.4 9951 275.604 213.8 14.5 100 65 8.4 0.00 88.7 537.2 467.4 9240 275.56 222.6 344.9 100 65 8.4 225 97.35 94.7 537.2 467.4 9240 275.56 222.6 344.9 100 65 8.4 39 323 34.80 117.9 2417.2 755.5 7235 275.56 179.5 344.9 100 65 8.4 225 38.8 118.6 2894.0 643.4 7211 275.56 179.5 34.5 110 65 8.4 225 38.8 118.6 2894.0 643.4 7211 275.56 1179.5 34.5 110 65 8.5 12.6 9.8 118.6 113.0 113.0 113.0 615.4 125.0 112.5 110 60 80 338 28.8 111.0 2227.1 417.6 6155 275.58 129.4 63.1 100 60 80 338 28.8 111.0 2227.1 417.6 6155 275.58 129.4 63.1 108 60 80 338 28.8 111.0 2227.1 417.6 6155 275.58 129.4 63.1 108 60 80 338 28.8 11.0 1081 1.704.7 511.9 6984 275.58 129.4 63.1 108 60 80 45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 100	75 30 229 48.51 98.2 728.4 613.1 9955 275.578 210.4 8.4 0.00 50 18 28 94.3 110.4 2045.2 409.6 9043 275.574 8.0 50 18 38 97.37 94.7 726.8 621.8 9937 275.604 213.8 144.5 0.00 51 14 48.52 98.2 726.7 616.4 9951 275.604 213.8 144.5 0.00 52 2 97.35 98.2 726.8 621.8 9937 275.564 213.8 144.5 0.00 53 32 34.9 117.9 2417.2 755.6 725.5 6 222.6 344.9 0.00 51 39 323 34.8 117.9 2417.2 755.5 725.5 275.56 122.6 344.9 0.00 52 14 101 80.8 1 80.4 47.7 31.2 725.5 5 725.5 175.5 1	75 30 229 48.51 98.2 728.4 613.1 9955 275.578 210.4 8.4 0.00 50 48.5 29 48.5 294.3 110.4 2048.2 409.6 9043 275.578 91.2 114.5 114.5 65 48 50 24.3 110.4 2048.2 400.6 9043 275.56 4 91.2 114.5 114.5 65 48 50 48.5 0 98.2 728.7 616.4 9951 275.60 4 213.8 14.5 100 64 39 323 34.8 0 117.9 2417.2 755.6 7 275.56 2 22.6 344.9 100 65 39 323 34.8 0 117.9 2417.2 755.5 7235 275.56 175.3 46.9 110 65 39 323 34.8 0 117.9 2417.2 755.5 7235 275.56 1179.5 110.4 100 65 4 29 10 117.9 2417.2 755.5 7235 275.56 1179.5 110.4 100 65 4 29 10.8 1 80.8		63	6 0	47	260		96.3	735.7		9846	75,58	٠.	:	900*	
50	50 =50 212 49.39 110.4 2083.2 409.6 9043 275.542 91.2 114.5 111.4 2 48.22 47.37 94.7 539.6 470.4 9237 275.574 8.0 209.5 100.4 48.2 2 97.37 94.7 539.6 470.4 9951 275.504 222.6 344.9 100.4 48.2 2 97.35 94.7 530.8 621.8 9937 275.546 222.6 344.9 100.4 12.2 2.2 97.35 94.7 537.2 467.4 9940 275.502 8.1 219.4 100.4 117.9 2417.2 755.5 7235 275.56 17.5 3 44.9 100.4 117.9 2417.2 755.5 7235 275.56 17.5 3 46.9 110.4 11.4 11.4 11.4 11.4 11.4 11.4 11.	50	50		49	7	30	229		98 2	728.4	'n	9955	75.57		•	900.	
## 18	68 18 38 97,37 94,7 539,6 470,4 9237 275,574 8,0 209,5 100 43 14 48,52 98,2 726,7 616,4 9951 275,604 213,8 14,5 100 48 40 22 97,35 94,7 537,2 467,4 9937 275,546 222,6 344,9 100 57 12 22 97,35 94,7 537,2 467,4 9240 275,560 28,1 219,4 100 IN HELTOCENTRIC ORBIT 2417,2 759,5 7235 275,587 1/5,3 46,9 110 64 39 32 34,80 117,9 2417,2 759,5 7235 275,587 1/5,3 46,9 110 64 39 32 34,80 117,9 2417,2 759,5 7235 275,587 1/5,3 46,9 110 64 39 32 34,80 117,9 2417,2 759,5 721 275,602 179,5 34,5 112 64 39 32 34,80 111,0 2427,1 417,6 6165 275,558 179,3 32,4 111,0 2427,1 417,6 6165 275,558 179,3 32,4 111,0 2427,1 417,6 6165 275,588 159,4 63,1 108 IN HELTOCENTRIC ORBIT 1/64,7 511,9 6984 275,588 159,4 63,1 108 IN HELTOCENTRIC ORBIT 1/64,7 511,9 6984 275,588 159,4 63,1 108 IN HELTOCENTRIC ORBIT 1/64,7 511,9 6984 275,588 159,4 63,1 108 IN HELTOCENTRIC ORBIT 1/64,7 511,9 6984 275,588 159,4 63,1 108 IN HELTOCENTRIC ORBIT 1/64,7 511,9 6984 275,588 159,4 63,1 108	68 18 38 97,37 94,7 839,6 470,4 9237 275,574 8,0 209,5 100 43 41 48,52 98,2 728,7 616,4 9951 275,604 213,8 14,5 100 48 40 40 150 98,3 736,8 621,8 9937 275,546 222,6 344,9 100 57 12 22 97,35 94,7 537,2 467,4 9240 275,602 125,6 344,9 100 61 39 323 34,80 117,9 2417,2 755,5 721 275,56 175,3 46,9 110 62 4 39 323 34,80 117,9 2417,2 755,5 721 275,56 175,3 46,9 110 62 4 14 101 80,81 88,4 197,3 197,3 9216 275,56 179,5 145,6 102,5 140 63 14 101 80,81 88,4 197,3 197,3 9216 275,56 125,0 1102,5 100 64 59 6 50 12 48,5 0 7,9 703,0 619,4 1349 275,55 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 32,4 111,0 2127,1 417,6 6165 275,58 179,3 46,1 11,0 2127,1 417,6 6165 275,58 179,3 46,1 11,0 2127,1 417,6 6165 275,58 179,3 46,1 11,0 2127,1 417,6 6165 275,58 179,3 46,1 11,0 2127,1 417,6 47,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,6 4165 275,58 179,3 46,1 11,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 417,0 2127,1 4	43 18 38 97,37 94,7 539,6 470,4 9237 275,574 8,0 209,5 100 43 14 48,52 98,2 726,8 621,8 9937 275,514 213,8 14,5 100 43 42 222 97,35 94,7 537,2 467,4 9240 275,514 223,8 14,5 100 43 32 37,39 117,9 2417,2 755,5 723,5 275,514 219,4 100 64 39 32 37,20 117,9 2417,2 755,5 723,5 275,514 219,4 100 64 139 323 37,20 117,9 2417,2 755,5 721 275,516 175,3 46,9 110 65 14 101 80,81 88,4 197,3 197,3 9216 275,516 175,3 46,9 110 65 15 15 15 15 15 15 15 15 15 15 15 15 15		9	. ທ		210		110.4	683		2 9 0 6	75.54	: -	,	0 7 7	
43 1 14 48:52 98:2 726:7 616:4 9951 275:614 213:8 144:5 000 48 440 50 48:50 98:3 726:8 621:8 9937 275:546 222:6 344:9 000 57 12 26 67:35 94:3 736:8 621:8 9937 275:546 222:6 344:9 000 51 39 323 32:80 117:9 2417.2 755:5 7235 275:56 175:3 46:9 10 52 14 101 80:81 88:4 197:3 197:3 9216 275:56 179:5 129:4 000 52 14 101 80:81 88:4 197:3 197:3 9216 275:56 179:5 170:5 100 50 12 12 80:81 80:91 11:0 2127.1 417:6 6165 275:55 179:3 32:4 111.0 2127.1 417:6 275:55 179:3 32:4 20:0 20:0 20:0 20:0 20:0 20:0 20:0 2	43 1 14 48.52 98.2 726.7 616.4 9951 275.614 213.8 144.5 .00 48 40 50 48.50 98.3 736.8 621.8 9937 275.546 222.6 344.9 .00 57 12 10.52 97.35 94.7 537.2 467.4 9240 275.546 222.6 344.9 .00 58 13 32.3 38.60 117.9 2417.2 755.5 7235 275.56 179.5 129.4 .00 64 39 323 38.60 117.9 2417.2 755.5 7215 275.56 179.5 129.4 .00 64 39 323 38.60 117.9 2417.2 755.5 7215 275.56 179.5 179.5 112 64 29 323 38.60 117.9 2417.2 755.5 7215 275.56 179.5 112.5 .00 65 -4 225 38.60 117.9 2417.2 755.5 7215 275.56 179.5 112.5 .00 65 -50 10 10.81 10.81 10.81 11.0 2127.1 417.6 6165 275.55 179.3 32.4 .11.1 1.4 .1 .4 .1	43 1 14 48:52 98:2 726:7 616:4 9951 275:614 213:8 144:5 000 48 40 20 48:50 98:3 726:8 621:8 9937 275:546 222:6 344:9 000 57 12 250 48:50 98:3 736:8 621:8 9937 275:546 222:6 344:9 000 51 12 20 7.35 94:7 537:2 467:4 9240 275:560 222:6 344:9 000 52 4 225 38:30 117:9 2417.2 755:5 723 275:560 175:3 46:9 10 52 4 225 38:30 117:9 2417.2 755:5 723 275:560 175:3 46:9 10 52 4 101 80:81 80:4 497:3 197:3 9216 275:565 179:5 112:5 000 52 12 12 80:4 111:0 2127.1 417:6 6165 275:55 179:3 32:4 111 53 45 179:4 83:1 170 812.7 696:3 13185 275:568 109:5 98:6 000	43 1 14 48.52 98.2 726.7 616.4 9951 275.604 213.8 144.5 .00 48 40 50 48.50 98.3 736.8 621.8 9937 275.546 222.6 344.9 .00 57 12 18 62 97.35 98.2 75.8 621.8 9937 275.546 222.6 344.9 .00 58 13 32.3 38.50 117.9 2417.2 755.5 7235 275.56 179.5 129.4 .00 64 39 323 38.50 117.9 2417.2 755.5 721 275.56 179.5 179.5 112 64 39 323 38.50 117.9 2417.2 755.5 721 275.56 179.5 179.5 112 65 -4 225 38.50 117.9 2417.2 755.5 721 275.56 179.5 179.5 112 65 -4 225 38.50 113.6 2994.0 643.4 721 275.60 125.0 102.5 .00 64 101 10.81 10.81 11.0 2127.1 417.6 6165 275.55 179.3 267.0 .00 65 -50 338 28.50 111.0 2127.1 417.6 6165 275.55 179.3 32.4 .11 60 29 338 28.52 108.1 17.04.7 511.9 6984 275.58 179.3 32.4 .11 60 29 338 28.52 108.1 17.04.7 511.9 6984 275.58 159.4 63.1 .08 60 29 45 45 6 6 16 6 70.8 17.0 698.7 13185 275.54 109.5 98.6 .00		7.0	•	18	(C)		94.7	539		9237	75.57		00	500	
48 40 50 40.50 90.3 736.8 621.8 9937 275.546 222.6 344.9 00 57 12 222 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 00 1 NHELTOCENTRIC ORBIT 52 -4 225 38.05 118.6 2894.0 643.4 7211 275.565 179.5 146.9 140 81 14 101 80.81 88.4 197.3 197.3 9216 275.565 179.5 146.9 140 82 14 201 80.81 88.4 197.3 197.5 9216 275.565 179.5 102.5 10 82 14 101 80.81 88.4 197.3 197.5 9216 275.565 179.5 102.5 10 83 15 15 15 15 15 15 15 15 15 15 15 15 15	48 440 50 48.50 98.3 736.8 621.8 9937 275.546 222.6 344.9 000 57 12 22 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 000 61 39 323 38.40 117.9 2417.2 755.6 7235 275.58 175.3 46.9 110 62 -4 225 38.05 118.6 2894.0 643.4 7211 275.565 179.5 34.5 110 62 -4 225 38.05 118.6 2894.0 643.4 7211 275.565 179.5 34.5 110 63 14 101 80.81 88.4 197.3 197.3 9216 275.562 125.0 102.5 100 64 15 12 48.5 17.2 96.8 7.2.9 7.03.0 619.4 13.49 275.555 122.0 58.5 102.4 267.0 102.5 100 65 22 168 51.26 96.8 7.2.9 7.03.0 619.4 13.49 275.558 179.3 32.4 111.0 2127.1 417.6 6155 275.558 179.3 32.4 111.0 2127.1 417.6 6165 275.588 159.4 63.1 108 65 29 338 28.2 108.1 17.0 4.7 511.9 6984 275.588 159.4 63.1 108 66 29 38 45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 100	48 40 50 48.50 98.3 735.8 621.8 9937 275.546 222.6 344.9 100 12 22 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 100 12 22 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 100 12 117.9 2417.2 755.4 721 275.56 179.5 179.5 146.9 110 22 12 117.9 2417.2 755.4 721 275.56 179.5 179.5 146.9 110 22 12 117.0 117.9 2417.2 755.4 721 275.56 179.5 179.5 146.9 110 22 12 117.0 117.	48 440 50 48.50 98.3 736.8 621.8 9937 275.546 222.6 344.9 100 57 12 22 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 100 61 39 323 38.80 117.9 2417.2 755.5 7235 275.56 175.5 34.9 100 62 -4 225 38.89 118.6 2894.0 643.4 7211 275.56 179.5 34.5 110 62 -4 225 38.89 118.6 2894.0 643.4 7211 275.56 179.5 34.5 110 63 14 10.1 80.81 88.4 197.3 197.3 9216 275.56 179.5 34.5 112 64 51.26 96.8 7.22 778.6 13396 275.55 172.0 58.5 102			•	, •	•		08.0	728.7		9951	75.60	,	4	8	
### 12 222 97.35 94.7 937.2 467.4 9240 275.602 8.1 219.4 0.00	FY 12 222 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 .00 IN HELIOGENTRIC ORBIT 52 34.5 112, 22 97.35 34.7 112, 2417.2 755.5 7235 275.587 175.3 46.9 110 62 -4 225 34.95 118.6 2894.0 643.4 7211 275.565 179.5 34.5 112 61 14 101 80.81 88.4 197.3 197.3 9216 275.562 125.0 102.5 102 FOSITION UNCERTAIN 49 -52 12 48.50 97.9 703.0 613.4 1349 275.559 179.3 32.4 111.0 2427.1 417.6 6165 275.559 179.3 32.4 111.0 2427.1 417.6 6165 275.559 179.3 32.4 111.0 2427.1 417.6 6165 275.559 179.3 32.4 111.0 2427.1 417.6 6165 275.558 179.3 26.6 110.0 20.0 20.0 20.0 20.0 20.0 20.0 20.	FY 12 222 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 .00 IN HELTOGENTRIC ORBIT 5.3 38.05 118.6 117.9 2417.2 758.5 7215 275.587 179.5 34.5 112 6.4 22 38.05 118.6 2294.0 643.4 7211 275.565 179.5 34.5 112 6.5 -4 225 38.05 118.6 22994.0 643.4 7211 275.565 179.5 34.5 112 6.5 -4 101 80.81 88.4 197.3 197.3 9216 275.602 125.0 102.5 100 6.5 -4 101 80.81 88.4 197.3 197.3 9216 275.662 125.0 102.5 100 6.5 -4 101 80.81 88.4 197.3 197.3 9216 275.662 125.0 102.5 100 6.5 -4 101 80.81 88.4 197.3 197.3 9216 275.655 179.5 102.5 100 6.5 -4 101 80.81 88.4 17.2 197.3 13396 275.555 179.5 102.5 100 6.5 -4 101 80.81 11.0 2127.1 417.6 6165 275.558 179.3 32.4 111 6.5 -4 101 80.81 11.0 2127.1 417.6 6165 275.588 179.3 32.4 111 6.5 -4 101 80.81 1 1.0 2127.1 417.6 6165 275.588 179.3 32.4 111 6.5 -4 101 80.81 1 1.0 2127.1 417.6 6165 275.588 179.3 32.4 111 6.5 -4 101 80.81 1 1.0 2127.1 417.6 6165 275.588 179.3 98.6 100 6.5 -4 101 80.81 1 1.0 212.7 696.3 13185 275.548 109.5 98.6 100	FY 12 222 97.35 94.7 537.2 467.4 9240 275.602 8.1 219.4 .00 1		1	4	4			98	736.8	:	2866	75.54		4	800	
IN HELTOCENTRIC ORBIT 61 39 323 34.80 117,9 2417,2 755,5 7235 275,567 175,3 46,9 10 62 14 101 80.81 18,6 2894.0 643.4 721 275,567 179,5 34,5 12 61 14 101 80.81 88,4 197,3 197,3 9216 275,602 125,0 102,5 10 62 14 101 80.81 88,4 197,3 197,3 9216 275,602 125,0 102,5 10 63 14 101 80.81 88,4 197,3 197,3 9216 275,567 125,0 102,5 10 64 102 12 96,8 111,0 2127,1 417,6 6165 275,559 179,3 32,4 11,1 10 65 12 12 12 11,0 2127,1 417,6 6165 275,558 179,3 32,4 11,1 10 66 12 12 12 12 11,0 2127,1 417,6 6165 275,558 179,3 32,4 11,1 11 67 12 12 12 12 12 12,2 108,1 1,04,7 511,9 6984 275,588 159,4 63,1 108 68 179 48,11 99,9 812,7 696,8 13185 275,548 109,5 98,6 100	IN HELTOCENTRIC ORBIT 61 39 323 38.80 117,9 2417,2 755.5 7235 275.567 1/5.3 46,9 110 62 14 101 80.81 88,4 197.3 197.3 9216 275.602 129.5 112 63 14 101 80.81 88,4 197.3 197.3 9216 275.602 125.0 102.5 10 64 14 101 80.81 88,4 197.3 197.3 197.3 9216 275.602 125.0 102.5 10 65 15 15 15 15 15 15 15 15 15 15 15 15 15	IN HELTOCENTRIC ORBIT 61 39 323 34.80 117,9 2417,2 755,5 7235 275,567 175,3 46,9 10 62 14 101 80.81 18,6 2894,0 643,4 721 275,567 179,5 34,5 12 61 14 101 80.81 88,4 197,3 197,3 9216 275,602 125,0 102,5 10 62 14 101 80.81 88,4 197,3 197,3 9216 275,602 125,0 102,5 10 63 14 101 80.81 88,4 197,3 197,3 9216 275,567 125,0 102,5 10 64 18 18 18 18 18 18 18 18 18 18 18 18 18	IN HELTOCENTRIC ORBIT 51 39 323 38.50 117,9 2417,2 755.5 7212 275.567 1/5.3 46,9 110 52 4 22 38.50 118.6 2994.0 643.4 721 275.567 179.5 34.5 112 52 14 101 80.81 88.4 197.3 197.3 9216 275.602 129.5 1102.5 110 52 14 101 80.81 88.4 197.3 197.3 9216 275.602 129.5 1102.5 110 53 55 55 55 55 55 55 55 55 55 55 55 55 5		040	N.	4.5	222		04.7	537.2		9240	75.60	8	0	200	
61 39 323 38 80 1179 2417.2 755.5 7235 275.56 1/5.3 46.9 110 62 -4 225 38 95 118.6 2994.0 643.4 7211 275.56 179.5 34.5 125 61 101 80.81 80.84 197.3 197.3 9216 275.66 125.0 102.5 10 POSITION UNCERTAIN 49 -52 126 125.0 102.5 10 50 12 12 48.50 7.3 197.3 197.3 9216 275.55 125.0 102.5 10 41 -40 187 50.48 111.0 2127.1 417.6 6165 275.55 179.3 32.4 111 60 29 318 28.2 108.1 1/64.7 511.9 6984 275.55 179.3 32.4 111 IN HELIOGENTRIC ORBIT IN HELIOCENTRIC ORBIT IN HELIOCENTRIC ORBIT 35 -45 179 48.16 99.9 112.7 696.5 13185 275.548 109.5 98.6 100	61 39 323 38 80 117,9 2417,2 755,5 7235 275,567 1/5,3 46,9 110 62 44 225 58,05 118,6 2894,0 643,4 7211 275,565 179,5 34,5 112 110 10.81 80,81 80,44 89,73 197,3 9246 275,662 125,0 102,5 100 1025 110 UNCERAIN POSITION UNCERTAIN 72,9 778,5 13396 275,55 175,0 102,5 104 110 110 110 110 110 110 110 110 110	61 39 323 38 80 1179 2417.2 755.5 7235 275.58/ 1/5.3 46,9 110 62 -4 225 38 95 118,6 2994.0 643.4 7211 275.567 179.5 34,5 122 62 -4 225 38 95 118,6 2994.0 643.4 7211 275.567 179.5 34,5 112 60 10 10 10 10 10 10 10 10 10 10 10 10 10	61 39 323 38 80 1179 2417.2 755.5 7235 275.587 1/5.3 46.9 110 62 -4 225 58.05 118.6 2894.0 643.4 7211 275.565 179.5 34.5 112 61 14 101 B0.81 B8.4 8.97.3 197.3 9216 275.662 125.0 102.5 10 62 17 60.81 11.0 10.81 11.0 11.0 11.0 11.0 11.0				•	HELI	CENTRI	ORBI			•					
62 -4 225 38.09 118.6 2994.0 643.4 7211 275.565 179.5 34.5 112 81 14 101 80.81 88.4 197.3 197.3 9216 275.602 125.0 102.5 10 POSITION UNCERTAIN 49 =52 168 51.26 96.8 762.9 178.6 13396 275.555 152.0 58.5 101 50 =50 12 48.50 97.9 703.0 619.4 1349 275.555 152.0 58.5 101 41 =40 187 50.48 111.0 2127.1 417.6 6165 275.555 179.3 32.4 111 60 29 38.92 108.1 1/04.7 511.9 6984 275.588 179.3 32.4 111 IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 35 =45 179 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 100	62 -4 225 38.09 118.6 2894.0 643.4 7211 275.565 179.5 34.5 112 112 80.81 88.4 197.3 197.3 9216 275.602 125.0 102.5 0.00 POSITION UNCERTAIN POSITION UNCERTAIN 7.2.9 178.6 13396 275.555 122.0 58.5 0.01 50.8 111.0 21.2.0 613.4 13.49 2.75.555 122.0 267.0 102.5 0.01 41 44 40 187 29.4 111.0 2127.1 417.6 6165 275.558 179.3 32.4 111.0 2.0 318.1 11.0 618.4 17.4 511.9 6984 275.588 159.4 63.1 0.08 IN MELIOGENTRIC ORBIT 1.04.7 511.9 6984 275.588 159.4 63.1 0.08 179.4 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 0.00	62 -4 225 38.09 118.6 2894.0 643.4 7211 275.565 179.5 34.5 172.5 00.81 80.4 197.3 197.3 9216 275.602 125.0 102.5 100 00.81 80.4 197.3 197.3 9216 275.602 125.0 102.5 100 00.81 80.4 197.3 197.3 9216 275.562 125.0 102.5 100 00.81 80.8 19.8 19.8 19.8 19.8 19.8 19.8 19.8 19	62 -4 225 38.09 118.6 2894.0 643.4 7211 275.565 179.5 34.5 112 61 14 101 80.81 88.4 197.3 197.3 9216 275.602 125.0 102.5 100 POSITION UNCERTAIN 40 -52 168 51.26 96.8 7.52.9 178.6 13396 275.555 122.0 58.5 101 50 12 48.51 11.0 613.4 11.49 275.558 122.0 267.0 101 41 -40 187 29.4 111.0 613.4 114.9 6984 275.588 129.4 11.0 101 IN HELIOGENTRIC ORBIT 1.04.7 511.9 6984 275.588 129.4 63.1 108 IN HELIOGENTRIC ORBIT 1.04.7 511.9 6984 275.588 129.4 63.1 108 39 -45 179 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 100		184	•		323	2	117.9	417.	55	7235	75.58	,5	ç	0	
81 14 101 80.81 884 197.3 197.3 9216 275.602 125.0 102.5 100 POSITION UNCERTAIN 40 *52 168 51.26 95.8 7.2.9 778.6 13396 275.555 122.0 58.5 .01 41 *40 187 50.48 111.0 2127.1 417.6 6165 275.559 179.3 32.4 111 60 2.87.1 417.6 6165 275.559 179.3 32.4 111 60 2.87.1 417.6 6165 275.558 179.3 32.4 111 60 2.87.1 417.6 6165 275.558 179.3 32.4 111 60 2.87.1 417.6 6165 275.558 179.3 32.4 111 60 2.87.1 417.6 6165 275.568 179.3 32.4 111 60 2.87.1 417.6 6165 275.568 179.3 92.4 63.1 33.8 45 179.4 68.1 99.9 812.7 696.5 13185 275.548 109.5 98.6 .000	81 14 101 80,81 88,4 197,3 197,3 9216 275,602 125,0 102,5 .00 POSITION UNCERTAIN 49 -52 168 51,26 95,8 73,9 703,0 615,4 1349 275,555 122,0 58,5 .01 41 -40 187 50,48 111,0 2127,1 417,6 6165 275,555 179,3 32,4 .11 50 338 28,02 108,1 1/64,7 511,9 6984 275,588 159,4 63,1 .08 IN HELIOCENTRIC ORBIT IN HELIOCENTRIC ORBIT 35 -45 179 48,16 99,9 812,7 696,3 13185 275,548 109,5 98,6 .00	## 101 #0.81 #89.4 £97.3 197.3 9216 275.602 125.0 102.5 .00 POSITION UNCERTAIN 49 #52 168 51.26 95.8 732.9 778.5 13396 275.555 122.0 58.5 .01 41 #40 187 50.48 111.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 60 29 275.559 179.3 32.4 .11 1N HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 35 #45 179 48.16 99.9 #12.7 696.3 13185 275.548 109.5 98.6 .00	## 101 #0.81 #89.4 £97.3 197.3 9216 275.602 125.0 102.5 .00 POSITION UNCERTAIN 49 *52 168 21.26 95.8 7.2.9 478.6 13396 275.559 122.0 58.5 .01 41 *40 187 50.48 111.0 2127.1 417.6 6165 275.559 179.3 32.4 .11 50 *50 *50 *50 *50 *50 *50 *50 *50 *50 *		80	•		225		118.6	\$94.		7211	75.56	79.		2	
POSITION UNCERTAIN 49 -52 12 51.26 96.8 7.2.9 778.5 13396 275.555 122.0 58.5 .014 50 -50 12 48.50 97.9 703.0 615.4 1.449 275.555 302.8 267.0 .00 41 -40 187 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 50 29 338 28.22 108.1 1.04.7 511.9 6944 275.588 159.4 63.1 .08 IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .000	POSITION UNCERTAIN 49 -52 168 51.26 96.8 7.2.9 178.6 13396 275.555 122.0 58.5 .01 41 -40 167 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 60 29 338 28.02 108.1 1/64.7 511.9 6984 275.558 159.4 63.1 .08 IN HELIOCENTRIC ORBIT A HELIOCENTRIC ORBIT 39 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	POSITION UNCERTAIN 49 -52 128 12.26 96.8 7.2.9 778.5 13396 275.555 122.0 58.5 .014 50 -50 12 48.50 97.9 703.0 615.4 1.349 275.555 302.8 267.0 .00 41 -40 187 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 50 29 338 2822 108.1 1/04.7 511.9 6984 275.588 159.4 63.1 .08 IN HELIOGENTRIC ORBIT IN HELIOCENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .000	POSITION UNCERTAIN 49 -52 168 51.20 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		88.0	•		101		88.4	197	97.	9216	75.60	25.	2	0	
## #52 168 51.26 96.8 7.52.9 178.5 13395 275.555 152.0 58.5 .01	## ## ## ## ## ## ## ## ## ## ## ## ##	## #52 168 51.26 96.8 7.22.9 178.5 13395 275.555 152.0 58.5 .01	## ## ## ## ## ## ## ## ## ## ## ## ##		4		i	-	TON UN	FRTAT				•		i	•	
49 =52 168 51,26 96.8 742.9 478.6 13396 275.555 152.0 58.5 .01 50 =50 12 48.50 97.9 703.0 619.4 1449 275.555 302.8 267.0 .00 41 =40 10 10 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11 60 29 38 28.02 108.1 1/64.7 511.9 6984 275.588 159.4 63.1 .08 IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 35 =45 179 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 .00	49 =52 168 51,26 96,8 752,9 478,6 13396 275,555 152,0 58,5 01 50 =50 12 48,50 97,9 703,0 615,4 1549 275,555 302,8 267,0 .00 41 =40 187 50,48 111,0 2127,1 417,6 6165 275,558 179,3 32,4 .11 60 29 338 28,52 108,1 1/64,7 511,9 6984 275,588 159,4 63,1 .08 IN MELIOGENTRIC ORBIT AN HELIOGENTRIC ORBIT 39 =45 179 48,16 99,9 812,7 696,3 13185 275,548 109,5 98,6 .00	49 -52 168 51,26 96.8 742.9 478.6 13396 275.555 122.0 58.5 .01. 50 -50 12 48.50 97.9 703.0 619.4 144.9 275.555 302.8 267.0 .00. 41 -40 167 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 .11. 60 29 338 28.02 108.1 1/04.7 511.9 6984 275.588 159.4 63.1 .08 IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 39 -45 179 48.16 99.9 812.7 698.3 13185 275.548 109.5 98.6 .00	40 =52 168 51,26 96,8 752,9 178,6 13396 275,555 152,0 58,5 01 50 =50 12 48,50 97,9 703,0 615,4 1349 275,555 302,8 267,0 ,00 41 =40 187 50,48 111,0 2127,1 417,6 6165 275,558 179,3 32,4 111 60 29 29,52 111,0 1 1,04,7 511,9 6984 275,588 159,4 63,1 ,08 IN HELIOGENTRIC ORBIT IN HELIOGENTRIC ORBIT 35 =45 179 48,16 99,9 812,7 696,3 13185 275,548 109,5 98,6 ,00		80			ш	NON	FRTAT								
## ## ## ## ## ## ## ## ## ## ## ## ##	## ## ## ## ## ## ## ## ## ## ## ## ##	## ## ## ## ## ## ## ## ## ## ## ## ##	## ## ## ## ## ## ## ## ## ## ## ## ##		0	•	.52	4.68	51.26	9	\$25	78.	339	75.55	50.	ď	•	
44 #40 187 20.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 111.0 60.0 29 338 28.02 108.1 1.04.7 511.9 6984 275.588 159.4 63.1 108. IN MELIOGENTRIC ORBIT 1.04.7 511.9 698.4 275.588 159.4 63.1 108.5 109.5 98.6 98.6 109.5 98.6 98.6 109.5 98.6 98.6 98.6 98.6 98.6 98.6 98.6 98.6	41 =40 187 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 111.0 60 29 338 28.02 108.1 1704.7 511.9 6984 275.588 159.4 63.1 .08 IN HELIOGENTRIC ORBIT IN HELIOCENTRIC ORBIT 39 =45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	41 #40 187 20.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 111.0 29 338 28.02 108.1 1.04.7 511.9 6984 275.588 159.4 63.1 .08 IN MELIOGENTRIC ORBIT IN MELIOCENTRIC ORBIT 39 #45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	41 -40 187 50.48 111.0 2127.1 417.6 6165 275.558 179.3 32.4 111.0 60 29 338 28.02 108.1 17.4.7 511.9 6984 275.588 159.4 63.1 .08 IN MELIOCENTRIC ORBIT IN MELIOCENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00			* **	1 6	•		0.70				75.57			1 0	
41 =40 187 50.48 111.0 2127.1 417.6 6165 275.58 179.3 32.4 111.0 60 29 20.02 11.01.0 63.1 .01.0 60 29 10.0 11.0 63.1 .01.0 60 20 10.0 11.0 63.1 .01.0 60 20 10.0 11.0 11.0 11.0 11.0 11.0 11.0	41 =40 187 50.48 111,0 2127.1 417.6 6165 275.558 179.3 32.4 111.60 29 35 2 20.48 111.0 2127.1 417.6 6984 275.588 159.4 63.1 .08 IN WELLOGENTRIC ORBIT 1.04.7 511.9 6984 275.588 159.4 63.1 .08 IN WELLOGENTRIC ORBIT 1.04.7 696.3 13185 275.548 109.5 98.6 .00	41 =40 187 50.48 111.0 2127.1 417.6 6165 275.58 179.3 32.4 .11 60 29 2 108.1 1/64.7 511.9 6984 275.588 159.4 63.1 .08 IN WELIOGENTRIC ORBIT IN WELLOGENTRIC ORBIT 35 =45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	41 =40 187 50,48 111,0 2127,1 417,6 6165 275,588 179,3 32,4 111,60 29 20,22 108,1 1/64,7 511,9 6984 275,588 159,4 63,1 .08 IN HELIOGENTRIC ORBIT IN HELIOCENTRIC ORBIT 39 =45 179 48,16 99,9 812,7 696,3 13185 275,548 109,5 98,6 .00		11	,) (4 6			2 5	•	,		9 6	: ,	, ,	
00 29 338 28,02 108,1 1,04,7 311.9 0964 2/5,380 129,4 03,1 .08 IN HELIOGENFRIC ORBIT IN HELIOGENFRIC ORBIT 35 45 179 48,16 99,9 812.7 696.3 13165 275,548 109.5 98.6 .00	50 29 338 28,52 108,1 1/04,7 511.9 0964 2/5,580 129,4 03,1 .08 IN MELIOGENTRIC ORBIT 39 45 179 48,16 99,9 812,7 696,3 13185 275,548 109,5 98,6 .00	00 29 358 28,22 108,1 1/04,7 311,9 0964 2/5,580 129,4 03,1 .08 IN HELIOGENTRIC ORBIT IN HELIOCENTRIC ORBIT 35 45 179 48,16 99,9 812.7 696.3 13165 275,548 109,5 98,6 .000	00 29 358 28,02 108,1 1/04,7 511.9 0964 2/5,580 129,4 03,1 .08 IN MELIOGENTIC ORBIT IN MELIOGENTRIC ORBIT 35 -45 179 48,16 99,9 812.7 696.3 13165 275,548 109,5 98,6 .00		6	•		101		1110	16/		9	20.07		Ž,	н,	
IN MELIOGENTRIC ORBIT IN MELIOGENTRIC ORBIT 39 -45 179 48,16 99,9 812,7 696.3 13185 275.548 109.5 98.6 .00	IN MELIOGENTRIC ORBIT IN MELIOCENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	IN MELIOGENTRIC DRBIT IN MELIOCENTRIC ORBIT 35 .45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .000	IN MELIOGENTRIC ORBIT IN MELIOGENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00		101	•	6		0 0 0	108,1	/64.	=	9	75.58	59.	'n	œ	
IN MELIOGENTRIC ORBIT 39 -45 179 48,16 99,9 812,7 696.3 13185 275,548 109,5 98,6 .00	IN MELIOGENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00	IN MELIOCENTRIC ORBIT 39 -45 179 48,16 99,9 812,7 696.3 13185 275.548 109.5 98.6 .00	IN MELIOGENTRIC ORBIT 35 -45 179 48.16 99.9 812.7 696.3 13185 275.548 109.5 98.6 .00		112		••	HELI	CENTR	ORBIT								
55 -45 179 48.16 99.9 812./ 678.5 15185 2/5.546 104.5 98.5 .00	35 -45 179 48,16 99,9 812./ 698.3 13185 6/5,548 109.9 98.5 .00	59 **9 1/0 48,15 99,4 812./ 698.5 15185 6/5,540 104.9 48.5 .00	35 -45 179 48.16 99,9 812./ 698.3 13185 6/5.548 109.5 98.5 .00		113	•		HELI	CENTR	ORBIT	(,	,	1	6	,		
	i	7	2		1	•		179		6.66	77	•	10 10 10	75.54	5	80	6	

REDUCT

(Nodal Crossing Reduction)

INPUT DECK:

Manual Schedule Tape Mode

INPUT DATA:

The first card of the input data is an option switch card controlling the processing and the output. This card is followed by the standard element sets, station cards (if any), and observation cards, with each group preceded by a lead card.

The deck should be in the following order:

- 1. Option Switch card:
 - Col. 1: a numeric punch (1-9) will cause the Station Tape (logical 7) to be inhibited.
 - Col. 3: a numeric punch, (1) inhibits the interim tape (logical 8), (2) eliminates tolerance limit tests.
 - Col. 8: a numeric punch causes all observations

 to be treated as unknowns, reducing
 all against the available element
 sets.
 - Col. 9: a numeric punch modifies headings, spacings, and format length to allow subsequent processing by TELTYP to obtain output for teletype transmission.
 - Col.10: a numeric punch eliminates a re-reduction of unknown obs. which have remained untagged after a reduction against the selected tolerance limits. If the re-reduction is not eliminated, the untagged obs., which have been written out on the interim tape, are tested against open tolerance limits (Δt=99.0 days, ΔRA=15.0 degrees, Δh = 99999.0 kilometers).

Col.11: a numeric punch directs the program to use the perigee distance (q term) of the element cards. If this term is not used, perigee distance will be computed by the formula: q = a (1-e).

- 2. Element lead card: a 7 punch in col. 8.
- 3. Standard 6 or 7 card element sets (up to 250).
- 4. Station lead card: a 9 punch in col. 8.
- 5. Standard station cards (up to 750).*
- 6. Observation lead card: and 8 punch in col. 8 with the tolerance limit key punched in col. 7:

	Tole	rance Table	
Col. 7	∆t, in days	ΔRA, in degs.	Δ H, in kms.
0 or blank	.002	20.0	200
1	1.0	5.0	500
2	.003	360.0	10000
3	.002	360.0	10000
4	.001	360.0	10000
5	.003	5.0	300
6	. 05	2.5	200

- 7. Observation cards (any number).
- 8. A blank card to terminate the preceding group. group of observation cards.
- 9. End of input card: a 9 punch in col. 79.
- * The Station Tape (logical 7) may be used in place of, or in addition to, the card groups 4 and 5.
- ** Observation lead cards (any number) may be inserted to vary the tolerance limits applied to the reduction of the following observation cards.

OUTPUT:

Output begins with the satellite inventory. Seven groups, composed of satellite number and element number, are printed per line.

The next output is the satellite number (first line), selected elements (two lines), and the tolerance limits used in the observation output following (one line).

Observation output will occur in one of three formats, depending on which part of the program has done the reduction, as in the following table:

General Reduction Output:

ID = 16 digit observation identification number comprised of the satellite number, the last digit of year of observation, month day, hour, minute, seconds, and hundreths of seconds.

N = Epoch revolution number

U = Argument of latitude of satellite in orbit plane

T SUB N = Computed time of nodal crossing

DELTA T = Time residual in days (difference between predicted and observed)

PHIS = Computed latitude of subsatellite point

LS = Longitude of subsatellite point

RA N = Right ascension of ascending node in degrees

DEL RA = Right ascension residual (difference between predicted and observed)

H(KM) = Height in kilometers

DEL H = Height residual (difference between predicted and observed)

TYPE = VIS for visual observations

RDR for radar observations

B-N for Baker-Nunn observations

ELEM = Element number

STA = Station number

Doppler Reduction:

ID = Observation identification

N = Epoch revolution number

T SUB N = Computed time of nodal crossing

DELTA T = Time residual in days (difference between predicted and observed)

D = Arc distance in nautical miles from station to subsatellite point.

H = Elevation, in degrees

S = Slant range, in kilometers

ELEM = Element number

STA = Station number

Direction Finder Reduction:

ID = Observation identification

N = Epoch revolution number

T SUB N = Computed time of nodal crossing

DELTA T = Time residual in days (difference between predicted and observed)

H = Elevation, in degrees

S = Slant range, in kilometers

H(KM) = Object height, in kilometers

ELEM = Element number

STA = Station number

If the output is to be processed by TELTYP for teletype transmission, a modified version of the above output will be printed. In general, each line, as described above, will be broken into two lines of output. Each line will be followed by an asterisk (*), and the abreviation, DOP, for doppler observations, or DF, for direct finder observations will follow the station number.

```
JOB
                       REDUCTION TEST
               RUN
                       REDUCTB2, DATA
                                TOGGLE CARD
       11
      7
51 19 160 IOTA 3
                              2300.
                                      0.01095429
                                                   47 • 19999981
 51 19 21961
                      48.10885429
                                      1
                                                 48 • 10885429
                                                                             E.
 51 19 3
                       33.15050268 211.88786888 1.23742932
51 19 4
                        -3.08994973 2.97470850-0.
51 19 5-0.
                      5.3245170E-06-5.1259364E-06-0.
51 19 6
                     0.082U5393 5.0345715E-009
60 19 1 60 XI 1
                             1390.
                                     0.11134295
                                                   49.97599983
60 19 21961
                      50.94619608
                                      1
                                                  50.94619608
60 19 3 0.07820488 11.63639760 355.09534836
                                                     1.07672971
60 19 4-1.8607016E-08
                       -3.35409367
                                     2.78489476-0.
60 19 5-0.
                    -2.1083826E-05 1.7505843E-05-0.
60 19 6
    6 161 BETA 3
                                      0.00638922 64.88655853
73
                               200.
                      47.55804205 1961
 73
    6 21961
                                                  47.55804205
          0.06244039 143.76211357
 73
    63
                                     60•99729776
                                                     1.03565089
    6 4-7.4575213E-07
                       -3.65672696
                                     -0.42809739-0.
    6 5 0.
                     -1.6202050E-03-1.8967934E-04-0.
73
 73
    6 6 -0.
                       -0.
                                 -0
                                    -0•
                                                    -0.
                                                                    0 0
                                90•
    4 11961 GAMMA 3
 77
                                      0.00817470
                                                    65.01097775
                      48.61976957 1961
 77
    4 21961
                                                  48 • 61976957
          0.06208724 166.09534454 20.37677312
 77
                                                    1.02988344
    4 4-2.1226734E-06
                       -3.68851939
                                      -0.47019580-0.
    4 5-6.1808457E-09-4.6953070E-03-5.9853653E-04-0.
 77
 77
     4 6
          1.00000000 360.00001 -0 -0.
                                                    -0.
                                                                    0 0
      G
0039+276191+0993844
                     1950 5 003901LAREDO TEXAS
                                                       143
0135+512139+0008153
                     1100
                             013501FARNHAM ENGLAND
                                                       401
                      670 9 000201BILLERICA MASS
0002+425561-2886997
                                                       121
0300+107330+0616000
                     2135 510G3GOOOTRINIDAD
                                                       159
-582103000102210158270002900001680000018980
                                                     MSG 1
                                                             1877 -27-150-24
                                                             06878 35 -80-66
                                         0000000021000
   410002010208 22150000
                          0
   2103000102210159290003070001540000218520
                                                     MSG
   2103000102210159290003070001540000018520
                                                              1877 -21-130-24
315 57 15-8
                                                     MSG 2
0 42200390102231508495001070001403000008960
060 10135010220194245400397000-539060
                                                              1401 -16 -25-19
060 10135010220194245400397000-539060
                                                     010
                                                              1401 -16 -25-19
0732200390102231509360001070001403000011380
                                                               313 24 -33- 6
0732200390102231638410000
                            2555000018750
                                                               314
                                                                   30 -16- 6
0772200390102231655190001040001402000008540
                                                               188
                                                                    37
                                                                       -4- 4
     58
051 100690102230244223007158003600000
                                                              2373 -16 -4-19
   2103000102210159290003070001540000018520
                                                    MSG 2
                                                              1877 -21-130-24
051 100690102230244223007158003600000
                                                     030
                                                              2373 -16 -4-19
-51 100690102230244223007158003600000
                                                              2373 -16 -4-19
```

ENDDATA

ENDOFJOBR

0

SATELLITE INVENTORY FOLLOWS.*
51 19/ 60 19/ 73 6/ 77 4/
05810221 01582700 NO ELEMENTS IN SYSTEM(1).

30C*

1

```
UO S FULLOW*
UNK*******
                       6878
                              0 *
                2169 39.00631465 0.00538*
05110208 00221500
  1256. 21.81
                  3099.
                         19. 25 DOP*
                1267 39.00684022 0.02643*
06010208 00221500
                                52 DOP*
   824, 27,84
                  2022. 19.
                   63 38.99523414 0.00552*
07310208 00221500
                  7425. 6. 25 DOP*
  4179. -33.18
                  -65 38.99127295 0.02301*
07710208 00221500
                  5885
                          4.
  3216, -24,20
                                 28 DOP*
UNK********
                               M &
05110221 01592900 2348 225.08 52.03144556 +0.01601*
                286.79 -94.19 19322.3 17807.4 RDR
431,301 320,43
                                                     19.
                                                           300 a
                 1404 222./2 52.03242214 -0.00864*
06010221 01592900
                 290.35 -77.61 19322.3 17408.9 RDR
 -31.301 320.43
                                                     19.
                                                           300 *
                  272 324.99 52.02669415 -0.02319*
07310221 01592900
-31,301 320.43
                 157.62 30.31 19322.3 19057.3 RDR
                                                      6.
                                                           300 *
07710221 01592900
                 145 325.03 52.02714149 0.00002*
                 157.52 4.05 19322.3 19117.7 RDR
-31,301 320,43
                                                      4.
                                                           300 *
                       1877 - M*
UNK********
                2348 180.54 52.04140303 -0.00605*
05110221 01592900
 -0.394 303.74 304.01 -76.97 1116.7 -421.4 RDR
                                                     19.
                                                           300 *
06010221 01592900 1404 180.51 52.04354025 0.00248*
                304.04 : -63.92 1116.7 -1093.3 RDR
 *0.394 303.74
                                                     19.
                                                           300 *
                 272 359,56 52,02072186 -0.02916*
07310221 01592900
                124,56 -2.75 1116.7
                                         871.8 RDR
 -0.394 303.74
                                                           300 *
                                                      6.
07710221 01592900
                145 359,56 52,02126079 -0.00586*
 -0.394 303.74 124.56 -28.92 1116.7 923.7 RDR
                                                      4.
                                                           300 *
00410223 15084950 NO ELEMENTS IN SYSTEM(1)
                                                           39 ×
```

```
60* 1390 50.94620 0.078205 -0.186-007 0.000+000 1.21164 0.11134* 11.636 -3.354 -0.0000 355.095 2.785 0.0000 112.62 49.98*

* 0.00200 20.00000 200.00000*
06010220 19424540 1401 81.38 51.80628582 -0.00016* 49.214 359.07 8.50 -0.25 1176.3 0.0 VIS 19. 135 * 06010220 19424540 1401 81.38 51.80628582 -0.00016* 49.214 359.07 (0.50 -0.25 1176.3 0.0 VIS 19. 135 *
```

```
13* 47.55804 0.062440 -0.746-006 0.000+000 1.04231 0.00639*
143.762 -3.657 -0.0016 60.997 -0.428 -0.0002 89.91 64.89*

* 0.00200 20.00000 200.00000*

07310223 15093600 313 157.92 54.60451877 0.00024*
19.898 267.15 117.58 -0.33 305.6 38.2 RDR 6. 39 *

07310223 16384100 314 155.21 54.66685240 0.00030*
22.315 243.44 117.53 -0.16 270.1 4.2 RDR 6. 39 *
```

77*
90 48.61977 0.062087 -0.212-005 -0.618-008 1.03837 0.00817*
166.095 -3.689 -0.0047 20.377 -0.470 -0.0006 89.41 65.01*

*
0.00200 20.00000 200.00000*
07710223 16551900 188 155,88 54.67049040 0.00037*
21.739 265.66 143.54 -0.04 208.0 -7.6 RDR 4. 39 *
END OF BUN ************

ROC

(Radar Orbit Computation)

INPUT DECK: Manual Schedule Tape Mode

INPUT DATA: Two options for input are accepted by the program: 1) radar observations, 2) geocentric rectangular coordinates and velocities.

Option 1:

1. Request Card:

Col.	1-3	Number (odd) of
		observation cards to
		be read, from 3 to 999.
	6-17	Alphanumeric satellite
		name or identification,
		for output.
	18-35	Date of computation
	41	1 punch request ele-
		ment cards as output.
	42	l punch prints x, y, z,
		x, y, z for the mean of
		the observations.

72-80 Are blank

- 2. Standard Station Card
- 3. Standard Observation Cards, in order of increasing time. (any odd number from 3 to 999)
- 4. 9 punch in col. 79: card used to end data deck.

Option 2:

1. Request card:

Col.	6-17	Alphanumeric satellite
		name or identification
		for output.
	18-35	Date of computation
	41	l punch requests ele-
		ment cards as output
	72-80	Must be blank

2. Rectangular Coordinate Card:

Col. 1-14* x, in km.
15-28* y, in km.
29-42* z, in km.
43-46 Year of epoch

3. Velocity Component Card:

Col. 1-14* x, in km/sec.

15-28* y, in km/sec.

29-42* z, in km/sec.

43-56* Day of year of observation of coordinates

4. 9 punch in col. 79: card used to end data deck.

OUTPUT: The output consists of the normal Radar Orbit Computation plus two options as selected by the input request card.

The Radar Orbit Computation is comprised of headings (program title, station name, alphanumeric satellite identification, and the date) and output. Each datum of output follows its label: semi-major axis in km., earth radii, right ascension of ascending node in degrees, radius vector in km., eccentricity squared, nodal period in days and minutes, argument of perigee in degrees, velocity in km./sec., perigee distance in km. and in earth radii, time of last perigee pass in days, inclination in degrees, apogee in km. and earth radii, and the time of the last nodal crossing in days.

Output Option A, which is possible only with input option (1), produces a printing of the geocentric rectangular coordinates x, y, z (headed XX = , YY = , ZZ =) and the velocity components (headed XDER = , YDER = , ZDER =). The time of the observation is given under the heading TIME =.

^{*} The field must have a decimal punch.

Output Option B produces punched cards in the standard 6 card element set format. The data punched are the satellite number, element card number, satellite name, eccentricity, inclination, year of epoch, time of epoch, nodal period at epoch, right ascension, argument of perigee, and perigee distance. All other fields of the standard set are left blank.

If teletype transmission is desired, the program TELTYP may be used.

ROCE 2

```
111111111
                                                                                                                                                      34-59
                                                                                                                                                                               22-59
34-59
                                                                                                                                                                                                                    22-59
29-59
                                                                                                                                                                                                                                              26-59
27-59
28-59
                                                                                                                                                                                                                                                                                   21-59
                                                  38-59
                                                               16-59
                                                                            38-59
                                                                                        42-59
                                                                                                     18-59
                                                                                                                  31 - 59
                                                                                                                                                                    36-59
                                                                                                                                                                                                         26-59
                                                                                                                                                                                                                                                                                                            22-59
                                                                                                                              36-59
                                                                                                                                          20-59
                                                                                                                                                                                                                                                                                                                         20-59
                                                                                                                                                                                                                                                                                                                                                 22-59
                                                                                                                                                                                                                                                                                                                                                                12-59
                                                                                                                                                                                                                                                                                                25-59
                                                                                                                                                                                                                                                                                                                                      16-5
                                       -5179
-5179
                                                                                                                                                                                                                                -5179
                                                                                                                                                                  -5179
                                                                                                                                                                                                                                                         -5179
                                                                                                                                                                                                                                                                                              -5179
                                                                                                                                                                                                                                                                                                                                    -5179
                                                  -5179
                                                               -5179
                                                                          -5179
                                                                                       -5179
                                                                                                    -5179
                                                                                                                 -5179
                                                                                                                            -5179
                                                                                                                                          -5179
                                                                                                                                                      -5179
                                                                                                                                                                                                         -5179
                                                                                                                                                                                                                     -5179
                                                                                                                                                                                                                                                                       -5179
                                                                                                                                                                                                                                                                                  -5179
                                                                                                                                                                                                                                                                                                            -5179
                                                                                                                                                                                                                                                                                                                        -5179
                                                                                                                                                                                                                                                                                                                                                 -5179
                                                                                                                                                                                                                                                                                                                                                              -5179
                                                                                                                                                                                                                                                                                                                                                                          -5179
                          121
                       000101MILOSTONE MASS
                                   10317014434770 87700262300001217006602
                                                90000263100001182006608
                                                            10317014446710 98000264500001143006571
                                                                         10317014452560106400264900001098006510
                                                                                      10317014458350111700265600001063006540
                                                                                                                                                   10317014529010157600272000000872006009
                                                                                                                                                                                                                               10317014605640228000284500000670004926
                                                                                                                                                                                                                                            10317014611820241100287700000639004639
                                                                                                                                                                                                                                                                    10317014623780258800294400000587003948
                                                                                                                                                                                                                                                                                             10317014635960295100303000000544003103
                                                                                                                                                                                                                                                                                                          1031701464189030740030780000528002568
                                                                                                                                                                                                                                                                                                                      10317014648100320200313400000515001999
                                                                                                              10317014510920129800268200000982006312
                                                                                                                          10317014516880137300269100000948006224
                                                                                                                                                                10317014535240167300273600000833005873
                                                                                                                                                                             10317014541350178700275900000798005764
                                                                                                                                                                                         0317014547410190600277300000765005590
                                                                                                                                                                                                      103170145534702020000279700000732005392
                                                                                                                                                                                                                  10317014559600215700282300600700005167
                                                                                                                                                                                                                                                       10317014617850255200291000000611004316
                                                                                                                                                                                                                                                                                                                                  10317014654320331100319600600506001376
                                                                                                                                                                                                                                                                                                                                               0317014700330336000325500000496000746
                                                                                                                                                                                                                                                                                                                                                                       1031701471256033730033880000050000586
                                                                                                                                        10317614522980146100271000000909006121
                                                                                                                                                                                                                                                                                0317014629910282900298600000567003621
                                                                                                                                                                                                                                                                                                                                                           1031701470652033730033200060049600051
                                                                                                  1031701450472012050026740005102200637
ROCB2, DATA
            MARCH 17,1961
                        1560 5
                                                 10317014440290
                                                                                                                                                                                                                                                                                                                                                                                                 ENDDATA
                       0001+426175+0714922
                                    030210001
                                                             030210001
                                                 030210001
                                                                         030210001
                                                                                                                                                                             030210001
                                                                                                                                                                                                      030210001
                                                                                                                                                                                                                   030210001
                                                                                                                                                                                                                                           030210001
                                                                                                                                                                                                                                                                                                                                                                       330210001
                                                                                      030210001
                                                                                                   030216001
                                                                                                              630210001
                                                                                                                          030210001
                                                                                                                                        030210001
                                                                                                                                                  030210001
                                                                                                                                                                030210001
                                                                                                                                                                                         030210001
                                                                                                                                                                                                                              030210001
                                                                                                                                                                                                                                                         030210001
                                                                                                                                                                                                                                                                    030210001
                                                                                                                                                                                                                                                                                030210001
                                                                                                                                                                                                                                                                                              030210001
                                                                                                                                                                                                                                                                                                         030210001
                                                                                                                                                                                                                                                                                                                      030210001
                                                                                                                                                                                                                                                                                                                                   030210001
                                                                                                                                                                                                                                                                                                                                               030210001
                                                                                                                                                                                                                                                                                                                                                            030210001
                                                                                                                                                                                                                                                                                                                                                                                                             ENDOFJOBR
```

		APOGEE KM 362,98251900 EARTH RADII 1,056910100	TIME OF NODE DAYS 76,062922770		
		PERIGEE 274.090458100 EARTH RADII 1.042973186	TIME OF PERIGEE DAYS 76,014993400	INCLINATION DEGREES 51.470701640	·
SATELLITE NO: 0	JR MARCH 17,1961	PERIOD DAYS 0.063122711 HINUTES 90.896704110	ARGUMENT OF PERIGEES DEGREES 87.409955800	VELOCITY KM7SEC 7.761152966	ECCENTRICITY SOUARE U.000044050
SATEII TE ROC TEST	THE BELOW INFORMATION COMPUTER FOR	SEMI~MAJOR AXIS KM 6696.710489300 EARTH RADII 1.049941643	RIGHT ASCENSION DEGREES 73.093154430	FADIUS VECTOR KM 6656.862551000	ECCENTRICITY 0.006636994

MILLSTONE MASS

RADAR OREIT COMPUTATION

LOCVEC

(Vector Coordinates for Lockheed)

INPUT DECK: M	Manual S	Schedule	Tape	Mode
---------------	----------	----------	------	------

INPUT DATA: (1)

(1) Request cards - as many as required up to 500.

cols. 1-3

SPADATS sat. no.

cel. 9

a) 1st digit of STC sat. no.

b) 9 if SPADATS sat. no. used

cols. 10-12

Sat. no.

cols. 13-20

Name of sat. (alphanumeric)

cols. 21-24

Country of origin

- (2) Col. 8 a numeric punch (1-9) which signals the end of the request deck.
- (3) Standard six or seven card element sets. Up to 500 sets can be read into core.
- (4) One blank card terminates the element card read in process.

OUTPUT:

Logical tape 11 contains x, y, z in feet and x, y, z, in ft/sec. to be printed. Five-channel paper tape is available for teletype transmission to the CDC 1604 computer at Sunnyvale Tracking Center.

ини и ини

0

66.814169118 287.584307021 1.136606549 .0090423448 35.386727540 •0721074839-•5262754886-9 543920725222037-51 LOCVECB2 LOCVECB2,DATA 1610MICR 1 5090 21962 1869668783 3 •0720975323 286•999153555 4-•1267486414-9 -2•426967596 JOB L RUN L 1.1469779291 9116 61 9 6 23.7 23.7 24.7 37 37 37 116 116 116 116 116 116 116 116

ENDOFJOBR

ENUDATA

7/700T FT/FT/SEC 1262.08 Y/YD0T -22782710.69 2930.80 224 x/XDOT 6965570.16 9148.18 5096 VECTOR COORDINATES FOR LOCKHEED SAT STC ELE MO DA HR 116 9116 37 / 1 4 102553.937

CCOE

(Cartesian Coordinates from Orbital Elements)

INPUT DECK: Manual Schedule Tape Mode.

INPUT DATA: (1) Set of Standard Elements (6 or 7 cards).

(2) Request cards - as many as required:

Cols. 1 - 10: Start time (days of year).

11 - 20: Time increment (days of year).

21 - 30: End time (days of year).

31: Blank, output in kilometers per sec.

1, output in earth radii per min.

(3) One blank card

(4) The above may be repeated any number of times.

To terminate the program a second blank card
must be used.

OUTPUT:

Logical tape 11 contains the position and velocity components with the output in kilometers and kilometers per second or in earth radii and earth radii per minute. The information is in order of increasing time (in days) for each time step during the range requested.

/	_				-		_													_																																																													
T	S	T	AR	T	(0	ΙÝ	S)	Τ		T	IM	ΙE	: 1	([À	Y	S)	T	T	\$1	ΓÚ	p	(D4	۱Y	S))	f	F	1 -	- F	RA	DI	١,	В	L	- 1	M	<u> </u>	_				_				-			_	_				_	_	_	-								_									_		_	_
	0	0	0	ŋ	0	0) (0 () (0	0	0	0) () () (0 (0 (0 (1	0	0	0	0	0	0	0	0	0	0	à	ď	ď	ý	V	V	V	7	γ	7	ĭ	7	Q)	N.	Ŋ	Ų.	N	2	Ŋ	Z	Z	Ŋ	Ţ	Λį	Λį	Ź	И	И	Ó	Ø	þ	þ	A	b	Q	ý	V	ď	7	7	Ţ	ď	ø,	Z	ď,	Z,	I	T	1	7	7
	1	2	3	4	5	6	7	•	D- 14	11	12	2 1.3	3 14	6 1	5 1	6 i	7 1	8 1	19 2	8 2	1 22	23	24	25	26	21	26	29	30	31	¥	ij	Þ	£,	γ,	Ŋ	۴	γ	4	ď	ıγ	24	'nλ	4)	Ŕ)	é,	Ų)	١,	١,	١,	K)	K)	e p	é y	f)	١.	λ:	1,5	λeς	Y	1	4	4	þ	٧	Vi	γ,	/	þ	ķ	ķ	'n,	ķ	Þ	7	×	y	١,	ы,	1,	ľ,
	1	1	1	1	1	1	1	1	1	1	١	1	1	1	1	1	1	1	1 1	1	1	1	1	1	1	1	1	1	1	1	1	Á,	Y	ľ	١,	√1	1	V	N	/	//	Ŋ	(\	()	١)	()	(\	()	()	ľ	()	(1	(1	(1	ľ	ľ	Ι,	1	1	1	1	Ą	Ų	Ų	Á,	Ų	V	V	y	V	V	Y	Y	A.	Y	Y	Z,	1	1,	Ι,	١
	2	2	2	2	2	2 :	2 :	2 .	٤ 2	2	2	2	2	! 2	2 2	2 2	2 :	2 :	2 2	2	2	2	2	2	2	2	2	2	2	2	ž	à	\ <u>2</u>	Z	12	V	18		$\langle \rangle$				1	\	1	λ	λ	$\langle x \rangle$	λ	λ'	<i>\$\</i>	$\langle \cdot \rangle$	V	$\langle \cdot \rangle$	$\langle \cdot \rangle$	$\langle \cdot \rangle$	$\langle \cdot \rangle$	<i>\$\</i>	13	8	18	\ 3	/3	>	\z	2	/>	/	/>	/2	/2	/2	\ 2	Š,	Ź	ħ,	þ	Ż,	Ý,	/	\
	3	3	3	3	3	3	3 ;	3 :	3 3	3	3	3	3	1 3	3 3	3 ;	3 :	3 :	3 3	1	3	3	3	3	3	3	3	3	3	3	3	3	13	B	/3	/3	()	1	1	N	<i>\</i>	/	3/	3/	1	1	\langle	٤)	/	1	١,	1	1/3			1	3		/3	4	13	B	3	3	Þ	४	1	8	1	8	13	13	3	3	8	'n	Z	z\	'n,	/	Ì
	4	4	4	4	4	4	4	4 (1 4	4	4	4	4	4	1 4	, 4	4 4	,	4 4	4	4	4	4	4	4	4	4	4	4	4	Ý	¥	4	ί,	1	Ņ	V	V	Ŋ	þ	1	Ŋ	Y,	Y,	V,	/	V,	À	V	1	Ŋ	V	Ŋ	Ŋ	V	6	Ò	1	¥	¥	Ì	ļ	<i>(</i>)	ĺ,	ĺ,	Ì	1	V	V	V	V	Ó	Þ	Ý	¥	Ý	Ý	Ŋ	ψ	/	Ì
	5	5	5	5	5	5	5 :	5 !	5 5	 - 5	5	i 5	5	; ;	5 5	; ;	5	5	5 !	,	i 5	5	5	5	5	5	5	5	5	5	ž	k,	\ 5	\ \\$	1	į			,	Y.	/	/	5	(5	5)	į)	5)	V.	/	$^{\prime}$	/		/	5 \	/	Ş	Ş	Ş	Ş	\ \	É	Þ	\	5	5	()	1		1	\ <u>\$</u>	5	3	, ,	,	ď	<i>,</i>	$^{\prime})$	\
	6	6	6	6	6	6	6 1	6 (6 6	6	5	6	6	; (6 6	,	6 1	6	8 (į	6	6	6	6	6	g.	6	6	6	6	þ	é	É	•	1	\ 	/6	V	1	Ì	$\langle \rangle$	(B, i	,	įγ į	/	()	6/	6/	ξ\ (ξÝ	į γ	<u>,</u>		/	(;	K)	1	()				1	6	b	è	Ý	É	É	6	1	6	1	É	6	6	É	6	É	/	Ì
	7	7	7	7	7	7	,	, ;	7	7	7	7	?	1 7	, 7	, ;	7	7	7 7	1	7	7	7	7	7	7	7	7	7	7	ľ	1	/	,	Ì	1	A,			Ŋ	λ,	Λ,	λ,	\ !``		/	1		/	٧)	/	/	Ŋ		$\langle \cdot \rangle$	/	/		X	A	X	Ă,	Å	Ä	Å	'n	7	,	($\langle \rangle$	$\langle \rangle$	$\langle \rangle$	$\langle \rangle$	$\langle \rangle$	Ą,	Ά,	λ,	λ,	λ	/	<i>\</i>
	8	9	g	g	2	a :	a :	Q 1	1 9	j Úg					2 5		.	.	A 1		ı A	2	g	A	2	8	R	R	R	£	Ž,	, a	\ &	\ a	/	/		/	/	/	/			1	/	Ì	\backslash	,	Ι,	'	() ()	$\langle \cdot \rangle$	$^{\prime}$	//				$\langle \rangle$	/					/s	Ž,	7	/	/	/	/	/	/	/	/	/			1	1	/	Ś
										i.										ŀ										Į	\	\	$(\)$	``	\	\	.\	΄,	ν,	\	\	1	΄,	√,	ν,	ľ	`	`\	\	Ι,	Ι,	Ι,	Ι,	Ι,	Ι,	√,	√'	Ι,	1	1	/	1	1	1	7	1	/	/	Ι.	\	\	\backslash	\setminus	\	//	7	7	7	7	/	`
	9	9	9	9.	9	9	9	9 !	9 9	9	9	1 9	9	!	9 5	!	3	9	9 9	1	9	9	9	9	9	9	9	9	9	3	7	,	3.	3	Λ.	1	٧		7	٧.	N	Ņ	١,	7,	ζ.	7,		3		3	γ\	!!	()	()	Ι,	ľ	ľ	Ź.	V	/,	\	/3	٧.	3	7	/3	١	Ý	٧	1	V	γ	À	X	7	ľ	ľ	٤.	3	Λ,	,
		-	<u> </u>		٠.					έc				'	. !			•						د،	40	*/	**	••	~	2.1		744	Y	•			٠.	~	-7	• 1		٠,	7.		-17	2.3	ت	<u> </u>	τ.	٦.	7.	٦.	~	7.			_	×			-	-	_	-	-	_	-	٠.	_			<u>ت</u>			7.	···	X.		T.	A -2	٠-

Columns:

1 - 10	Begin Time, In Days,	DDDDD.DDDDD
11 - 20	Step Time, In Days,	DD. DDDDDDDD
21 - 30	End Time, In Days,	DDDDD. DDDDD
31	Blank Means Output In I	Kilometers Per Sec.
	1 Means Output In Earth	n Radii Per Min.

Note: Decimal points may be punched anywhere in each of the first three fields.

Request Card CCOE

JOB CCOEr 2 RUN . CCOEBZ,DATA 0.69786993 4172 1 58 ALPHA 11620. 35.209999976 48.54090166 1961 4172 21961 48.54090166 4172 3 0.07414181 209.17569106 194.0101.047 1.05549147 7.52633275-.. 4172 4-1.2992010E-07 -4.00362793 4172 5-0. -2.4287259E-04 J.6286715E-04- . 4172 6 1.00000000 360.000009999 -:. 0 (60.000000.00100000 60.01000

ENUDATA

LNDOFJOBR

REEFERENCE RESERVE	AND VELOCITIES	FOR 58 ALPHA	ELEMENTS 1720
TIME	X	Y	X KM +
DAYS	XDOT	Y 0 0 T	ZDOT KM/8EOP
60.00000	5280,734	5011.540	# 72,2 # 2#
•	45.151638	3.709421	-6.472131+
60.00100	4816,630	7512,215	-1803,102*
• • •	-5,598174	3,252776	-4.7801504
60.0520 0	4315,338	5571,853	-1924,595
, , , , , , , , , , , , , , , , , , ,	-6.012291	2,759113	-5.656223.
00.00300	3779.884	5787.371	-1633,9774
• • • • • • • • • • • • • • • • • • • •	-6,388631	2,230950	-5.499624+
60.00400	3213,765	5955,922	-2125.432 ·
	•6,721775	1,471480	-5.3107824
60.ეენცე	2620,941	6074.970	-2405,146.
	-7.006355	1,084614	-U, Q89341+
60.00600	2005,829	6142,346	-2001,353+
	-7;237188	0.475013	-2,636215.
60,00700	1373,280	615,317	-2894,3624
8.400,00	-7,409424	-0.151938	#2 ,552655.
60.g⊓ ≅ 00	728,547	6115.644	-8101,618+
10000	-7.518712	0.790139	-2,2404634
60.00900	77,225	6019.644	-3250.748e
-0100,00	-7 561571	-1,432857	-1.902039+
60.01000	-574,806	5668,238	-3429,611.
-4107000	·7 .534568	-9 477424	KAR770.
END+S	-, , , , , , , , , , , , , , , , , , ,	-2,072828	-1,540379+

RESPLT

(Residual Plot)

INPUT DECK: Schedule Tape Mode

An SPSJOB card is required. The following options of data input and output are specified in columns 17 and 18:

a) Input option, column 17:

Option	Observation Data	Element Data	Sensor Data
0	Observation Cards	SEAI Tape	SEAI Tape
1	Observation Cards	Element Cards	SEAI Tape
2	Observation Cards	Element Number Cards	SEAI Tape
3	Observation Cards	SEAI Tape	Sensor Cards
4	Observation Cards	Element Cards	Sensor Cards
5	Observation Cards	Element Number Cards	Sensor Cards

b) Output option, column 18:

0 = print (DS. 1) and punch cards (DS. 2)

INPUT DATA:

Element data and sensor or station data may come either from standard cards or from the SEAI Tape depending on the input options chosen. The number of input cards is limited by the size of the O, E and S blocks of the system.

Observational data always originates from standard observation cards, which have been ordered by satellite number and contain an association indicator in col. 80.

If untagged observations (a zero sat. no.) are to be reduced, the first of the untagged observations must contain the satellite number of the element set against which the observations are to be reduced. If this procedure is inconvenient, a card may be inserted preceding

the untagged observations. This card must contain the satellite number to be used and an association indicator in col. 80. In this case, the sensor number must be blank.

The association indicator is necessary on all observation cards to indicate whether the observation is an angles only or a radar observation.

Association Status	Observation Kind	Association Category
1	Radar	Associated
2	Radar	Doubtful
3	Radar	Unassociated
4	Angles Only	Associated
5	Angles Only	Doubtful
6	Angles only	Unassociated
9	Radar	Special Unassoc.

OUTPUT:

Two types of output are provided: 1) the printed output of the reduced observations, and 2) the punched card output of the reductions, with pen commands, required as input to the EAI Data Plotter.

- 1) The printed output consists of the reduced observations, sorted by revolution number, for a given satellite. Headings are printed for the data columns which contain: the satellite number, the observation number, the revolution number, the time (minutes/100) since epoch, the vector magnitude in kilometers, the revolution number (N/1000) since epoch, the element number, the association indicator, and the station number.
- 2) The punched card output of the reduction is used as input on an EAI Data Plotter which is assumed to have line plotting capabilities. The required

commands are punched in column 55. The first card of output will stop the plotter (7 in col. 55). This is done to enable the operator to change graph paper and position the origin. The cards which draw the axes follow the stop command (six cards). The graph labeling cards are next and cause the plotter to draw the characters S, E, R and T. These characters are followed by the satellite number, element number, epoch revolution number and the epoch time in days. A stop command follows the above data (7 in col. 55). (The deck may be broken at this point if the axes and labeling is not desired). The data cards containing the information to be plotted follow the stop command and continue until the next stop command is reached.

Two types of plots can be obtained from the data cards: 1) the time difference versus the revolution, and 2) the vector magnitude versus the revolution.

Two IBM 523 board wiring diagrams have been supplied in Section 1 under the program description.

The scaling is such that both plots can be obtained on the same piece of graph paper. To achieve this result, the IBM 523 board must be changed when the final stop command is executed. The deck should be broken as described above and the data cards reprocessed. It is recommended that a symbol pen or color change be used in order to distinguish the two plots.

The graph scaling is as follows:


- 1) x represents the epoch revolution number
- 2) each centimeter represents 20 revolutions

- 3) y_0 is the origin of either a) the vector magnitude, or b) Δt .
 - a) each centimeter represents 500 kilometers and under b) each centimeter represents 5 minutes.
- 4) x should be 5 centimeters from the left edge of the lined graph paper and y should be 9 centimeters from the bottom.
- 5) full scale is then:
 - a) $x_R = -100$ to +400 revolutions from epoch
 - b) $y_{VM} = 0$ to 4500 kilometers
 - c) $y_t = -45 \text{ to } +45 \text{ minutes.}$

```
RESIDUAL PLOT TEST
                JCL
SPSJOu
       RESPLT
                15
634119 160EPSI 1
                                                   064.952587196
                               10724 • • 0103117091
                                                                                 Ε
U34119 21962
                       95.5409548245
                                                    86.507771350
                                                                                 Ë
                        66.000278446 154.755442868
J34119 30.0631417607
                                                     1.039077688
                                                                                 Ë
J34119 4
         •17817:9E-06-
                         v•556649536- •435992405
                                                                                 Ε
U34119 5
                                                                                 Ε
U34119 61.U499039926
                                                                                 Ε
                                                                                 Ε
034119 7
U64072 16U PI 2
                                                    48.520469764
                                7434 • • 0068745180
                                                                                 Ε
                      103.8924893946
064072 21962
                                                   288.173766341
                                                                                 Ε
                      238.898923201 292.725048086 1.097616031
064072 30.0681589195
                                                                                 Ε
U64872 4-0.2120462c-0b- 4.648600419 4.188370136
                                                                                 Ε
064072 3
                                                                                 Ė
                                                                                 Ε
064072 61.1052130445
064072 7
                                                                                 E
070063 161 ALPHA
                                6505 . . 0059378838
                                                   097.365436347
                                                                                 E
                       95.5084685341
                                                   168 • 650023755
670063 21962
                                                                                 Ε
J70063 3 J658423555
                       191.849369846 132.969814701 1.672990160
                                                                                 Ε
070363 4-0.6444625E-08
                          •977295872- 3.49846624C
                                                                                 E
                                                                                 Ε
070063 5
                                                                                 Ε
070063 61.0793995088
070∪63 T.
                                                                                 Ε
034250039323405234507553102630 572000 135870 568200000000 0 0 03452
                                                                           43358
                                                                                1
034250039620405234455523108060 612006 127500 541500600006 0 0 0 03452
                                                                           43357 1
034250039020405234449529118600 615000 123060 540300000000 0 0 0 03452
                                                                           43356
                                                                                 1
034250039020405234443514124000 625000 119390 522600000000 0 0 0 03452
                                                                           43355
                                                                                 1
034250039020405234437519129000 642000 118390 503200000000 0 0 0 03452
                                                                           43354 1
U34250039020405234431525137000 660000 113340 504400000000 0 0 0 03452
                                                                           43353 1
034250039020405234425530147000 672000 109770 4d3100000000 0 0 0 03452
                                                                           43352
                                                                                 1
034250039020405234419557149000 694000 110510 448400000000 0 0 0 03452
                                                                           43351
t34250039020405234413521162000 703000 105510 456400000000 o o o o3452
                                                                           43350 1
034250039020405234407527160000 724000 102910 4305000000000 0 0 U 03452
                                                                          43349 1
034250039020405234401512174000 745000
                                       99450 404500000000 0 0 0 03452
                                                                           43348 2
03425u039u204u52543555171750u0 767000 i99270 381300000000 o o o o3452
                                                                           43347
                                                                                 1
0342500390204052343495641@2000 790000
                                        95680 357800000000 0 0 0 03452
                                                                           43346 1
034250039020405234343569188000 811000
                                        94796 331966000000 0 0 0 03452
                                                                           43345 1
034250039020405234337575194660 835066
                                        92080 3047000000000 0 0 0 03452
                                                                           43344 1
034250039020405234331581202000 859000
                                        90940 277800000000 0 0 0 03452
                                                                           43343
034250039020405234319571212000 920000
                                        87600 214100000000 0 0 0 03452
                                                                           43341 1
034250039020405234313577217000 941000
                                        86810 180200000000 0 0 0 0 03452
                                                                           43340 1
034250039020405234307562220000 972000
                                        85940 148100060000 0 0 0 03452
                                                                           43339 1
                                       84930 118300000000 0 0 C 03452
U34250C39U2U4052343U1567219CC01010GGG
                                                                           43338
0342500390204052342555732200001044000
                                        83490
                                              727000000000 0 0 0 03452
                                                                           43337 1
0342500390204052342495792270601073000
                                        83430
                                               42200000000 0 0 0 03452
                                                                           43336 1
C342500390204052342435642250U01107000
                                        53070
                                                1500000000 0 0 0 03452
                                                                           43335
                                                                                 1
034250039020435234237569227000114700J
                                        83780
                                               30000000000 0 0 0 03452
                                                                           43334
0342500390204100646375312230001044000
                                        58280 438200000000 0 0 0 03745
                                                                           24768 1
U3425003902U4100846315372430001C10UCG
                                        55850 399500000000 0 0 0 03745
                                                                           24769 1
                                        53870 3570000000000 0 0 0 03745
                                                                           24770 1
U34250039U2U4100846255422560U0 97300C
                                        51060 252200000000 0 0 0 03745
                                                                           24772 1
034250039020410084613533201000 876000
                                        49500 1932000000000 C 0 0 03745
                                                                           24773 1
U34250039020410034607538290000 825000
                                        48490 130100.00000 0 0 0 03745
                                                                           24774 1
034250039020410004601544296000 768000
                                       48230 64000000000 0 0 0 03745
                                                                           24775 1
034250039026410064555550369000 709000
                                                6300000000 0 0 0 03745
                                                                           24776
034250039020410084549535315000 649000
                                        48340
                                               74100000000 0 0 0 03745
U3425003902041008454354U311000 587000
                                        47720
                                                                           24777 1
                                                                           24778 1
                                        49340 139800000000 0 0 0 03745
034256039020410084537525305600 518606
                                        61650 502800000000 0 0 0 03745
                                                                           24786 1
U3425U039U2U41U084449529217U00 1580U0
034250039020410084443534201000 132000 64650 527500000000 9 0 0 03745
                                                                           24787 1
```

0 03745 2478 0 03745 2478 0 03745 2479 0 03745 2479	0 0 03745 24793 0 0 03745 24794 0 0 03745 24795 0 0 03745 24796 0 0 03745 24797 0 0 03677 19858 0 0 03677 19860 0 0 03677 19860	0 0 03462 06961 0 0 03462 06968 0 0 03462 06969 0 0 03462 06970 0 0 03462 06971
49900000000 68000000000 83600000000 99200000000	6242CCC000000 633000C000000 6402CC0000000 6469C0000000 652800000000 665900000000 4499000C00000 4335CC000C000 64335CC0000000 373800C0000000	355700000000 321400000000000 2852000000000000000000000000
68 70 77 80	85490 89270 92790 97400 101230 105280 124000 120640 117390	467
342500390204100844375401890C0 1040 34250039020410084425536170000 620 34250039020410084425536170000 620 34250039020410084419515158000 430	1008 11008 11008 11008 10008 0905 0905 0905	0702500390204060633J15354040003041030 0702500390204060632555204220003004000 0702500390204060632495264320J02972000 0702500390204060632375164670J02882000 0702500390204060632255284899U02778000 END CASER FNDOFJORR

SATNO	OBSNO	REV	DT(MIN)	VMAGN	NREV		ELN0	ASTAT	STA
034	43334	10731	0012	56	,007	8	119	1	039
034	43335	10731	0010	48	.007	8	119	1	039
034	43336	10731	<pre>001.0</pre>	48	.007	8	119	1	039
034	43337	10731	0051	52	.007	8	119	1	039
034	43338	10731	001.0	48	.007	8	119	1	039
034	43339	10731	0009	41	.007	8	119	ĩ	039
034	45340	10731	0009	43	.007	8	119	ī	039
034	43341	10731	0012	54	007	8	119	ī	039
034	43343	10731	0010	49	,007	ě	119	ī	039
034	43344	10731	m.0012	54	.007	8	119	ī	039
034	43345	10731	0011	51	.007	8	119	î	039
0.34	43346	10731	0013	62	.007	8	119	i	039
034	45347	10731	0012	53	.007	8	119	ī	039
034	45348	10731	0012 0015	72	.007	8	119	2	039
	43349		•		.007	8		1	
034		10731	0013	60		8	119	i	039
034	43350	10731	m.0014	66	.007		119	i	039
034	43351	10731	0012	58	.007	8	119		039
034	43352	10731	0017	78	.007	8	119	1	029
034	43353	10731	-,0017	76	.007	8	119	1	028
034	43354	10731	~•0013	57	.007	8	119	1	029
034	43355	10731	~. 0015	72	• 0 0 <u>7</u>	8	119	1	039
034	43356	10731	-,0016	72	.007	8	119	1,	0.39
034	43357	10731	0016	75	.007	8	119	1	039
034	43358	1,0731	-,0010	47	.007	8	119	1	039
034	24798	10800	.0268	1194	.076	8	119	1	039
034	24797	10800	.0269	1195	.076	8	119	1	039
034	24796	10800	.0268	1189	.076	8	119	1	039
034	24795	10800	.0269	1191	.076	8	119	1	039
034	24794	10800	.0268	1185	.076	8	119	1	039
034	24793	10800	.0268	1180	.076	8	119	1	039
034	24792	10800	.0271	1188	.076	8	119	1	039
034	24791	10800	,0269	1174	.076	8	119	1	039
034	24790	10800	0268	1166	.076	8	119	1	039
034	24789	10800	.0269	1161	.076	8	119	ī	039
034	24788	10800	0267	1147	.076	8	119	ī	039
034	24787	10800	.0268	1142	.076	8	119	ī	039
034	24786	10800	.0267	1132	.076	8	119	ī	039
034	24778	10800	.0262	1001	.076	8	119	ī	039
034	24777	10800	· · ·	988	.076	8	119	î	023
	24776		.0263	973	.075	8	119	ī	039
034	24775	10800	.0263	964	.076	ė	119	î	039
034		10800	.0262		.075	8	_	î	039
034	24774	1,0800	.0262	959	076	8	119	i	
034	24773	10800	.0261	961	.075		119	_	039
034	24772	10800	.0261	971	.076	8	119	1 1	039
034	24770	10800	.0260	1014	.076	8	119		039
034	24769	1,0800	.0258	1045	.076	8	119	1	039
034	24768	10800	.0258	1090	.076	8	119	1	039
SATNO	ORSNO	REV	DT(MIN)	VMAGN	NREV		ELNO	ASTAT	STA
070	06973	6515	0003	36	.010	8	63	2	039
070	06971	6515	0004	28	.010	8	63	1	039
070	06970	6515	0005	40	.010	8	63	2	039
070	06969	6515	0005	37	.010	8	63	1	039
070	06968	6515	#.0005	26	.010	8	63	1	039
070	-06967	6515	#.0005 #.0006	. 37	.010	8	63	ī	039
070	06966	6515	0007	40	.010	8	63	2	039
070	06962	6515	0007	40	.010	8	63	ī	029
0/0	00,05	ロノエフ	0000	₩.		-		-	40.

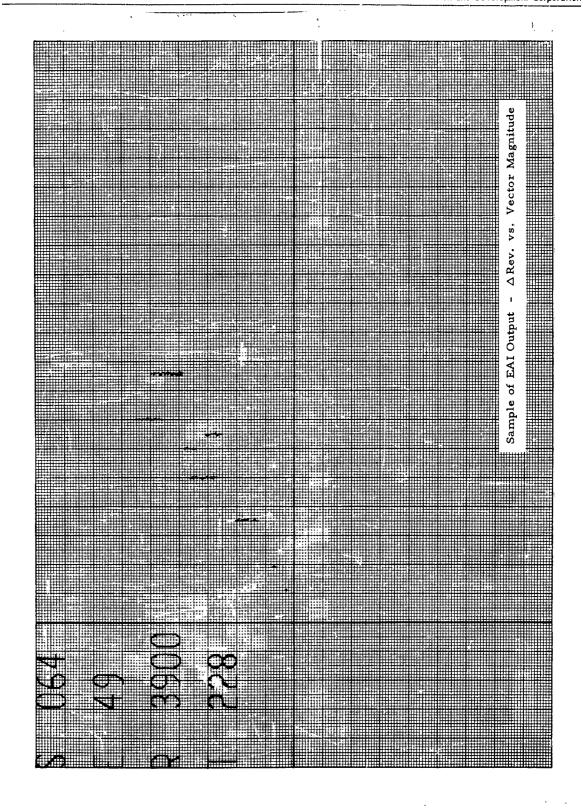

. I _______

PREPINT

(Satellite Situation Report from Nodal Elements)

INPUT DECK: Manual Schedule Tape Mode

INPUT DATA: The input deck should be in the following order:

1. Request Cards (up to 500) in the following format:

Cols. 1 - 3: Satellite number

7 Comment indicator defined as follows 0, no comments on this card 1, read comments contained in cols.

21 - 62

9 - 20: Satellite name

21 - 62: Comments to be printed if col. 7 contains a 1 punch. (A max. of 50 sats. may have comments)

- 2. Request deck terminator: a 2 punch in col. 7.
- 3. Time cards (times for which reports should be issued) in the following format:

Cols. 1 - 4 Year

6 - 7 Month number

9 - 10 Day of month

11 - 17 Hours and minutes (HHMM. MM)

Output unit indicator, defined as follows:

0, output in statute miles

1, output in kilometers

- 4. Time Deck terminator: a 7 punch in col. 8.
- 5. Standard 6 or 7 card element sets. Only the sets required are stored, therefore more than 500 sets may be included in the input deck.
- 6. Input deck terminator: a blank card.

OUTPUT:

Logical tape 11 contains the satellite name and number, element number, latitude, longitude, inclination, period, apogee distance, perigee distance, revolution number, time of node, right ascension of node, longitude of node,

eccentricity, height of satellite, and course. The distances may be in kilometers or statute miles. The dimensions are determined by the option selected on the Time card (col. 20).

	١				2		I	3			4	ŀ				,	5																																															
0	0	0	0	Ý	0	h	10	0	0	0	0 (0 0	0	ß	1	4	olà	79	ď	χ	7	6	6	70	7		7	Ŋ	b	λ	χ	V	Z	7	7	6	b	70	7	Z	2	25	Ŋ	Ý	7	7	7	7	7	79	7	7	7	7	Z	7	7	7	7	7	7	6	4	7
i	2	3	4	V		7)	Į.	10	11	12	13 1	4 1	5 16	17	A)	v).	o	լակ	À	1 2	kΑ	ųλ	M)	⋈	γ	1/4	7)	kΑ	έt	k,	3 / 3	7)	À	λ	λ	λÀ	Λ?	ŀΝ	W	h	M)	ί	έı	k	λ.	λ	V		6	ų à	À	Ý	γ.	V,	•	1	7	Y	γ,	λ	γ_i	W	M)	λ
1	1	1	1	Ŋ	1	۱	1	1	1	1	1 1	1	1	1	1	V	K	ľ	λ)	1	1	þ	y	Ŋ.	\backslash	V	Ŋ	1/	/y	Y		1	Ŋ	Y,		1	þ	Ŋ	V	V)	1	ĺΑ	ľ	X	Ŋ	Ŋ	/,	Ŋ	1/	(χ	X,		Λì	h,	1/	()	X	Ŋ		N	1	Ŋ	Ŋ	Ŋ
2	2	2	2	X	2 :	2	1	2	2	?	2 :	? 2	2	2	3	X.	2 2	/y	Þ	ęν	18	B	Á,	A)	۲)	1/2	1/2	/>	B	À,	१४	s/s	\s\	b/	र्	B	'X	K)	3	X	3	λį	/ş	ş	\$/:	Śβ	B	\z\		λį	ş	έį	śβ	X,	X)	λį	13	βj	έķ	ξĮ	(X	B	Z	X)
3	3	3	3	8	3	3	Ň3	3	3	3	3 :	3 3	3	3	Z	ો	3 9	(X	1	3/3	()	4	/ 3 /	7	λ	/	V	()	¥	Ŋ,	λ	Ŋ	Þ.	Þ,	3/	1/3	Þ	$\langle \cdot \rangle$	V	à	3	4/8	8	à,	z)	3/3	1/3	Ŋ	3/	3/8	Z)	z)	6 /8	/3	3/	3/3	18	, k)	3/3	Ŋ	ો	3	3/
4	4	4	4	•	4 -	þ		4	4	4	4 4	14	4	4	/		þ	1	λ	N	V	Y	X)	X)	1)	Ŋ	Ŋ	1	Ŋ	Y	$\langle i \rangle$		(X)	X	Y)	//	X	X)	/	/	Y	N	Ý	Ŋ,	$\langle \cdot \rangle$	$\langle \cdot \rangle$	X	X	X)	r)	Y,	$\langle \cdot \rangle$	N	X	X)	r)	()	Ý	,	$\langle \cdot \rangle$		X		Y
5	5	5	5	6	5	5	1 5	5	5	5	5 :	5 5	i 5	5	3	5	5 6	1	الإ	<u>,</u>	6	,	,	5	5/	/	1	\ \	Z	3	5 /	() ()	18	Ź,	Ę\	1	É	Ę/	į	Þ	ź)	į);	()	,	7)		é,i	/ <u>\$</u> /	5/	ر ا	Ł	5)	,	3	\$ \	$\langle \cdot \rangle$	1	J)	5 .		1/5	Ś	é,	\
6	6	6	6	9	6	6	\ \ \ 6	6	6	6	6 (6 6	6	6			6	()	S)	6/		P	É	()	5		1 6	/e	þ	6	64		6	k/	13	1	Š,	N	1	\g\		6/6 6/6	6	Ŕ,	6/	//	1		6	3/6	S)	/a	6	É		K B	16	B,	ξ\ (6 /s	\ }	E,	À	6
7	7	7	7	K	7		1	7	7	7	7:	17	7	7	Y		ķ	Y	λ		$\langle \rangle$	λ,	$\langle \rangle$				//	(X	'X	1	1	$\langle \rangle$	/,	λ	γ	/>	χ		//	λ	χ	$\langle \chi \rangle$		λ	χ	/	Ŋ	Ŋ		y_{i}	X)	X)	λ)	$\langle \chi \rangle$	λ	/	A	X	χ	1	4	\ <u> </u>	Å	₹\
8	R	2	g		R	R	Ŋ.	9	g	2	9 1					Ŋ	2 h2	/		//	\ a	6	7			/	'	, <u>,</u>	Ì	<u>ر</u> ه	$\langle \rangle$	'	Ż	/	'	//	1	$\backslash \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \!$	/	7	, /	'	/		/	\backslash	/x				\	/R	//	7	1	\mathcal{I}		1	$\langle \rangle$, \ , \		P	/	,

Field	Cols.	
1	1-4	Year
2	6-7	Month
3	9-10	Day
4	11-17	Hours and minutes
5	20	l, output in kilometers
		0, output in statute miles

Time Card
PREPINT

1		ĺ			2	1				3																					4	1																													
0 0	1 6	1	19	2	0	4	0	0) (0	0 (0 0	0	0 (0 0	0	0 1	0 0	0	0	0	0 (0 0	0	0	0	0 () (0	0	0 (0 0	0	0	0 0	0	0	0 0	0	0 (ÒÓ	0	0	0 0	9	0 (0 0	9	Q Q	b	γy	7	V	b	6,0	P	b	6/	V	$\sqrt{2}$	Ž
1 2	2 3	١N	1	4	7	Ŋ,	10	11	2 !	3 14	15 1	6 17	10	18 2	29 P.	72	23 2	24 25	21	2/	28	28 3	0 31	32	33	34	35 3	6 3	7 36	30	40 4	1 42	43	44	45 4	47	46	8 S0	51	52 5	3 54	55	56	57 56	5 50	60 8	1 62	6/	(°/4	i pe	ķή	4	ΛĄ	γı⁄	γy	'n,	/s/	۴٧	γ'n	ď	y
11	1	١þ	Ν,	Þ	1	(I	1	1	1	1	1:1	1	1	1 1	1 1	1	1	1 1	1	1	1	1 1	1	1	1	1	1 1	1	1	1	1 1	1	1	1	1 1	1	1	1	1	1 1	1	1	1	1 1	1	1 1	1	1	Ŋ	1	ij	$^{\prime\prime}$	h	1/	1/1	V)	V	У	N	N	'n
2 2	, ,	١,	γ)	/	,	1	, ,	,	, ,	, ,	2 2	, ,	,	2 :	, ,	, ,	2	2 2	,	,	?	2 :	, ,	,	2	2	2 2	, ,	2	2	2 2	2 2	2	2	2 2	2	2	2 2	2	2 2	2 2	2	2	2 2	2 2	2 :	2 2	8	٧,	/	$\langle \mathbf{x} \rangle$	۱,		,	<u>ر</u> د	1	7	λ	$\langle \chi \rangle$	<u>, </u>	١,
		ľ.	//	Ν		ľ									1																																	1	١,	/	Ι,	' '	ι\	Ι,	<i>\ \</i>	. \	7	7	1	Ĺ	′'
3 3	3	3	Ŋ	Ó	3	1	3	3	3 3	3	3 :	3 3	3	3 :	3 3	3	3	3 3	3	3	3	3	3 3	3	3	3	3 :	3 3	3	3	3 :	3 3	3	3	3 3	3	3	3 3	3	3 :	3 3	3	3	3 3	3	3 :	3 3	3	\$\E	13	Ø)	3 /s	(3)	Á,	3\3	3	13,	3/8	\ \$ \	8/	₹'
4.4	1 4	ď	7	/	4	Ŋ	4	4	4 4	1 4	4 4	4 4	4	4	4	1 4	4	4 4	4	4	4	4	4 4	4	4	4	4	1 4	ļ 4	4	4 4	4 4	4	4	4 4	4	4	4 4	4	4 4	l 4	4	4	4 4	1 4	4	4 4	4	4	(X	X	Y)	Ŋ	'n,	λ	1	'n,	4	y	λ	λ
		-1`	()	Λ	П	N									1																																	1	١,	/	Ι,	Ι,	١)	. /	,	//	٠,	• •	\	.\	$\overline{}$
5 5	5 5	5 <u>[</u>	į)	Ē,	5	١Į	5	5	5 :	5 5	5	5 5	5	5	5 :	5 5	5	5 5	5	5	5	5	5 5	5	5	5	5	5 5	5	5	5	5 5	5	5	5 5	5	5	5 5	5	5 !	5 5	5	5	5 5	5	5	5 5	3	5 \;	16.	61	{ }	₹)	₹,	5 5	, 5,	5	5 5	্5্	5	۸
6 6	٠.		//	7		V.		·							ا		c				ė	c :			c	c			2 2	2	c :	٠.	2	c			2	2 2	2	2		2	c	6 6		6 1	2 2	/2	√.	/	7)	//	۱,	ري	ζ,	۰,	۱,	$\langle \cdot \rangle$	/s/	٧,	٦,
0 (, ,	וויי	٧,	١,	ľ	Ή,	, 0	0	,			0 0		0	٩ľ	, ,	0	0 (, ,		0	•	,		u	٠			, ,		٠,			۰			۰		•	•		٠	•			•		ľ	7.	/~	1	"	7	Ĭ.	Υ,	\	₹.	Ν,	1	1	7
17	17	7	V	Ą	Ы	ď	17	7	7	17	7	7 7	7	7	7	17	7	7 7	17	7	7	7	7 7	7	7	7	7	7	17	7	7	7 7	7	7	7 7	7	7	1 1	7	7	17	7	1	7 7	7	7	7 7	N	λ	Ą	γ	ď	(X	X	λ)	۲;/	V	λį	À	γ.	ŕ
		k	Ι.	ν,	H	V									1																																	V.	Ι,	()	()	.\	.\	Ι.	Ι,	()	ι)		11	'n	$^{\prime}$
8 8	8 (8 N	Ν	⟨₿	8	N)	8	8	8	8 8	8	8 8	1 8	1	811	8 8	8	8 (3 8	18	8	8	8 8	18	8	8	8	8 8	38	8	8 1	8 8	18	8	8 (8	8	88	8	8 1	88	3	8	8 8	8 8	8	88	8	61	I B	ð,	N	V8	ΛB.	81	K,	Ŋ.	ķξ	ͺδ,	g/	ā,

\mathbf{Field}	Cols.	
1	1 - 3	Satellite number
2	7	l, cards contain comments
		0, no comments
3	9-20	Satellite name
4	21-62	Comments

Request Card
PREPINT

```
JOB
                         TEST PREPINT
                  RUN
                         PREPINTS DATA
          58 ALPHA
          58 BETA
   16
          58 BETA
                    2
    5
          59 ALPHA
   11
                   1
          59 ALPHA
   12
                     INSUFFICIENT OBSERVATION
        1 59 DELTA
   15
          59 ETA
   20
          59 IOTA
   22
   23
          59 IOTA
        1 59 MU
                     IN HELIOCENTR ORBIT 450.0D 1.317AU .9766AU
  112
          60 EPSILN 3
   36
        1 60 EPSILN 4 INSUFFICIENT OBSERVATION
   37
   43
          60 ZETA
                   1
   45
          60 ETA
          60 ETA
                    2
   46
          60 ETA
                    3
   47
                    1
   49
          60 IOTA
  102
          61 LAMBDA 2
  107
          61 NU
  115
          61 OMICRON1
          61 RHO 4
  167
  163
          61 SIGMA
          61 UPSILON
  170
          61 OMEGA 1
  182
  186
          61A BETA
  188
          61 SIGMA 3
        2
  1961 10 11 1200
  1961 10 11 1200
1961 10 11 1430
  1961 10 11 1430
                                        0.09500069 33.18999958
                               14740.
    4214 1 58ALPHA
    4214 21961
                        280.80691970 1961 280.80691970
    4214 3
                        201.61903020 107.42337540 1.05476451
    4214 4
                          -4.96605333 7.42265104 O.
    4214 5 0.
                        -3.780903E-004 5.651232E-004 U.
                        0.07371200
                                   -1.968034E-007
    421 6
    4214 7
                                        0.18984776 34.24499,89
    5 78 158 BETA 2
                               13950.
    5 78 21961 278.25450570 5 78 3 0.09295403 193.98439300 5 78 4-1.484110E-007 -3.02018139 -9.897075E-005
                       278.25430390 1961
                                                  278.25430390
                                       94.50760521
                                                       1.10183595
                                       4.41471416 0.
                       -9.897075E-005 1.446693E-004 0.
    5 78 6 1.00000000 30.00000
                                     0.
                                                      0.
   11149 1 59 ALPHA 1
                               11080.
                                         0.16288486 32.84826871
                                            282.87323970
   11149 21961
                        282.87323970/ 1961
   i1149 3 0.08698856 32.53621¢22 190.73210390
                                                      1.08936014
   11149 4 4.736775E-008 -3.51236494 5.28651193 0.
   11149 5 0.
                       4.308964E-005-6.485486E-005 0.
                                       0.01525878 10.00000000
   11149 6 1.00000000 30.00000
   12110 1 59 ALPHA 2
                                                    32.66509133
                               10100.
                                        0.18352360
                       279.61322930 1961
                                            279 • 61322930
... 12110 21961
   1.568518E-005-2.369501E-005 0.
   12110 5 0.
```

```
1.00000000
                        30.00000 500 0.
12110 6
015 2 1 59 DELTA
                                     •75239
                                                   47.1
                        1007•
    2 21961
                        8.851497
015
                                     1961
015
     2 3.498311195
                       284.32
                                     171.
     2 4- •19237 E-04- •309
015
                                        • 3
     2 5 0.
015
    2 6 1.00000000
015
                       30.
                                  50.0
16 96 158 BETA 1
                               8710.
                                       0.20659353
                                                      34.26000000
16 96 21961
                      283.30713240 1961
                                                   283.30713240
 16 96 3
            0.09599846
                         52.88917942 133.76420490
                                                       1.10247077
16 96 4-1.934651E-007
                         -2.84010604
                                         4.15013865 0.
16 96 5 0.
                      -1.118959E-004 1.635091E-004 0.
16 96 6
            1.00000000 360.000009999
```

```
1.00000000 60.000009999
                                         0 •
                                                        0.
186
    6 6
                                         0.00765404
                                                     91.13000000
                                 700.
     1 1 61 SIGMA 3
188
                       272.04341050 1961
                                                    272.04341050
     1 21961
188
                         221.63437010 119.70460060
                                                        1.52613206
            0.11193875
     1 3
188
                          0.04354981
                                        -1.10200445 0.
     1 4 0.
188
                                                     0.
                        0.
                                      0.
     1 5 0.
188
                                                        0.
            1.00000000 360.00000
                                          0.
188
```

ENDDATA

ENDOFJOBR

PABRABBRABBB DATIV SATELLITE SITUATI THE FOLLOWING INFORMATI	UATIO WATIO	2 N N N N N N N N N N N N N N N N N N N	REPORT . CAMPITED FO	OR,1430.	DU 11 20	T 1961+									1
; <u> </u>	7 6	14 LAA	NA CAR	PERTUD R VIN	APOGE X	LAT LEN INCL PERTOU APOGRE PERTOES DEG DEG DEG R NIN KR	9 9 10 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	TIME NODP	7. A. N. D. E. O. D. E. D. E. O. D. E. D. E. D. E. D. E. D. E. O. D. E. D. E. D. E. D. E. D.	200	7 0 N 0 M 0 M	HEGHT	CSE	LAT	9 NO.
4	7	7 2 7	33.19	104.1	1759.8	349.34	14791	284. 46579	182	.04	5.09484				
40	ç	368 70	34.26	138,2	4315.8	653.6	8723	284, ASSn.	40.	1 170.	4.20657	•			
2	ď	233	34.24	131,8	3940.8	649.5	34018	284 47440	174.	51.	8.18973				
ē,	ī	53.5	32.85	124.5	3274.4	570.04	44099	284 A7664	26.	182	5,16290				
140	67.	24.	1 32.67	120.5	3665.7	550.6	10155	284 BROKE	238.5	342	5 18354	2118.2	.2 118	21.1	315.5
7	4	CEEN	L ABSERVI	ATIO"		•			•						
	•	2 299	33.34	129.7	3732.5	498.7	中ででは	284.4884A	278.5	312.	7.19037				578.0
ř	_	6	50.31	101.1	1077.8	552.04	11375	284 HT344	13A.7	247	247.7.03648	1031.2	2 142	14.7	91.3
Έ.	•	101	1 50.30	104.9	1057.8	555.2	11388	284 R8994	120°	262.	4.03407				496.2
-	11FIN WELT	PUCENT	'R ORBIT	450.ft	1.317AII	.9746AU.	:			•					-
•	•÷		64.89		580.1	277.9	7912	284.47374			224.1.02225	396.2	.2 157	13.9	61.A
	INCHER	Fregent A	' ABSERVI	ATIO.		•	•		;						•
•		1 129	33.02		500.4	472.34	7707	284.57178		295	6.00270	490.8			429.2
	46	9	66.77		1045.0	626.4.	6748	284 45174		24.5	B 02961			4 99-	100
•		£	1 66.77		1,056.8	642.9	6749	284 A67A4	134.7	249	249.6.03077	769.1	1 161		4.00
		10 TOB	1 66.77		1.034.8	646.5	6765	784 #8ng 7		292	1.02898				128.X
		•	47.27		1964.4	1097.14	5235	284,4493		223	7.05481				14.7
		, 9 20 E	1 A1.54		1090,4	202,84	24.80	284 4918A		216.	1,06381			68.8	100
	· .	5 198	28.77		1791.7	4R5.7.	0000	284. #31nT		72.	B. 08687				407.9
	۳	# 21A	65-81	101	998.1	880.44	644	284 H6884		25.	3.00804				216.1
		1 201	47.80		906.8	802.2	1284	284,40399		292	5.00718				501.3
	·	101	1 91.13		3535.9	44.4600	911	784 H5284	222	356	7.00923			-	40
•		1	33. DA	1599	77342.9	294.64	5.4	284 41544	4 6 4	-	1.85236	•		- 17	i.
	EC EC	10 274	82.56		4.004	231.4	449	284 R4564	127	249	0.01923	•			470
	4	10 25E	82.73	0	320.1	222.5	377	264 AS1179		226	S. 007X4	302.8		52	3.55
	٠, ۱	75	91.13	161	3506.8	3395.8	4	784 480SE	222	9	7.00745		471		0
							:			•					÷

MAKETAPE

(Make Input Tape for TELTYP)

INPUT DECK:

Manual Schedule Tape Mode.

INPUT DATA:

- (1) TELEFORM punched in cols. 17-24.
 Used if the message is to broken into 90-line segments.
- (2) Data cards to be converted to teletype.
- (3) FINDATA punched in cols. 17-24. Used to terminate the data deck.

OUTPUT:

Logical tape 11 is input to TELTYP. See writeup of program. The tape can be printed using data select one. The output will consist of a listing of the input data cards with the sentinels required

by the TELTYP program.

JOB MAKETAPEB2 SUN MAKETAPE,DATA

THE QUICK BROWN FO THE QUICK BROWN THE QUICK BROW THE QUICK BRO THE QUICK BR THE QUICK B THE QUICK BROWN FOX JUMPED THE QUICK BROWN FOX JUMPE THE QUICK BROWN FOX JUMP THE QUICK BROWN FOX JUM THE QUICK BROWN FOX JU THE QUICK BROWN F THE QUICK THE QUIC THE QUICK BROWN FOX J THE QUICK BROWN FOX THE QUI THE QUICK BROWN FOX THE QUICK BROWN THE QUICK 9 TIMES. 7 8 9 IIMES. TIMES. 9 TIMES. 9 TIMES. 9 TIMES. 3 9 TIMES. 7 8 9 TIMES. 9 TIMES. O. 9 TIMES. 9 TIMES. ထ 8 9 TIMES. 9 TIMES. 9 TIMES. x 9 TIMES. သ 9 TIMES. 9 TIMES. သ 8 9 TIMES. ထ 4 9 TIMES. ဆ ø 'n ICK BROWN FOX JUMPED OVER THE LAZY DCG S BACK 0 1 2 QUICK BROWN FOX JUMPED OVER THE LAZY DOG S BACK 0 9 တ 5 UICK BROWN FOX JUMPED OVER THE LAZY DOG S BACK 0 1 ω ŵ S 4 E QUICK BROWN FOX JUMPED OVER THE LALY DOG S BACK သ QUICK BROWN FOX JUMPED OVER THE LAZY DOG S BACK 9 CK BROWN FOX JUMPED OVER THE LAZY DOG S BACK 0 σ o BROWN FOX JUMPED OVER THE LAZY DOG S BACK 0 1 9 ∞ 4 Ŋ BROWN FOX JUMPED OVER THE LAZY DOG S BACK 0 1 THE QUICK BROWN FOX JUMPED OVER THE LAZY DOG 9 9 HE QUICK BROWN FOX JUMPED OVER THE LAZY DOG 4 OWN FOX JUMPED OVER THE LAZY DOG S BACK 0 1 K BROWN FOX JUMPED OVER THE LAZY DOG S BACK 9 WN FOX JUMPED OVER THE LAZY DOG S BACK 0 1 J 7 4 FOX JUMPED OVER THE LAZY DOG S BACK 0 1 ROWN FOX JUMPED OVER THE LAZY DOG S BACK FOX JUMPED OVER THE LAZY DOG S BACK 0 1 S BACK X JUMPED OVER THE LAZY DOG S BACK 0 1 OX JUMPED OVER THE LAZY DOG S BACK 0 0 3 4 MPED OVER THE LAZY DOG S BACK 0 1 2 JMPED OVER THE LAZY DOG S BACK 0 1 JUMPED OVER THE LAZY DOG S BACK JUMPED OVER THE LAZY DOG S BACK OVER THE LAZY DOG S BACK 0 1 2 PED OVER THE LAZY DOG S BACK 0 N FOX JUMPED OVER THE LAZY DOG OVER THE LAZY DOG S BACK 0 1 ED OVER THE LAZY DOG S BACK

FIN DALA ENDDATA

ENDOFJOBR

XYZLAR

(Look Angle Report from x, y, z, Coordinates)

INPUT DECK: Manual Schedule Tape Mode

INPUT DATA:

The input data is composed of sets, or units, each of which consists of a standard station card, a request card, and optional ephemeris data. Ephemeris data is required only in those data units which initiate a new vehicle or satellite output. The source of ephemeris data is either punched cards or an ephemeris tape (unit 7).

The order of cards for an input data unit using ephemeris cards and initiating a new satellite is as follows:

- (1) Standard Station Card
- (2) Request card specifying time parameters for the look-angle computations and input/output options.

Cols.	1-4	year)
Cols.	5-7	day	base time of
Cols.	8-9	hour	desired look-
Cols.	10-11		angle
Cols.	12-13	seconds	predictions
<i>~</i> 1	14 17	41 342 6	

Cols. 14-17 thousandths of sec

Cols. 25-34 maximum increment of time from base time, for desired look-angle predictions. When blank, all ephemeris data will be used to generate predictions.

Col. 44 0 = ephemeris follows on cards

Col. 45 l = only output of visual sightings desired

0 = output of all sightings

Col. 46 l = include negative elevation sightings in output

0 = positive elevation sightings only in output

Col. 47 Not interrogated by program

- (3) Vehicle identification card containing the alphanumeric vehicle name in columns 1-16.
- (4) Ephemeris cards, in order of increasing time increment over base time.
 - Cols. 1-14 time increment, in minutes, from base time
 - Cols. 15-28 x coordinate of vehicle position
 Cols. 29-42 y coordinate of vehicle position
 - Cols. 43-56 z coordinate of vehicle position
- (5) Blank card to terminate the ephemeris cards.
- (6) Blank card to terminate program.

This set or unit of input data (1-5) will generate one schedule of look-angles for the vehicle data contained on card types 3 and 4. Additional schedules for different stations are obtained by adding station and request cards, in pairs, after the blank card (5).

To obtain schedules for vehicles or satellites in addition to that of the first input unit, another ephemeris card set (1-5) is required. A minus sign (-) must be punched preceding the station number (cols. 1-4) of the station card. Schedules for different stations result from using station and request cards, in pairs, as above.

The order of cards for an input data unit using the ephemeris tape is as follows:

- (1) Standard Station Card.
- (2) Request card, as above, with two exceptions:
 - Col. 44 l = ephemeris tape to be used
 - Col. 47 l = punch ephemeris data
 - 0 = no ephemeris card output
- (3) Blank card to terminate program.

Prediction angles for additional stations for a given vehicle are obtained by adding additional station card-request card pairs before the blank card (3).

OUTPUT:

The basic output is a schedule of predicted lookangles for a particular station at specific times. The
report headings are the satellite name; the label LOOKANGLES FOR, followed by the station name; and
headings for the sighting coordinates and time data.

Each data line consists of a day of year, hour, minute, and fraction of minute of the search point; the predicted right ascension, declination, azimuth, and elevation in degrees; the predicted slant range in kilometers; and the elevation and illumination angles of the sun. The sun data indicates if the satellite will be visible at the time and location of prediction.

In addition to the look-angle data output, the program will also produce punched cards containing the satellite's ephemeris data in the format of the ephemeris card input. The punched cards may be obtained only when the ephemeris information originates from ephemeris tape input. A 1 punch in column 47 of the first request card for a given satellite will produce one set of ephemeris card output.

	1	2	3	4 .	
000000	00000000	00000000000000	000000000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0	a a a a a a a a a a a a a a a a a a a
1 2 3 4 5 6	7 8 5 10 11 12 13 14	15 16 17 18 19 20 21 22 23 24 25 26 27 28	29 30 31 32 33 34 35 36 37 36 38 40 41 42	10 44 45 46 47 48 49 50 51 52 53 54 55 50	क्ष्री क्षरें क्षेर्र पूर्व पूर्व रहे रहे १९५ (१९ फेर कि होर्क हो के के भूत पूर्व पूर्व पूर्व (हे व्यक्तिक है। है
111111	11111111	111111111111111	111111111111111	1	<i>ኢ</i> ኒላኒላኒላኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒኒ
	1		. 		
222222	2 2 1 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	\$\\$\\$\#\#\\$\\$\\$\\$\\$\\$\\\\\\\\\\\\\\\\\
333333	3 3 3 3 3 3 3 3 3 3	33333333333333	3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	£\$
		4444444444444			
,,,,,,	,,,,,,,,		,,,,,,,,,,,,,,		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
5 5 5 5 5 5	55555555	55555555555555	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5	& & & & & & & & & & & & & & & & & & &
886666	66666666	6666666666666	66666666666666	6666666666666	3.3.3.6.6.6.6.6.6.6.6.6.6.6.6.6.6.6.6.6
				•	(
111111	,,,,,,,,	777777777777777			<i>₹₹₹₹₹¥Y</i> Y <i>YYXXX X X X X X X X </i>
	* * * * * * * * * * * * * * * * * * * *	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	**************************************

Field	Cols.	
1	1-14	Time increment, in minutes
2	15-28	x coordinate of vehicle position
3	29-42	y coordinate of vehicle position
4	43-56	z coordinate of vehicle position

Ephemeris Card
XYZLAR

i				2	İ	3		4			ţ	5									ľ				6	;														ŀ	rle	3	9	q																																				
			┝	_	+	_	+	_	+		_	-	-	_	4	7	7	7	7	7	4	_	_		_			-	-	-	t	7	7	7	7	7	7	7	7	4	t	+	t	╁	ς	7	7	7	7	$\overline{}$	7	$\overline{}$	7	7	7"	7	ζ-	7	τ	7	7	,	~	7	ζ-	7	7	_	۲	7	7	7	7	7	7	,	۲,	7	7	7
0 0	0	0	0	0	0	0 (8	0	0	0	0	0	0	h	'n,	a,	ψ	y,	ı٧	Н١) (0	0	0	0	0	0	0		ĺ	ľ	ľ	ľ	ľ	ľ	N	λ	N	N	1) (9	ok	0)	Q`	Ġ	ď	ò	Ó,	ď,	١g)	ď	'n	ď	Ò	ιò	ď	Ŋ	V)	ď	'n	ì	ιÌ	r)	V,	X	ď	ď	Ŋ	νì	N	λ	λ	y	ð	ď	Ŋ	V)	ò
1 2																																																																			lo`	×	۲,	ĭ	۲,	1	'n.	Ž,	χ	λ	δ	ì		ì
1 1	1	1	1	1	1	1 1	ıþ	1	1	1	1	1	1	1	X)	A,	4/	1/	y,	1	ď	1	1	1	1	Í	1	1	1	Ţ	١	ľ,	V,	V	V	N	Ν	Ν	V,	N	ıþ	ı	ıŀ	1	K	'n	'n	1,	4,	Á,	Ă,	X	ſ,	ħ,	/1	A,	Á	ľ	X	1	Ł,	ĺ	νì	V	١	ď	ď	Y)	Y	Y	1		r,	X,	ľ	١	ĺ,	ĺ,	1	ľ
			1		-		1		1						V.	/)	1	1	$^{\prime}$	/,	V										١	/,	.\	.\	/	\setminus	/	Ν,	/	٧	1	Ì	1	ŀ	Ι,	\	/	Ι,	'	′,	Ι,	Ι.	\	1	')	ν,	Ι,	Ι.	/	/	/	')	΄,	ν,	\	`	'	Ι,	1	١	.\	'	′)	Ι,	΄,	/	.\	'	Ü	٠,
2 2	2	2	2	Ź	2	2 ,	4	2	2	2	2	2	2	2	K,	Ś,	ş	Ŋ	Ż,	3/	Ų	2 2	2	2	2	2	. 2	2	2	2	1	Y)	/	٧	N	Λ	λ	λ	V,	N.	2 2	? ;	2	2	2\	Ś,	খু	Ì	λ	χ,	ζŽ\	Ś,	Ą	ķ	Å	()	⟨}	⟨2	ΛŞ,	V)	Ą	Ä	¥	()	Ų	λ	۸	Þ	V	٧	٧	١	٤\	ď,	Ś,	Á,	Ŋ	ľ	(١	ደ
			1		١		١		1						K,	/)	′)	1	Ι,	/,	V										١	1	/	/	/	/	Ι,	Ι,	Ι,	V	Ì,	1		1	/	'	ι`	Ν,	/	/	.\	′ /	ι,	Ι,	Ϊ,	/	\	′ /	ι)	ι,	ι,	ľ	/	\	′ `	ν,	/	' '	Ι,	١,	١,	١	\	')	′)	ι'	/	\	Ι,	ľ
3 3	3	3	3	3	3	3 :	3 :	3	3	3	3	3	3	3	3	ø	£,	Ł,	Į,	Z)	1	3 3	3	3	3	3	3	3	3	3	I	N	V	V.	٧.	Ŋ.	1	3,	8,	V	3 :	3 :	3	3	\$	Ļ	3/	(3)	Ź,	Ã,	١٤	Z	\$	ŧ,	√3	\3	Ý	1	3	Ĺ	Ć,	()	\3	Λ,	3\	3/	ð,	3	()	()	۷,	ľ	À	À	£,	ŧ,	V3	٧,	٨	3
			ı						١.							7	Ŋ	(,	١,	7,	V								_		Ν	$^{\prime}$	Λ.	Ι.	/	\	/	7	ι,	V	ŀ				ι,	\	/	`,	()	ν,	Ι,	\	/	$\langle \cdot \rangle$	()	Ι.	Ι.	\	\	/	\	′ '	$^{\prime}$	ľ	\	$^{\prime}$	ι'	١	\	′,	۱.	\	\	\	\	′)	Ι.	/	\	ľ
4 4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	•	Ŋ,	¥	¥,	¥.	٧,	ď	4	4	1 4	1	4	. 4	4	4	4	K	У	Ν	٧	ί,	ſ,	ľ	(()	(Ì	4	1	4	4	٩	4١	4,	¥	¥	٠,	^	4	Ý	¥	¥	¥	١,	١,	4	V	¥	Y	¥	ľ	Į.	٩	٨	4	٧	V	Į٧	()	₹`	۲	٦	Ĭ,	١,	7	١	۸
			L	_	_		ا.		L	_	_		_	_	D	7	7	7	7	7,	V.										٨	.\	.\	./	Ι,	7,	7,	7,	7,	ľ	Ĵ.	ا.		_[`	`/	ر ،	7,	7	7	.)	(,)	ľ,	Λ,	7	Ĺ	′ /	7	\	ľ	Ĺ	/	.\	\cdot	ι,	7	`/	′,	ν,	.\	.\		7,	7,	7	7	()	ι)	ν.	`
5 5	3	9	þ	5	١,	5 :	: اد) 5	13	5	5	כ)	5	3	۶,	٦	٦	6	6,	₹	3 :) ;);) 5	:) ;)) 3)]	K	٧.	٧.	٧.	\	1	٧,	6,	۷,	?]	1	1	기	5	ξ,	۹	٦	'n	2,	۵,	ý	2	g	٥,	73	/2	4	4	Ó	1	٥	√.	٧٠	1	7	5,	۶	7	(,	١.	١.	\	٥/	5,	٤,	y	1	'	7	۴
6 6			٦		اء		اء				_				۵	7	7	7	γ,	7,	J.			, ,			٠.				, L	Λ,	Ν	\setminus	\cdot	$^{\prime}$	"	۲,	٧,	J.	J,	ا		۱	۴,	١,	λ	7	ζ,	r,	۷,	λ	λ	ζ,	ď	ν,	Λ,	/	/	7	\	١,	ĺ.	╲	١,	١,	٧,	7	.)		ν,	\	λ	'n	r,	Λ,	/	.)	′\	١
• •			P	9	•	•		, 6	0	0	0	0	•	0	1	7	7	۴,	۴,	♥∖	7	0 () (, (, 0	, (, 0	, 0	. 0		ľ	٧.	٧.	١,	١,	١,	٧,	٧,	7	7	יוְי	"	미	미	٦	م	۵,	6	٣	٩	٩	۵,	۱,	ሃ	7	١,	١,	/	/0	٧,	6	1		ζ,	\	٩	Ŋ	ď	1	4	1	"	9	١	۵	٥,	٧,	\	7	۲
77	1	7	7	7	,	, .	, .	7	١,	7	7	9	. 4	7	A	7	λ,	Ž,	'n	١,	٧Ì.	, ,	, ,	, ,	, ,	, ,	, ,	, ,	. 1	, ,	ı.	Λ,	Λ,	Ι.	Υ,	λ,	Υ,	γ,	١,	ıÌ.	, .	,	,	,	λ	ネ	٦,	۵,	Ă,	ž	4	۲,	v	Y	7	4	()	\ 7	\ ₇	'n	Ż	١	١,	. }	λ.	λ	ζ,	7,	\	Υ	۱,	١,	١,	X	∤	۱,	7	\	,\	۵,
. ,	,	′	١′	•	1	•	'	•	1'	•	•	•	•	′	K	X.	٧,	γ,	Ι,	7	7	•	' '	'	•	•	•	•	•	,	۲	′,	/	\	/	7	΄,	Έ,	''	V		1	1	۱,	$\langle \ \rangle$	۲	7	١,	^	Υ'	ľ	1	′,	√`	Υ.	Υ,	ľ	ν,	ν,	١,	√,	٧,	λ,	1	′ '	′	1	′,	√'	١,	1	'\	''	΄`	ľ	1	١,	\'	\	`
8 8	1		ı		2	8	g		١	8	8	8	8	8	ŀ	Ä	Æ,	Ä,	'n	٠,	ď	8 8	1		1 8	1 8	1 1	1		1 8	Λ	ı)	ıì	V	V)	V)	Y,	Y,	Y,	ı,	3	3	8	8	۱,	8	Ä	y	Á.	ري اھ	A,	'n)	ĺ,	8	V	Y)	ì	6	8	ΝĚ	V	N	١,	٤,	×	Ś	V)	N	N	λ	8\	s'	'n,	'n	ì	ı,	λ	٤
-	•	•	ľ	•	1	_	٦,	•	1	•		٠	•	•	Κ	7	7	7	7	7	7	- '	•	•	•	•	•	•	•	•	K	/	/	' '	/,	/	7	7	ζ,	J	ľ	1	1	1	7	7	7	ν,	7	7	Ι,	٦	ľ	7	Ϊ,	٦,	\	\	\	\	7,	7	\	Ι.	\	^	ν,	۲	' '	7	\	/	\	7	7	r	/	' /	`	7
			ہ ا		اه		a	9 9	ıla	۵		4	â	a	6	\a\	ø,	œ۱	W)	'n	K		9 (3 (9		1 0	. 6		al d	λ	'n	١	١	۱۵	٠,	•/	u١	ı٦	اه	al.	ı۱	aħ	•	λ	λ	ď	w'	`	7	y	à	۱.	∕ ₀	١,	١,	ιà	۱	Ve	1	1	١	ı	A	y	y	ď	∿	ı٧	١.	١,	١	ď	y	ď	٨	١	ď	'n

Field	Cols.	
1	1-4	Year
2	5-7	Day
3	8-9	Hour
4	10-11	Minutes
5	12-17	Seconds
6	25-34	Time maximum
7	44	l, ephemeris tape data input
		0, ephemeris cards data input
8	45	l, visual sightings only
		0, all sightings desired
9	46	1, negative elevations permitted
		0, only positive elevations desired
10	47	l, ephemeris cards punched
		0, no punched cards

Request Card
XYZLAR

```
JOB
                                                               XYZLARB2 TEST
                                          RUN
                                                               XYZLARB2, DATA
0026+428481-2859292
                                                          4040 9 0026015CHENECTADY NY
                                                                                                                                               GE132 6016
                                                                                                                                                                                                               45
1962239071919.000
                                                                                                                       7.1
MARINER JPL 3
  0.0000000+000 0.1261537+000 0.9894477+000-0.2643508+000
  0.3000000+002-0.2140776+001-0.5406414-001-0.1112388+001
  0.6000000+002-0.3555717+001-0.1370979+001-0.1418331+001
  0.9000000+002-0.4681876+001-0.2591086+001-0.1604181+001
  0.1200000+003-0.5668458+001-0.3736457+001-0.1741359+001
  0.15 \cup 0000 + 003 - 0.6571064 + 001 - 0.4827227 + 001 - 0.1852486 + 001
  0.1800000+003-0.7416836+001-0.5876545+001-0.1947488+001
  0.2100000+003-0.8221219+001-0.6893212+001-0.2031574+001
  0.2400000+003-0.8993919+001-0.7883390+001-0.2107805+001
  0.2700000+003-0.9741469+001-0.8851568+001-0.2178128+001
  0.30 \\ 0.00 \\ 0.00 \\ + 0.03 \\ - 0.1046850 \\ + 0.02 \\ - 0.9801128 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.2243854 \\ + 0.01 \\ - 0.224385 \\ + 0.01 \\ - 0.224385 \\ + 0.01 \\ - 0.01 \\ - 0.01 \\ + 0.01 \\ - 0.01 \\ - 0.01 \\ + 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0.01 \\ - 0
  0.3300000+003-0.1117842+002-0.1073469+002-0.2305907+001
   0 \bullet 36 \dot{0} 0 \ddot{0} 0 \ddot{0} + 003 - 0 \bullet 1187383 + 002 - 0 \bullet 1165433 + 002 - 0 \bullet 2364962 + 001 
  0.3900000+003-0.1255675+002-0.1256172+002-0.2421528+001
  0.420000+003-0.1322879+002-0.1345823+002-0.2475995+001
  0.4500000+003-0.1389125+002-0.1434501+002-0.2528668+001
  0.4800000+003-0.1454522+002-0.1522302+002-0.2579795+001
  0.5100000+003-0.1519158+002-0.1609307+002-0.2629574+001
  0.5400000+003-0.1583111+002-0.1695589+002-0.2678168+001
  0.5700000+003-0.1646443+002-0.1781206+002-0.2725714+001
  0.6000000+003-0.1709210+002-0.1866213+002-0.2772325+001
  0.6300000+003-0.1771461+002-0.1950657+002-0.2818100+001
  0.6600000+003-0.1833237+002-0.2034578+002-0.2863120+001
  0.6900000+003-0.1894574+002-0.2118013+002-0.2907457+001
  0.7200000+003-0.1955507+002-0.2200996+002-0.2951173+001
  0.7800000+003-0.2076268+002-0.2365717+002-0.3036952+001
  0.8160000+003-0.2136145+002-0.2447506+002-0.3079104+001
  0.8400000+003-0.2195716+002-0.2528945+002-0.3120815+001
  0.8700000+003-0.2254998+002-0.2610052+002-0.3162118+001
  U.900000+003-0.2314010+002-0.2690846+002-0.3203043+001
  0.93 \\ \cup 0000 \\ + 003 \\ - 0.2372766 \\ + 002 \\ - 0.2771343 \\ + 002 \\ - 0.3243616 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 00100 \\ + 
  0.9600000+003-0.2431281+002-0.2851560+002-0.3283861+001
  0.9900000+003-0.2489567+002-0.2931509+002-0.3323800+001
  0.1020000+004-0.2547638+002-0.3011204+002-0.3363452+001
  0.1050000+004-0.2605503+002-0.3090657+002-0.3402834+001
  0.1080000+004-0.2663173+002-0.3169880+002-0.3441964+001
  0.1110000+004-0.2720658+002-0.3248881+002-0.3480855+001
  0.1140000+004-0.2777965+002-0.3327672+002-0.3519522+001
  0.1170000+004-0.2835103+002-0.3406261+002-0.3557977+001
  0.1200000+004-0.2892080+002-0.3484657+002-0.3596231+001
  0.1230000+004-0.2948903+002-0.3562868+002-0.3634295+001
  0.1260000+004-0.3005577+002-0.3640900+002-0.3672179+001
  0.1290000+004-0.3062110+002-0.3718761+002-0.3709891+001
  0.1320000+004-0.3118506+002-0.3796457+002-0.3747441+001
0337+189167+1556833
                                                                                               SOUTH POINT (HAWII) 111
                                                          1372 611
                                                                                                                                                                          031061
                                                                                                                                                                                                               45
1962239071919.000
MARINER JPL 3
```

ENDDATA

ENDOFJOBR

ВНАВНВИВИВЕВНВИВ MARINER JPL 3 LUCK ANGLES FOR SCHENECTADY NY K.A. AZIM ELE! RANGE SUNS TLLUMI * DEC TIME DEG. DEG ANG, ANG, KM. ELEV NATION+ Z 124.943 112.920-42.739 8944. -27.9 28.04 719.32 -42.163 239 -32,097 -24,755 46 934-75 343 11 575-71 611 21473. -24.1 110.3* 31609. -19.9 111.5* 185,735 536 230 819.32 201,855 -20,551 9,515-67.447 A49.32 209.493 41438, -15,3 110,4* 250 15,815=64.340 22,815=61.443 50369, -10.4 189.4* 58847, -5.4 188.6* -17.829 -15.909 919,32 214.122 239 58847. 239 217.297 31,191 =>8,358 66961. 239 1019.32 219,638 -14.474 -0.1 108.0* 1049,32 221.448 -13,356 39.383-44.941 747/2. 5.3 107.5. 230 47.063-51.1.7 10.8 10/.0* -12.458 82321. 1119.32 250 222.892 54,128-46.9 8 89641. 16.2 100.6+ 200 1149,32 224,667 -11,719 230 1219,32 1249,32 225,038 -11.099 -10.570 6n.594-42.342 96761. 21.7 106.3+ 66.537-17.543 103701. 27.2 196.04 225.848 239 12.050 - 12.5-2 32,5 105.8* 110483. 226.525 239 1319,32 -10.113 230 1349,32 227,093 ,9,713 17,229-27,349 117126. 37.6 105.6 42.4 105.4* 46.9 105.2* 227,568 -9.359 82,164-22.017 123445. 239 1419,32 227.962 84.941-16.615 ARnnou. -9.144 239 1449,32 91.636=11.171 1519.32 228,287 -8,759 136384. 50.8 105.1* 236 96.327 #5.6*2 101.086 -0.216 105.989 5.116 54.0 104.9* 56.1 104.8* 1549,32 22^P .591 22^P .764 -A,502 142/35. 239 148H27 -8.266 1419,32 234 154074 57.2 104.7* 228,929 1449.32 -B. 649 239 161192. 1719,32 =7,848 111.116 10.448 56.9 104.6: 230 229,054 -7.661 -7.4P6 116,551 +5,558 122,384 20,443 167194. 55.3 104.5° 52.7 184.4° 729.145 1749.32 239 173291 1410.32 229,206 230 179397 49.2 104 128.708 25.0.9 1849,32 229,242 -7.321 239 185521. 229.259 135,614 29.279 45.0 184.2* -7.165 1010,32 2.40 143.177 (2.9/8 191473. 40.4 144.2+ 239 1940.32 229,260 -/.016 197861. 151.434 46.073 35.4 164.1* 2019.32 229.248 -6.875 239 229.229 229,205 2n49.32 2119.32 -5.740 160 359 18 441 204092. 30.2 104.0* 239 210372, 169.833 40.042 24.8 104.0 . -5.611 230 179.641 40.644 216704. 19.3 103.9* 200 2140,32 229,180 -6,487 223096. 189.499 #0.342 13.8 103.9* 2219.32 229.556 -6,368 230 229532. 2749,32 -6.254 199.110 19.017 8.3 103.94 229,136 239 2.9 193,84 236029. 229,122 -6.144 208.239 36.972 230 2310,32 24257K -2,5 103,8+ 216.741 44.114 -4,838 239 2349,32 229,116 249176 224.563 40.6 2 -7.7 103.74 229,119 -5,936 240 19,32 255618. -12.7 103.7* 262498. -17,5 103,7* 49.32 231.736 26.544 -5,838 240 229,134 238,326 22,156 -5.743 240 110,32 729,160 244.426 17.411 25n-135 12.424 255.549 7.211 26n,764 1.976 269209. -22.0 103.7* 275044. -26.0 103.6* 829.198 -5.653 149.32 240 -5.566 -5.482 219,32 229.249 240 282494. -29.6 103.6* 229,313 240 249.32 289458. -32.7 103.64 241 229.389 -5.4n3 310.32 265.870 -3.382 296202. -35.0 103.6* 229,477 -5.326 240 349,32 229.576 270.959 +8.770 3n2941. -36.5 1u3.6+ -5,253 419,32 2 4 n 3n9458 -37.2 103.5+ 316342 -37.1 103.5= 2/A 123m14 144 281 461m19 479 229,686 -5,184 246 449.32 229.805 -5,117 240 519,32 >29,933 322985. -36.0 103.5* -5.054 287,083-24.667 240 540,32 329879. -34,1 103,5+ 293,111-29.7.7 240 619,32 230.067 -4,994 336114. -31,5 103.5* 290,689-44,511 -4,938 240 649,32 230,208 306,970-38,937 342584, -28,2 103,5. 230,353 -4.884 719,32 240 348983. -24.4 103.5* 315,112=43.023 241 749,32 730.500 -4,833 355005. -20.2 103.4+ 324.249.46.480 F19,32 230.649 _4.784 260 361545. -15.5 103,4+ P49,32 230,799 -4.739 334.429-49.197 240 345.544-51.0 18 347700. -10.7 103.44 2 4 n 230.946 -4.696 919.32 373769. 357,274-51,777 -5.6 103.4. 240 949.32 231,091 **44,655** 1019.32 231.231 379751. -0.3 103.4* -4.616 9,119-51.436 240 20.540-50.012 31.134-47.614 385646. 5,1 103,4* 1049,32 -4,580 240 391456. 10.6 103.4+ 1119,32 231,495 -4.546

POSE

(Point Search Ephemeris)

INPUT DECK:

Manual Schedule Tape Mode

INPUT DATA:

(1) Request card:

Cols 1 - 5: T-start in minutes (DDDD.)

(minimum period expected)

Cols 6-8: $\triangle t$ in minutes (DD.) (time increment

used to increase period)

Cols 9-13: T-stop in minutes (DDDD.)

(maximum period expected)

Col 14 output options:

1 = long form requested

2 = short form requested

- (2) Standard Observation Card
- (3) Standard Station Card(s)
- (4) Option Card:

Cols 1-4: -1 = read another unit of input data (cards 1-4)

0 or blank = terminate program

OUTPUT:

Logical tape 11 contains a table of look-angles, for each station requested, in either long or short format. The short form of output consists of look-angle information, time of crossing in days, hours, and minutes of Zebra time; elevation and azimuth angles; and slant range in kilometers. The long form includes, in addition, the Cartesian coordinates of the station and object.

The TELTYP program may be used if teletype transmission is required.

	Ī		Τ	2			3		4	1																																																				
8 8	0	0 0	10	0	0	0	0	0 (10	6	6,	a)	7	7	S	b)	7	V	<u>ر</u>	9	λō	0	6	ď	ý	7	Ó	7	9	7	ĺŽ	ď	oν	1	1	1	79	<u>ر</u>	70	7	7	7	7	7	Ž	6	70	7	Z		6	7		7	V	Ą	4	7	N	2	λ	7
1 2	1	4 8	5 6	7	•	10	11	12 1	3 14	ķ	À	Æ,	101	6)	(2)	₍₂₂)	7	įλ	γs.	2/1	, j	ιò	Ġ1	ħ)	N S								ý	λųs	m,	ęγ	ę١	À	51/4	5 X	į	λ	s),	ıλ	þ	þ	υķ	λþ	'n,	ję d						Ŋ	À,	Ń	Ŋ,	λ'n	λ	À
1 1	1	1 1	1	1	1	1	1	í 1	1	K,	Y	Ì	1	У	1	ľ	1/1	Y	1	1	V	1	1	1/	(1	1	1	V.	1	N	Y,	Y,	1	1	1/	1/1	1	X	N	У	Y	Z		/	Á,	X,	1	/	1/	1,	1	V	1/	1/1	/,	Y	1	/	$^{\prime\prime}$	1	1	1
2 2	2	2 2	2 2	2	2	2	2	2 2	2 2	K	×	Ŋ	2/4	ξþ	(y	⁽²⁾	ξŻ	ζþ	λ	ąγ	ξŻ	(À	³	Ŕ)	*	λį	Y	×	λ	2\V	, X	'n	λ	y	Á,	X)	1/3	ş	℀	ś,s	à	λ	₹\	ξķ	K)	ď	X	y	X	X	Ϋ́	λJ	K)	1	γį	13	δj	٤)	1/3	(X	,	'n,
3 3	3	3 3	3 3	3	3	3 3	3	3 :	3 3	1	£	3	3)	٤)	\ 3	3	٤)	13	y)	٤)	()	1/3	y)	Z))	3/3	1	À	<u>'</u> 3	3/	ťλ	\ <u>3</u>	3/2	l)	ď	3	V	b	Ä)	ίį	/3	3	a)	١,	13	ð	şγ	ί	,	3/	1	J,	X	×	3/4	Z	X	À	3/2	13	ð	Ì
4 4	4	4 4	1 4	4	4	1 4	4	4 4	1 4		À	ď,	X)		V	X)		V	A,		V	V	X)	Y,	λ	λ	()	'n	᠕	()	W	Ý	X)	V	Ý	4	7	Y	λ	N	V	Y)	X)	λ	V	X)	Y)	Ŋ	Ŋ	'n	ζ)	Y	λ	4	4	Þ	Ŋ	⇃	ί,	()	Y	Y,
5 5	5	5 !	5 5	5	5	. 5	5	5 !	5	ļ	۶ /	۶,		'	/	1	ς,	/	/	7	\ 5\s	\)	5	6	$\langle \cdot \rangle$	ζ,	5	٦		15	7)	\ 1\5	7		λ <u>}</u>	<u>\</u>	ر. درو	$\langle \cdot \rangle$	/	1	<u>}</u>	\ 5\e	/	\	<u>}</u>	5/5	1	/	<u>,</u>	15	٤/	<u>, </u>	<u>,</u>	5	6	ž .)	15	3	5
			1		- 1				1		١,	ι,	ν,	\	Λ.	Ι,	\	\	Ι.	Ι.	\	\	\	\	\	. \	. \	. \	、 `	ν,	ι)	ν,	ν,	ι,	ι,	ν,	ι,	ι,	ι\	. \	`\	/	\	\	\	\	\	Ι.	Ι,	Ι,	ι,	√)	ι)	ν,	ν,	' '	√,	ι,	Ι,	<i>\\</i>	Ι,	′)
6 6	6	6 (6	6	6	6	6	6 (6	Ę	Ì	À	6/	6)	(þ	/e/	6)	i)	6	ęγ	į	/ę	Æ)	6)	E (1/6	16	Ì	ď	6/6	Ì	ď	\$ /\$	À	À	6/	1	ď	١	1	16	Æ,	()	()	6/	6	()	()	6	βY	ď	1	þ	6/4	6/6	F	À	N	6/4	E	À	þ
77	7	7 7	7	7	7	1 7	7	7	7	×	4	4	(y	r)	Ŋ	γ\	Z)	Ŋ	V,	X)	λì	y	A,	X	Y	y,	1	Y	'n	7	(у	$^{\lambda}$	γy	<i>()</i>	'n	γ	Ó	þ	Ŋ	ď	X	Y	y,	λ	$\sqrt{2}$	A,	X	ý	y'	X)	7)	ĺγ	ş/	Ò	r)	þ	Ŋ	₹/	r)	ĺγ	ş	Į)
8 8	8	8 1		8	8	8 8	8	8 (8 8	1	6,	ď	1	Y,	1	A,	à,	1	A,		$V_{ m \prime}$	/F	Y,	Y	*	7	6,	'n	4	•	18	v	, j	Y8	ر. ا	a)	V8	'e	X)	r)	Ý	'n	•	()	()	, d	λ	1	Y		V	Y	X)	X)	'n	A	A)	a)	V)	M)	A,	K,

Field	Cols.	
1	1 - 5	T-Start in Minutes
2	6 - 8	Δt in Minutes
3	9 - 13	T-Stop in Minutes
4	14	1, Long Form of Output
		0, Short Form Output
	Note:	Decimal points may be punched anywhere in each of the first three fields.

Request Card POSE

S S S S S

			SAT 100 USED FOR UNKNOWN NDBMEWS153	
	121 4002		USED FO 53	505 1054 RNL153 ITY132 DA 152 3450
			SAT 100 ANDBMËWS1	TOMSK UŞSR SONDRESTROM AFB GRNL153 BAYSIDE NEW YORKCITY132 FT CHURCHILL CANADA 152
ļ	972 LSTONE MAS	16465 STATION X	303 IULE GREENL/	OITOMSK UŞSR OISONDRESTROM / BAYSIDE NEW / SOIFT CHURCHILL
∢	OIMIL	104 16 ST	29 303 SAT 100 (06.1601THULE GREENLAND&MEWS153	OITOMSK UŞSR 505 1054 056101SONDRESTROM AFB GRNL153 BAYSIDE NEW YORKCITY132 020301FT CHURCHILL CANADA 152 3450
POSEB2,DATA	204 20 1560 5100001			1140 0 0 300 0
JOB RUN	ø .	80. 5. 130.1 00 010223155854000631 426175 714922 156	474	+0849467 +0509834 +0738000 +0940333
80. 2. 130.1	31 101101201175 0001 426175 0714922 -1	80. 5. 13 000 01 426175	80. 5. 130.1 100 202271017. 0616+765638+0683108	0650+564684+0849467 0561+670000+0509834 0553+407000+0738000 0203+587000+0940333

ENUOFJOBR

ENDDATA

```
POINT SEAPOH PROGRAM
STATION LATITUDE = 76.5638 LONGITUDE = 291.6892 EAST HEIGHT = 349. METERS
 URSERVED TIME = 58. DAYS 10. HOURS 17. MINUTES 47.40 SECONDS OMT
ELEVATION = 64.0000 ATIMUTH = 2.9000 RANGE = 303(0 KM/11
 THETAG = 311.22012 DEGREES
THETAS = 242190932 DEGREES
 CAPR = 6358.216 KM
GEOCENTRIC STATE IN LATITUDE = 1.33477 RADIANS
 XT = 549.491 FTA # -1381.569 ZFTA # 6181.929 KM
DECL # 1.3509 RA # 0.9951 RANTANS
CAPX # +677.104 CAPY # +1323.708 CAPY # 5181.929 KM
THE COORDINATES OF THE POINT IN THE INETTIAL REFERENCE=SYSTEM APE
x = -641.181 y = -1258.236 Z = 6477.534 KH+
Baraasasasas 616
THILE GREENLANDBM#WS ALE
ZEBRA TIME ELEY AZTM R
DAY HR MIN ANG. ANG.
50 11 37.79 25.7 294.0
                                    UNIDENTIFIED OBJECT+
THULF GREENLANDSMEWS
                               RAVEE
                                  K4*
                                  584+
  56 11 42.79 24.2 293.8
56 11 47.79 22.2 293.6
                                  511 .
                                  538+
  56 11 52,79 21.5 293.6
58 11 57.79 20.4 293.6
                                  6554
                                  593.
  5<sub>6</sub> 12 2.79 19.3 293.6
                                  721 *
                                  75n+
  56 12 7,79 18.4 298.7
                       293.9
  56 12 12.79 17.4
                                  779+
  Es 12 17.79 16.3
                      294.1
                                  805+
  5e 12 22.79 15.4 294.3
58 12 27.79 14 1 294 5
                                  835*
                                  8630
TÓMSK USSR
                            65Q
                                    UNIDENTIFIED DOJECT#
ZERRA TIME ELEV AZIM RANGEO
DAY HR MIN ANG. KHO
NU VISUAL PASSES*
● 选
BEREEBBBBBBBBBBB
                          561
                                    UNIDENTIFIED DEJECT+
SUNDRESTROM AFR GONL
ZEBRA TIME PLEV AZTM
DAY HR MÍN ANG: ANG.
                                RAVEFO
NU VISUAL PASSES*
* %
```

OR.PS

(Orbital Plane Search)

INPUT DECK:

Manual Schedule Tape Mode

INPUT DATA:

The input data is in units consisting of an element set, a station card, and a request card. Any number of units may occur. The last unit must be followed by a blank card to terminate the program. Each unit will consist of:

- (1) Standard element set (6 or 7 cards)
- (2) Standard station card
- (3) Request card:
 - Cols. 1-10: Start time of search (days of year)
 - 11-20: Time increment between search points (minutes)
 - 21-30: End time of search (days of year)
 - 31-40: Observing station's search azimuth angle (degrees)
 - 41-47: Station's maximum slant range (kilometers)
 - 48-57: Station's minimum elevation angle (degrees)
 - 58: 1 punch—visible passes only.
- (4) Blank card, will terminate the program. The card should follow the last repetition of (1) to (3).

OUTPUT:

The search point data for a satellite is preceded by the satellite elements, request information, year constants used in the calculations, and the station data. Each line of the search point data consists of the year, month, day, hour and minute; the right ascension, declination, azimuth and elevation in degrees; the slant range in kilometers; and the elevation and illumination angles of the sun in degrees. The information is in order of increasing time during the range requested. If only visible passes were requested, a check is made and only visible points will appear in the output.

0 0	0 0	n n	- t-									J			- [4					5		1		- 6	•			-17	ł.														
		vv	0 10	0 0	Ī	0 0	0 0	0 (10	0	0 0	0	0 0	0	0 (0	0 (0 0	0	O O	0 0	0	0 0	0 0	0 (0	0 0	0 0	0	0 0	0	o o	M	N	M	N	V	M	No.	VV	v	4	8 8	7	7	Y	4
	6 7		10 11	12 1	3 14	15 16	17 10	8 19 2	921 2	2 23	24 2	26	27 20	29	30 3	1 32	33 3	4 35	38 :	37 36	30 40	41 4	2 43	44 4	5 46 4	48 -	19 50	51 5	2 53 :	54 55	56 :	57 54	À	ed o	/ex	e fe	ſφ	40	/y	γh,	iyo	42/	yυ	B	k/	ψ	b
1	11	11	1 1	11	- 1	11	11	1 1	1 1	1	1 1	1	11	1	1 1	1	1 1	1	1	1-1	1 1	11	l 1	1 1	1 1	1	1 1	1 1	1	1 1	1	1 1	V	Ŋ	/y	Ŋ	/¥	()	/y	N,	ĺλ	Ŋ	Уţ	A)	ľ	Y)	A)
		•		1	_							_																	_		_	. _	Ŋ	7,	1)	7	Ŋ	77	Ŋ	7,	//	Ü	7.	//	1	Λ,	7)
2 2	22	2 4	2 2	2 2	. 2	2 2	2 2	2 2	2	2	2 2	2	2 2	2	2 2	2	2 2	2 2	2	2 2	2 2	2 2	2 2	2 2	2 2	2	2 2	2 2	2	2 2	2	2 2	1	7 8	(8	X	X	ZZ	8	ŔΙ	₹₹	٦,	<u> 2</u> 2	\λ	Ż	/s	Ŋ
			2	3			9 1					•	2 2		ی	, ,	,		,	2 2	2 2	ا وا	2 2	, ,		,		2 2		2 2	,	, ,	1		17		19)	17		1/	Ά,	' /'	6	<i>ا</i> ر	./'	1
3 3	J	3 3	3 3	3/3	. 3	3 3	3 3	133	٠ ١٥	, ,	3 3	3	3 3	3	3	, ,	Э,	, ,	J	3.3	3 3	3	3 3	3 3		3	J	3 3		3 3	3	3	1	,,,	1	44	1	77	1	7,	7	γ,	44	١,	١,	1,	4
4 4	4 4	4 4	4 4	4.4	1 4	4 4	4.4	14/	14.	14	4 4	4	4 4	4	4/4	1 4	4	4 4	4	4 4	4 4	4	4 4	4 4	4.4	4	4 4	4 4	4	4 4	4	4 4	W	N	V	λ	Ż		ľχ	1	W	,	* }	λ	λ	V	W
									ļ						1							1				}						1	1	ί,	//	//	1		1	//	1	7)	1	Λ	Ζ,	//	1,
5 5	5 5	5 5	5 5	5 5	j 5	5 5	5 5	5 :	5 5	5 5	5 5	5	5 5	5	5 :	5 5	5	5 5	5	5 5	5 5	5	5 5	5 5	5 5	5	5 5	5 5	5	5 5	5	5 5	4	λ,	18	,5,3	1	Z)	1	Æ,	įį	2	é/é	() (1	i 5	k,
																																	1	7,	//	"	7))	7	7	77	7,	//	γ,	7)	" ,	"
6 6	5 5	5 6	6 6	6 6	i 6	6 6	6 6	j 6 (16	i u	6 6	6	6 6	6	Ы) b	6	5 6	6	6 6	6 t	6	6 6	6 6	6 t	6	6 6	6 6	6	6 B	ţ	9	1	9	10		١,	64	Α,	P)	7	b,	φþ	1	bλ	99	9
7 7	77	77	7 7	7 7	, 7	77	7.7	, , .	٠ جار	7	7 7	7	7 7	7	7	7	7	1 1	7	17	7 7	ļ, .	7 7	7 7	7 7	7	7 7	7 7	7	7 7	,	, ,	1	۵/A	/3/	3/3	Ŋ	γ_i	Y,	7)	χX	λ,	λÀ	λ,	۱,	ι),	Έ.
, ,		• •	Ί.	•	•	• •	′ ′	′ '	1		• •	•	• •	•	Ή	•	•	'	•	•		1	•			ľ	• •	' '	'	, ,	•	Ί΄	1	IJ.	//	Ί,	//	//	1	//	//	Χ,	()	Ί,	')	Λ.	7,
			٠١.										0 0		، اه			2 2	2		2 0									ه ه		e e	17	λ.	77	7 9	r y	9 9		1	· /• '	6	⊌ ' ⊌	· • ·	~ ∕	۰/۰	ø,
	2 2 3 3 4 4 5 5 5 6 6 7 7	2 2 2 2 2 3 3 3 3 3 4 4 4 4 4 4 5 5 5 5 5 6 6 6 6 6 6 7 7 7 7	2 2 2 2 2 2 2 4 3 3 3 3 3 3 3 3 3 3 4 4 4 4	2 2 2 2 2 2 2 2 2 2 3 3 3 3 3 3 3 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 3 3 3 3 3 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 3 3 3 3 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 3 3 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 7 2 7 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	2 2 7 2 7 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2	2 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2 7 2	2 2 7 2 7 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2	22222422222222222222222222222222222222	22722122222222222222222222222222222222	22722122222222222222222222222222222222	22722/22222222222222222222222222222222	2 2 7 2 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2 2	22722122222222222222222222222222222222	22722122222222222222222222222222222222	22722/22722222222222222222222222222222	2272/22/22/22/22/22/22/22/22/22/22/22/22	2272/22/22/22/22/22/22/22/22/22/22/22/22

	Field	Cols.	
	1	1-10	Start Time
	2	11-20	Time Increment
	- 3	21-30	End Time
	4	31 - 40	Search Azimuth
•	5	41 - 47	Maximum Slant Range in Kilometers
	6	48-57	Minimum Elevation Angle in Degrees
	7	58	l, Visual Passes Only

Request Card
ORPS

ORPSB2 JOB RUN ORPSB2.DATA 33 13 160 GAMMA 3 33 13 21960 1100 • • 024445879 51.287999 176.37720871 1960 176.37720871 33 13 3 .06497800 291.27649 166.96225 1.04471998 33 13 4-5.3074610E-09- 4.9070522 3.7491586 -4.1834998E-05 33 13 5-0. E- -0. E-E--0. E-33 13 60. 0. 0. 0. 0300+107330+0616000 140 5 030001TRINDAD 159 10. 191.33333 120. 190.916670 4000•

ENDDATA

ENDOFJOBR

ORBITAL PLANE STARCH AND XY LOUK ANGLE PROGRAM

SAT NO: 33 EPEM NO. 13* UNBITAL ELEMENTS V.176000000+003 0.377208/1+000 0.64978000-001 -0.53074610-008 0;00000000+000 20,16336178-006 0.00000000+000 0.29127649+003 -0.49070522+001 0,000000000+000 0.16696225+003 0.37-91505+001 0.00000000+000 0.24445879-001 0:51287999+002

TIME BEGIN STEP FIME FNF SEARCH AZJMUTH 190.91667 10.00000 191.33333 120.0000

Prax = 4000. HMIN = 0,

IHELA(U) = 98,674008 LONG SUN = 278,55980 C14 = 3.69265

	AIIG INDA		^M Ł	L A 1 U	TiTune .733m	UMG1 61.01) U D U E = W	ST		SHT *				
•	54	T NU	•	33		NO. 13								
	TI	ME	(2)					20	FNT		ELEV	ILL*		
ηΥ	" UN	DAY	нR	MIM	HΔ	ម្	А	_	ELEV	SH	SUN	ANG *		
60	JUL	Ŋ	5.5	3 m	2/8.3	-21.0	120	Ù	7.5	2471.	. 0.3	6.4+		
6 L	UUL	ರ	22	4ŋ.	277.7	-26.7	120		10.4	2253.	#2.6	6.2*		
Οų	∪ U L	6	5.5	511	274.7	-25.7	120		13.7	2037.	#4.8	5.9+		•
6 U	LUL	ñ	23	ŋ	215.3	-24.4	120		17.6	1824.	± 7 . U	5.7*		
61	υUL		23	10	273.1	-22.7	120	0	22.2	1617.	ک و و	5,5+		
Đυ	يا∪ ت	8	23	211	270.1	-20.4	120	Ö	27.7	1418	=11,5	5.2*		
	JUL	.8	23	3 1	206.8	-17.3	120	0	34.A	1230.	-13.7	5.6*		
	JUL	8	23	4 11	260.2	-13.1	120	1	43.8	1061.	-15.9	4.9+		
6 ը	JUL	b	23	5 n	252.4	-7.2	120	1	55.5	921.	-18.1	4.7*		
	40F	9	()	a	242.2	U.5	120	2	70.4	822.	=24.2	4.5+		
	JUL	9	U	1 N	229.9	9.5	121	5	87.7	782.	≈22.4	4.4*	•	
	a D.F	9	Û	20	214.5	1/,9	299	8	74.8	809.	=24.5	4.2*		
	UUL	9	0	30	204.0	24.1	299	9	59.5	895.	-26.6	4.1+		
_	JUL	9	Ū	40	193.6	28.0	299	9	47.3	1025.	=28.7	4.0+		•
	JUL	9	Ü	5 1	185.7	30.1	300	ď	37.9	1185.	-30.7	3.9+	•	
	JUL		1	Ω	179.8	-31.1	300	0	50.5	1362.	=32.7	3.6+		
	JUL	9	1	1 n	175.6	31,6	300		24.9	1551.		3.7+		•
	بالالد	9	1	. 2 ŋ	1.726	31,-7	3 O.Q	.O	202-	1747		3,6*		
	JUL	9	1	3 N	170.6	31,6	300	0	16.3	1947.		3,5*		* * * * * * * * * * * * * * * * * * *
- 6 0		9	. 1	-40	-169-2-	31-4-	_300_	0	13.0		40-4			
	JOF	9	1	5 n	164.3	31,1	300	0	10.1	2354.	F42.2	3.4+		
* A U		-	5.	-3)		30-7	300_	Q	-7-45-	-2559	43.9			
60		9	5	10	107.,7	30.4	300	0	5.2	2764,	-45.6	3.3*		THE PERSON NAMED IN COLUMN
نبا 🐧 .	-		·\$ -	2-0	-167.7	30.0	300_	Q	-3,1		-47.,2	3,34_		
6 U	JUL	9	2	3 0	168.0	29.7	300	0	1.1		-48.7	3,3+		

ASUM

(Acquisition File Summary)

INPUT DECK:

Manual Schedule Tape Mode

INPUT DATA:

SEAI Tape (A-File)

OUTPUT:

The output consists of the information contained in the A-File of the SEAI tape. The output is sequential according to satellite number and includes satellite number, sensor number, sensor name, pass code (all or visual), format request (short or complete), type (all, 3-point, Baker-Nunn), minimum azimuth, maximum azimuth, minimum elevation, maximum elevation, maximum range, and step size in minutes.

s4.	C T PE	4 K	*	10 B	17	. PD	80 B
J 5 €	INHIB	YES	>->- FI,F1 Ø. Ø	0 0 N	¥0	9.	9 Q
	GAID SIZE B-N GONTROL			•		:	ı
	GRID SIZE	2.0000	3.0000	2.0000	2.0000	2.0000	2.0000
	RAAX	030000	0.5000 0.5000	490 140000 490 4500.8	00001 060	00001 060	090 10000 080 08008
	LMITS) 067 067	1 060	1 060	U90_1	190 1	0.60
V •	1 00 L	3. 3.0. 3.0.0 3.0.0	300	3 U U D U U	5 P ic	ોનું હ	300 1000
•	ACOUTSELEDS LEMITS ARAX (MEG AMAX RMAX	350 350	35n	357 361	Són	3511	3011 361)
ı.	▼ 7 Tµ4	777	000	100 100	n n n	ט ייָ ט	יי יי די
70	1 Y P.E	د (د	درات	ב נג	۶.	7	נא ב
•	नगरमभा	C0M2C 84041	S4041	C0M3L 54041	1c K C D	150FS	Jewco Cowst
	PA35	ALL	A L L	ALL VIS	ALL	V1 3	A V I S.
ř	SENSOL NAME	I ARFOG TEXAS TATALOAP	LAMEDO TEXAS TOTALDAN	JHTTE SANUS JAME JOAFF TEMP	HATTE SANUS JAME	FALL SANDS JAME	AATTE SANDS JA4E APAFB TEMP
ri Fric	SENS	30£	300	723 945	72 4	> 27	727 940
45'''' SU'' SU'' SU'' SU''	SAT	4 4 4 6 6	011	0 6 6 6 6 6	045	620	084 084

SSUM.

(Sensor File Summary)

INPUT DECK:

Manual Schedule Tape Mode .

INPUT DATA:

SEAT Tape (S-File)

OUTPUT:

A listing of the sensor data contained in the S-File is provided. The output includes sensor number, sensor name, latitude in degrees, longitude in degrees, height in earth radii, $x/\cos\theta$ or $-(C+H)\cos\theta$ in earth radii, z or $-(S+H)\sin\phi$ in earth radii, accuracy digit for azimuth, elevation and range, classification, teletype request code, and sensor type.

PAGE 1 SENSOR	ሰንን ዋታ	1 4 4 4 ሀ • O	प्रतिका का क्षेत्र	00 T# CC	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.0000
7. 27. TG.	****	****	· ************************************	תתתונ ונתתח	*****	***
	Z 2 2 2 2	7.2.2.2. 7	*22/2 22/23	*****	2222 2222	2222
ו <mark>ה ל</mark> הפה	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	333000 0) במחסים מחסים מחסים מחסים	00000 00000		000 000 000 000
AGGURAGY ELD RI	00000	70000	0000 00000	79 70 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0000
420	000000000000000000000000000000000000000				0000 0000 00000 00000	00000
L EARLY BAD	-6./26-001 -5./28-001 -5.33-001 -5.32-601 +4.331-031	+5.125-001 -5.410-001 -5.439-001 +2.517-001 -4.55-001 -5.5.4-001	-4.215-001 -4.215-001 -4.215-001 -2.40-001 -3.250-001 -4.250-001 -6.178-001 -1.278-001	7.7.7.00 1.2.9.7.7.00 1.7.4.7.3.5.00 1.7.4.7.9.7.00 1.9.9.9.7.00 1.9.9.9.9.00 1.0.9.9.00 1.0.9.9.00 1.0.9.9.00 1.0.9.9.00		+2.uz7-031 +3.vs2-001 +5.437-031 -2.vz8-001 -4.442-031
4424.5 X/635 14 Earl Hay	-7.3/2+141 -7.5/7-141 -4.1/3+ 41 -4.491-141	-4.0/101 -4.0/101 -4.0/201 -4.0/201 -4.4/401	2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2			-4./43-481 -4.15/-101 -3.501-101 -4.501-101 -4.951-101
05-14-64 DE Mijaif = EARI1 419	+2.440+330 -1.10x+0.15 -2 +2.000+144 +2.420-104	4.6.504-1485 4.9.004-1485 4.9.004-1485 4.6.004-1486 4.6.10-1-1886 6.6.004-1886 6	40. 40. 40. 40. 40. 40. 40. 40. 40. 40.	*1.29***********************************	+2.45.11-1013 +2.45.11-1134 +1.45.11-1134 +1.45.11-1136 +1.45.11-1136 +2.50.11-1136 +2.50.11-1136 +5.50.11-1136	+7.6 . Z - 1136 +8.15 / - 1145 +1.167 - 109 +7.83 - 107
-40 30LTJDR -40 4 342455	- / . 1 - 4 + 10 0 1 + 2 - 3 5 5 5 10 0 2 + 1 - 3 5 4 + 0 0 7 + 2 - 5 5 4 + 0 0 2 + 2 - 3 5 4 + 0 0 2	+1,507+000 +1,5007+000 +1,5007+000 +2,400+000 +2,450+000 +2,450+000 +2,450+000	7.00 + 1.17 + 7.7	1102-001 1102-0	- 1, - 4, 2, 10 U K - 1, - 1, - 1, 2, 10 U K - 1, - 1, 2, 10 U K - 1, - 1, 2, 10 U K - 1, - 1, - 1, - 1, - 1, - 1, - 1, -	-/,/15+001 -/.e//+003 -/5>+001 -/.1//+001 -/.1//+001
. ftTUDE . igrees	++.251+031 +1.255+001 +1.570+031 +5.242+031	-5. L10+0J1 +5. 546+0UL +5. 567+0J1 -1. 546+0J1 +2. 761+0D1 +2. 761+0D1	+2.355-021 +2.355-021 +2.355-021 +2.355-031 +2.355-031 +2.356-031 +2.376-031 +3.376-031 +3.376-031 +3.456-031	++,140-01 +-,141-01 +-,151-01 +-,151-01 +-,158-01	+5,28+03. +5,257+001. +5,14+001. +5,14+001. +5,14+001. +5,14+001. +6,19+001. +6,19+001. +6,19+001. +7,19+001. +7,19+001. +7,19+001. +7,19+001. +7,19+001.	- 4, 177+041 -2, 552+011 -3, 514+011 +1, 714+041 +2, 394+041
ACST TO ACST T	TLLST. 4355 7TLT-17. 4355 7TLT-17. 11. 4255 77 77 11. 12. 42. 42. 42. 42. 42. 42. 42. 42. 42. 4	430M52 1193411 434671 119 9841 4369 120 9841 4369 120 9841 138701 11944	MATTOR FORTAL S SATERY COAN SEST ON THE RECE METHOR THAT STREATH INT SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH SAUTH TO THE SAUTH	######################################	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	AGASIA TITE STA CALEST TITE STA CALEST TITESTA PANTIN ITTENDO
1408 and 1408	102	2. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	10000 61000 		0.4444 12040 0.4444 12040 0.4044 8.8445	2 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4

ISUM

(Information File Summary)

INPUT DECK:

Manual Schedule Tape Mode

INPUT DATA:

- (1) SEAI Tape (I-File)
- (2) Request cards with any of the following entries punched in columns 1-3:
 - (a) Three decimal digit satellite number.

 Any number of cards may be used to request specific satellites.
 - (b) ALL. The ALL punch requests all satellite information, replacing request card type (a).
 - (c) BOX. The BOX punch will provide a box score of still orbiting satellites as additional output.
 - (d) END. The END punch signals the end of request deck, and must be used as part of the input deck.

OUTPUT:

The I-File of the SEAI Tape is written for off-line printing. Information printed out includes satellite number, satellite name, launch date, launch site, booster country and payload country.

INFORMATION SUMMARY

09-10-62

0927.8

SAT. NUMBER CLASSIFICATION CODED SAT. NAME INTERNATIL CODE COMMON NAME LAUNCH DATE LAUNCH SITE LAUNCH AGENCY BOOSTER COUNTRY PAYLOAD COUNTRY MISSION WEIGHT (KG) SHAPE LENGTH (MTR) HEIGHT (MTR) WEDTH (MTR) DIAMETER (MTR) MEAN DRAG VARTANCE RAD X-SEC (6 MT) VARIANCE MEAN REFLECT. VARIANCE TUMB DATE & RATE TUMBL'THE MODE STABIL IZATION MANEUV. CHAR. TRANS. FREQS

RECEIVING FREQS

DECAY DATE
DETERMINED
LIFFTIME (YRS)
HELIO. ELMS. E
A
G1
Q2

I

084

6106 61ZETA DISCOVERER21 18FEB 61 VANDENBERG AFB

INFORMATION SUMMARY

09-10-62

084

0927.8

SAT. NUMBER CLASSIFICATION CODED SAT. NAME INTERNAT'L CODE COMMON NAME LAUNCH DATE LAUNCH SITE LAUNCH AGENCY BOOSTER COUNTRY PAYLOAD COUNTRY MISSION WEIGHT (KG) SHAPE LENGTH (MTR) HEIGHT (MTR) WEDTH (MTR) DIAMETER (MTR) MEAN DRAG VARIANCE RAD X-SEC (6 MT) VARIANCE MEAN REFLECT. VARIANCE TUMB DATE & RATE TUMBL'THE MODE STABIL IZATION MANEUV. CHAR. TRANS. FREQS

RECEIVING FREQS

DECAY DATE
DETERMINED
LIFFTIME (YRS)
HELIO. ELMS. E
A
G1
Q2
1

6106 61ZETA DISCOVERER21 18FEB 61 VANDENBERG AFB

TELTYP

(Teletype Output Conversion)

INPUT DECK:

Manual Schedule Tape Mode.

INPUT DATA:

Tape 1! is scanned for sentinels marking the beginning and ending of messages to be converted to teletype code. All appropriately marked messages will be converted.

Sentinels used:

- 1. BBBBBBBBBBBBBBB (14 B's): this sentinel marks the beginning of a message to converted.
- * \$: the asterisk followed by a dollar sign marks the end of a message to be converted.

OUTPUT:

Tape 11 contains the data converted to Baudot code following output previously written on the tape.

BMEWSPT

(BMEWS Paper Tape)

INPUT DECK:

Manual Schedule Tape Mode.

INPUT DATA:

Tape 0 should contain the Q point data from

the DIP as described in the writeup.

OUTPUT:

Tape 7 will contain observation information

in the standard format required for input to

ORCON.

BMEWSPT

(BMEWS Paper Tape)

INPUT DECK:

Manual Schedule Tape Mode.

INPUT DATA:

Tape 0 should contain the Q point data from

the DIP as described in the writeup.

OUTPUT:

Tape 7 will contain observation information

in the standard format required for input to

ORCON.